

COMPLETE CATALOGUE

TOP QUALITY AND BIGGEST RANGE



PROTEKTOR[®]

INTERNAL PLASTERING | WET ROOMS | EXTERNAL RENDERING | THERMAL INSULATION
INTERNAL CONSTRUCTION | DRY LINING / LIGHTWEIGHT STEEL CONSTRUCTION
CURTAIN WALL | VENTILATION PROFILES | ROOF DRAINAGE | CONCRETE / SCREED

www.protektor.com



PROTEKTOR SUSTAINABILITY

**For the sustainable future of the construction industry,
we at Protektor are turning in a special circle:
The Green Circle – by Protektor**

Protektor is the European market leader for building profiles. We are therefore aware of our special responsibility to continuously make the development and production of profiles more sustainable. We do this – with a great deal of commitment, a clear attitude and with the Green Circle.

Our corporate philosophy is based on a deep understanding of the importance of sustainability in the construction industry and the impact of entrepreneurial activity on the environment, society and future generations.

Protektor therefore sees sustainability as an integral part of the company. We are committed to taking ecological, social and economic aspects into account in all our business processes. We focus on using resources sparingly, using environmentally friendly materials and minimizing environmental impact.



ALL THE INFORMATION UNDER :

www.protektor.de/sustainability



SCAN NOW »




CONTENT

CONTENT

OVERVIEW	
Protektor - Profiles for modern building	4
OVERVIEW ICONS	
Overview icons	13
PROFILE SELECTION	
Table - Profile selection by mortar type	14
INTERNAL PLASTERING	
Corner profiles	16
Flatness guides	24
Shadow joint profiles	26
Plaster stop profiles	27
Base profiles	30
Joint profiles	31
Images bar	33
Plaster bases	34
EXTERNAL RENDERING	
Corner profiles	37
Plaster/render stops	41
Base profiles	42
Connecting profiles	43
Joint profiles	47
Design profiles	48
Wired corner beads	49
CORROSION PROTECTION	
Edge profiles Corrosion protection	53
Plaster gauges Corrosion protection	57
Plaster Stops Corrosion protection	58
Base profiles Corrosion protection	60
PVC profiles	62
SOFFIT CONNECTION PROFILES	
Tables - Selection of plastering strips/plaster sealing strips...	65
Soffit connection profiles	67
THERMAL INSULATION	
Corner profiles	76
Plaster/render stops	79
Drip edge profiles	80
Connecting profiles	81
Base profiles	82
Joint profiles	88
Edging profiles	91
Profiles for mechanical fixing	92
Profiles for insulating plaster	93
Insulation dowels	94
MESH	
Reinforcement mesh	95
Reinforcing mesh External rendering	96
Reinforcing mesh Internal plastering	98
Reinforcing mesh Thermal insulation	99
INTERNAL CONSTRUCTION	
Corner profiles	103
Plaster stop profiles	111
Shadow joint profiles	116
Connecting profiles	122
Design profiles	124
Joint profiles	125
Edging profiles	127
Images bar	129
Composite profiles	131
Joint cover strips	136
Profile adhesive	137
Tools	139
CONSTRUCTION CHEMISTRY	
Construction chemistry	143
DRY LINING	

Standard ceilings and walls	146
MAXI-TEC	156
Special products	158
Preformed parts	166
Standard accessoires	169
Formable profiles flexibilo	180
Joint tapes	184
Fixing accessories	186
Anti corrosion defendo	189
Sound Insulation silencio	201
Lightweight steel construction edificio	205
Supports and door systems passagio	215
LED-Lightning Design lumino	225
Tools	231
CURTAIN WALL	
Product information	233
Corner profiles	236
Connecting- and stop profiles	249
Joint profiles	258
Joint tapes	267
Angle profiles	271
Omega Profile	274
VENTILATION PROFILES	
Product information Ventilation profiles	276
Protektor ventilation system (PLS)	280
Ventilation profiles	283
Eaves ventilation	299
Special profiles	302
ROOF DRAINAGE	
Product Information	303
Halfround gutters	304
Box gutters	317
Gutter accessories	326
Gutter pipes and accessories	327
Carport gutters	346
Leaf traps	348
Roof plates	350
Gutter sets	353
Tools	363
CONCRETE/SCREED	
Product information	364
Joint profiles	367
Heat conduction plates	371
Stair corner profiles	372
Gravel trap strips	374
PRODUCT INFORMATION	
Product information plaster / WDVS	377
Safety through rounded edges	379
Product information dry construction	380

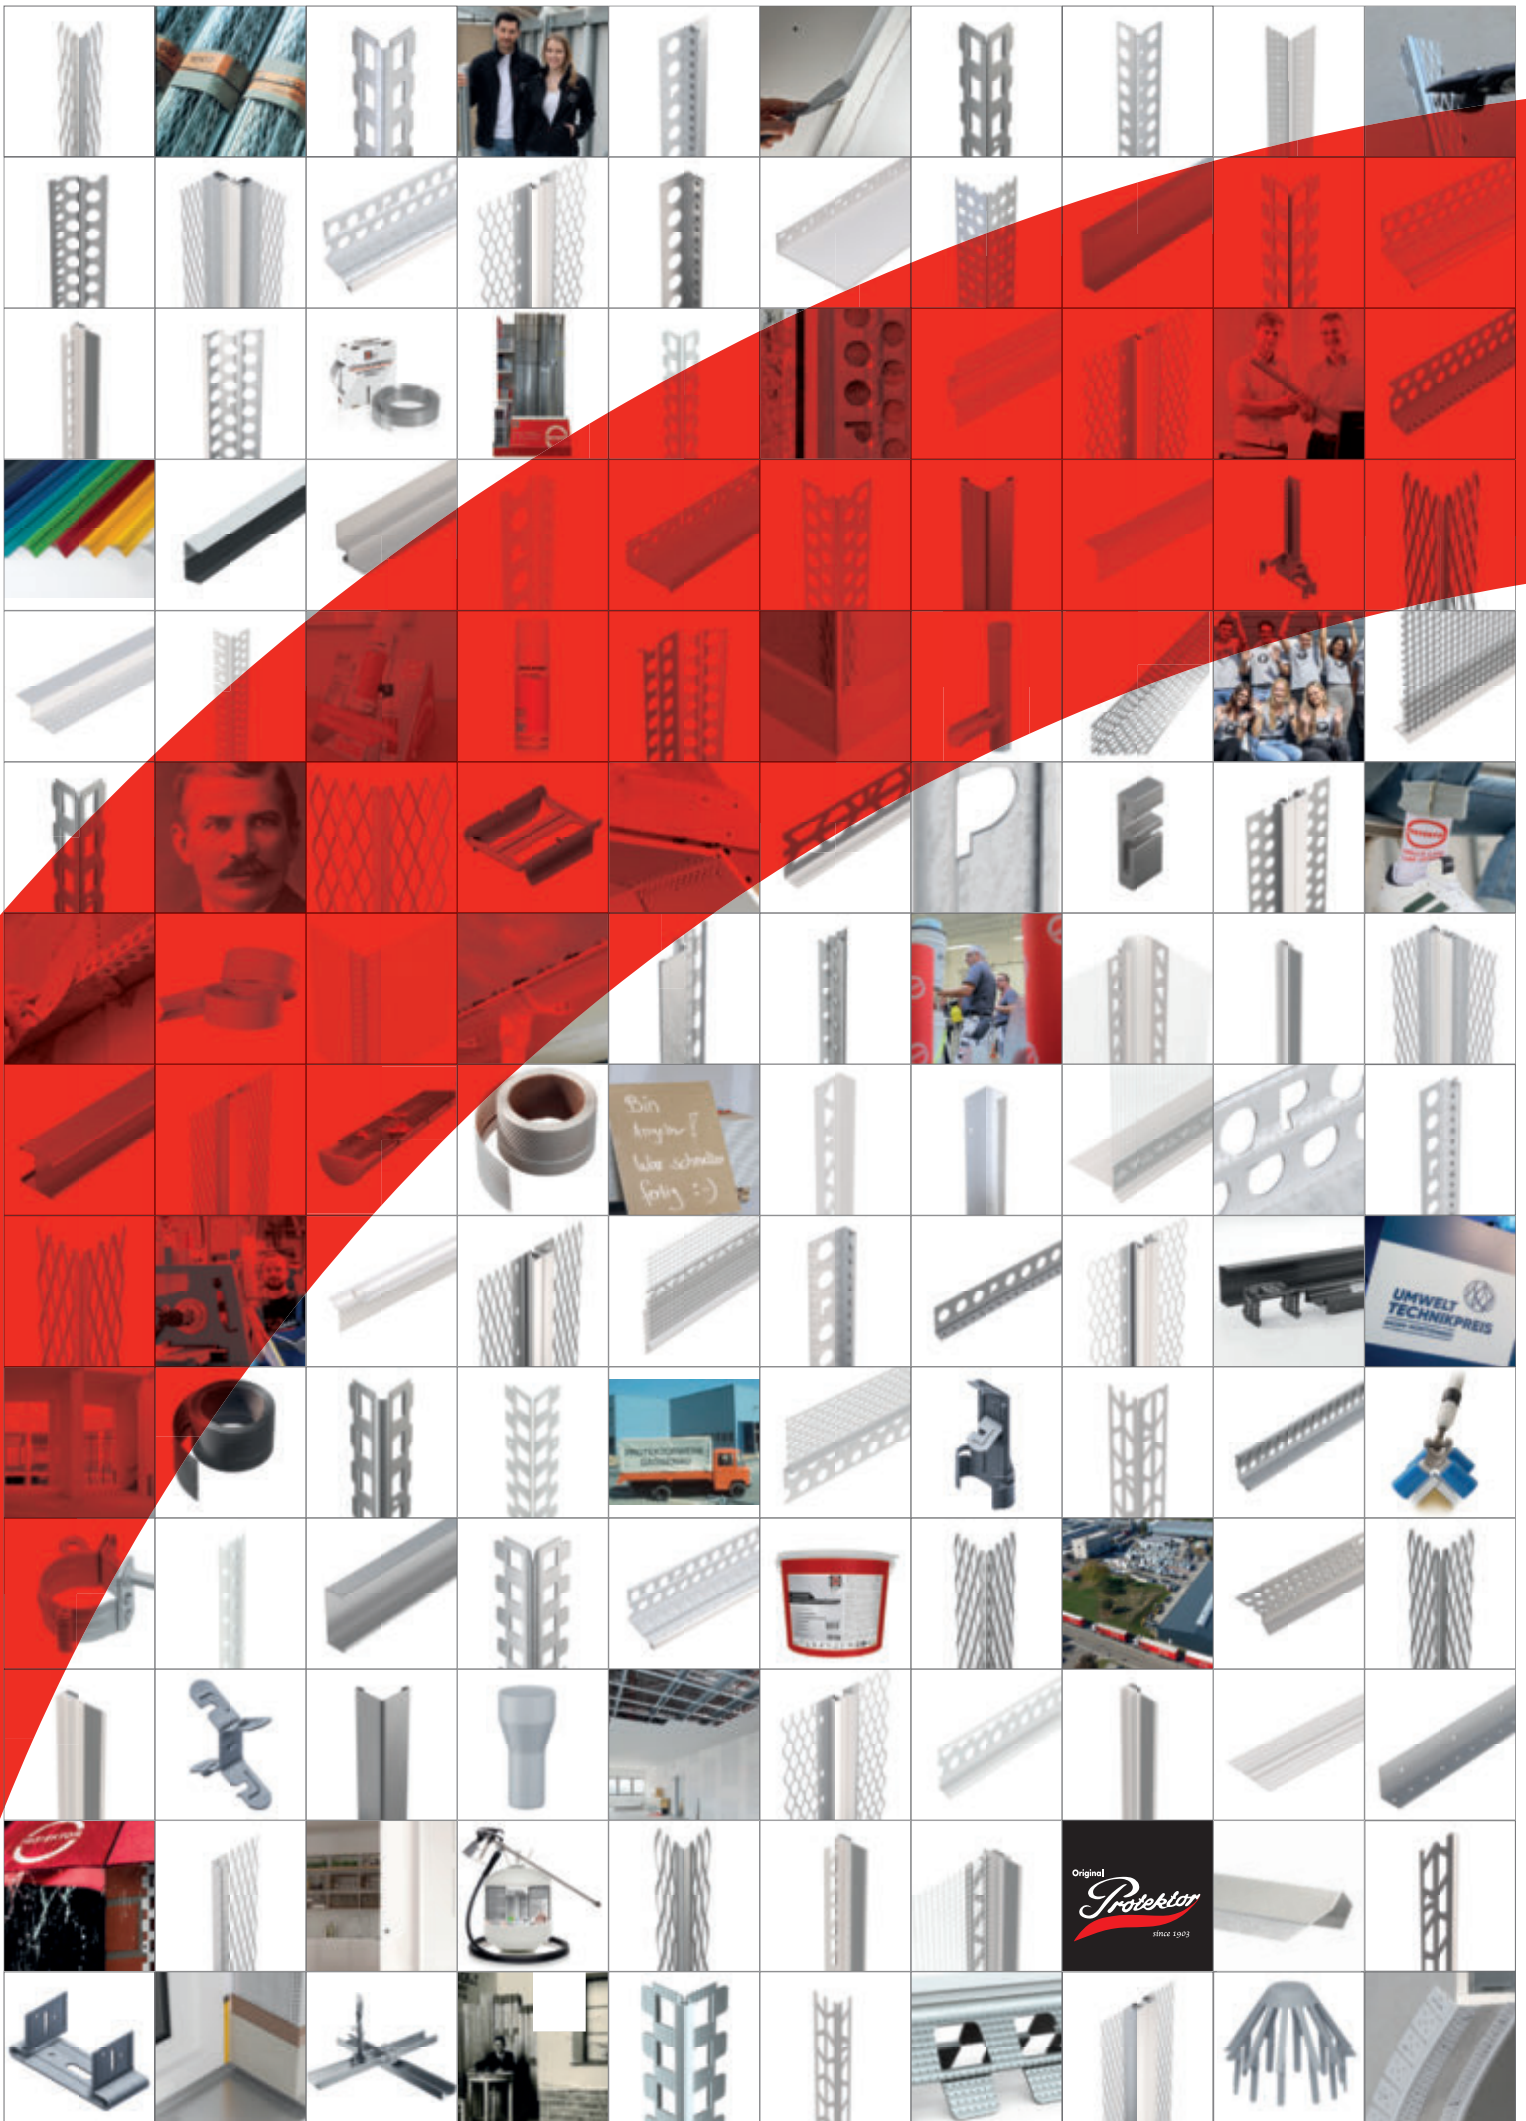



—— MARKET LEADER IN EUROPE

Over 3.000 products for modern building

Development and production: Made in Germany



PROTEKTOR | THE BEST SOLUTION



INDEX

INCREASING BY ARTICLE NUMBER

10...		1114	33	1265	93	1469	140	15277	94
1004	18	1116	367	1266	93	1472	139	15278	94
1005	20	1118	129	1283	93	1473	139	15279	94
1007	19	1120	127	1284	93	1474	139	15280	94
1007A	20	1121	127	1285	93	1477	139	15281	94
1007Z	19	1122	127	1286	93	1478	140	15282	94
1012Z	39	1123	127	1295	93	1479	140	15283	94
1013	40	1131	111	12111	28	1482	143	15284	94
1014	40	1132	111	12164	27	1492	95	15285	94
1015	18	1133	113	12349	112	1493	95	15286	94
1017	18	1134	113	12351	29	1494	95	15287	94
1018	18	1135	111	13...		14403	144	15288	94
1020	38	1136	114	1301	26	14423	144	15289	94
1022Z	21	1138	112	1304	118	14443	144	15290	94
1023	37	1156	49	1306	26	14463	145	17...	
1024Z	39	1159	51	1311	116	14911	98	1750	117
1026	18	1161	51	1312	26	14912	34	1751	118
1027	16	11055	25	1313	118	14913	35	1753	118
1028	40	11066	24	1314	116	14914	35	1765	44
1030	103	11311	111	1315	118	14915	35	17708	34
1031	105	11321	113	1316	116	14916	95	17709	34
1033	106	11511	49	1319	117	14917	96	17710	34
1039Z	40	11521	50	1321	29	14918	96	17711	34
1041	21	11531	50	1325	119	14919	96	18...	
1043Z	37	11541	49	1328	119	14920	99	1821	37
1044Z	21	11551	50	1371	117	14921	99	1824	37
1045Z	37	11571	49	1373	117	14922	99	20...	
1046	38	11581	51	1374	119	14923	100	2000	373
1051	19	11601	50	1375	119	14924	100	2001	373
1058	17	12...		1377	119	14925	100	2026	22
1061	38	1201Z	32	13131	116	14926	100	2027	23
1062	38	1206Z	31	13141	116	14927	101	2041	23
1063	93	1210	28	13191	117	14928	97	2066	23
1064	93	1211	28	14...		14940	101	2072	22
1065	93	1212A	29	1422	138	14941	101	2073	22
1066	93	1214	30	1423	137	14942	101	21...	
1078	103	1216	27	1424	138	14943	101	2130	84
1080	38	1216A	27	1425	138	14950	136	2132	84
1084	17	1218	29	1426	137	14951	136	2134	84
1085Z	37	1219	30	1427	138	14952	136	2135	58
1086	38	1220	29	1428	137	14953	136	2136	58
1087	16	1222	41	1429	137	14954	136	2151	88
1088	17	1223	41	1430	137	14955	136	2152	88
1089	24	1224	41	1432	35	14956	136	2154	80
1092	77	1225	42/47	1433	35	14957	136	2178	58
1096	78	1226	47	1434	35	14960	98	2180	58
1098	95	1227	42	1440	143	14961	98	2182	58
10077	20	1229	42/47	1441	143	14962	98	2184	60
10122	39	1230	29	1442	143	14963	98	22...	
10881	17	1231	28	1444	143	14964	98	2205	57
10882	22	1233	127	1445	143	15...		2206	57
10883	112	1234	111	1446	144	1500	141	2208	57
11...		1235	28	1447	144	15270	94	2209	54
1104	25	1236	27	1448	143	15271	94	2212	56
1105	25	1240	47	1449	143	15272	94	2215	53
1106	24	1241	41	1452	141/232	15273	94	2218	55
1108	24	1242	41	1458	67	15274	94	2225	60
1110	33	1263	93	1459	67	15275	94	2229	60
1113	33	1264	93	1468	140	15276	94	2230	61

INDEX

INCREASING BY ARTICLE NUMBER

2231	58	3537	263	3753	31	37324	131	37729	70
2232	58	3540	273	3754	31	37325	131	37734	124
2233	59	3546	266	3755	126	37326	134	37744	124
2236	88	3547	266	3756	83	37327	133	37806	72
2241	122	3548	266	3757	84	37328	134	37809	73
2251	54	3554	263	3758	125	37329	132	37814	120
2263	122	3555	243	3759	92	37331	132	37822	120
2274	53	3557	265	3760	92	37333	133	37824	120
2293	45	3558	266	3761	92	37334	134	37825	120
2295	45	3560	256	3762	160	37339	133	37827	120
2297	44	3561	256	3763	109	37340	132	37832	122
2299	44	3562	256	3765	161	37347	134	37834	120
27...		3563	252	3766	122	37348	134	37842	121
2765	44	3569	239	3767	109	37361	128	37844	121
2768	43	3575	244	3768	114	37362	128	37848	123
30...		3578	272	3769	115	37400	85	37862	114
30351	89	3588	254	3770	107	37401	85	37863	123
30352	89	3589	254	3776	108	37402	85	37864	115
30361	89	3590	243	3778	108	37404	85	37865	115
30362	89	36...		3780	107	37406	62	37906	72
32...		3609	253	3784	122	37408	62	37909	73
3226	125	3610	286	3785	115	37410	62	37914	79
33...		3611	286	3787	128	37414	62	37916	72
3310	268	3612	285	3788	121	37420	63	37921	63
3311	268	3613	286	3789	121	37422	63	37922	63
3312	268	3614	285	3790	107	37424	63	37923	63
3313	268	3617	286	3791	79	37428	46	37924	63
3314	268	3618	300	3793	79	37429	46	37925	63
3315	268	3623	239	3794	80	37430	63	37929	73
3316	268	3624	242	3796	79	37432	63	37941	80
3317	268	3655	161	3797	77	37434	63	37942	80
3322	270	3658	252	3799	77	37500	85	37945	80
3325	270	3662	300	37098	79	37501	85	37946	46
3326	270	3663	300	37103	68	37503	86	37964	87
3327	269	3674	240	37104	68	37507	125	37968	77
3331	269	3677	289	37111	68	37509	125	37969	77
3332	269	3678	289	37112	68	37520	87	37976	78
3333	269	3679	289	37127	81	37521	76	38...	
3334	269	3681	289	37128	81	37523	76	3820	254
3335	270	3682	289	37129	71	37524	76	3830	293
3336	270	3683	290	37154	91	37525	76	3832	293
35...		3685	289	37155	91	37526	76	3833	293
3501	243	3686	289	37156	69	37527	43	3834	294
3502	252	3687	301	37159	69	37530	85	3836	294
3503	244	3688	301	37169	108	37531	90	3840	109
3504	243	3691	251	37171	106	37532	89	3841	297
3505	247	37...		37172	108	37537	86	3842	297
3506	240	3711	71	37179	106	37538	86	3843	297
3518	273	3712	71	37207	81	37539	86	3844	297
3519	272	3726	69	37214	46	37540	89	3845	298
3520	272	3735	127	37300	84	37606	67	3846	297
3524	272	3738	127	37301	84	37609	69	3847	297
3525	273	3741	127	37302	84	37651	107	3848	297
3527	253	3744	128	37317	132	37706	67	38406	62
3528	272	3747	127	37318	133	37709	70	38408	62
3529	252	3749	81	37320	131	37716	71	38410	62
3534	262	3750	125	37321	135	37719	70	38414	62
3535	262	3751	106	37322	131	37720	70	38510	63
3536	263	3752	78	37323	131	37724	124	38514	63

INDEX

INCREASING BY ARTICLE NUMBER

38610	70	4615	209	5152	155	5552	181	58125	197
38613	70	4616	209	5156	160	5553	181	58126	197
38614	70	47...		5161	162/271	5555	181	58128	195
38807	74	4705	206	5162	162/271	5556	181	58129	196
38810	73	4710	206	5165	163/271	5570	162	58130	192
38814	73	4715	206	5167	149	5575	162	58148	193
39...		48...		5168	149	5580	162	58150	199
3906	367	4810	206	5170	159	56...		58159	195
3908	367	4815	206	5177	163/271	56300	204	58168	190
3914	367	4850	219	5178	159	56310	203	58203	199
3915	368	4851	219	5179	149	56311	203	58205	198
3916	369	4852	219	5186	163/271	56321	204	58206	198
3917	368	4859	221	5189	163/271	56322	204	58215	198
3923	369	4862	221	5194	163	56323	204	58216	198
3929	368	4863	221	5198	209	56324	204	58220	199
3940	369	4864	221	52...		56325	204	58221	200
39622	74	49...		5211	150	56326	204	58227	199
43...		4914	207	5215	150	56342	204	58236	198
4364	210	4918	207	5216	151	56344	204	58239	199
44...		4923	207	5224	151	56359	203	58241	198
4410	208	4929	207	5230	152	56367	203	58304	194
4415	208	50...		5233	152	56369	203	58310	195
4419	207	5007	203	5234	152	56393	203	58317	196
4420	208	5011	157	5236	160	57...		59...	
4427	208	5015	157	5237	160	57100	168	59011	191
4477	208	5016	157	5238	160	57101	168	59014	190
45...		5030	157	5239	160	57102	168	59015	191
4510	208	5033	157	5241	181	57230	167	59016	191
4515	208	5034	157	5244	148	57234	167	59019	193
4519	207	50198	149	5247	152	57235	167	59020	194
4520	208	50414	371	5248	152	57236	167	59021	194
4525	207	50416	371	5261	217	57237	167	59022	194
4529	207	50914	371	5262	217	57238	168	59023	194
4530	208	50916	371	5263	217	57260	164	59024	192
4534	221	51...		5272	182	57261	164	59030	192
4535	221	5100	202	5273	182	57265	164	59033	192
4536	219	5101	148	5274	182	58...		59034	192
4537	219	5104	202	53...		58102	190	59041	192
4538	219	5111	148	5313	202	58103	194	59047	192
4540	210	5112	160	53000	185	58104	194	59048	192
4541	210	5114	149	53110	185	58105	197	59182	198
4542	210	5116	147	53111	185	58106	196	59183	198
4543	210	5117	147	53168	159	58107	196	59185	197
4544	210	5118	147	53244	159	58108	195	59198	214
4548	211	5120	147	53400	185	58109	197	59211	193
4550	210	5121	148	54...		58110	197	59215	193
4551	210	5127	206	5450	159	58111	197	59216	193
4552	211	5128	148	5453	163	58112	197	59230	193
4553	211	5129	153	55...		58113	197	59233	193
4554	211	5130	153	5502	209	58114	197	59234	193
4558	211	5131	154	5503	209	58115	197	60...	
4591	213	5132	154	5512	155	58116	197	6004	174
4592	213	5138	208	5513	155	58117	197	6008	173
4593	214	5140	154	5514	155	58118	197	6009	173
4597	211	5141	151	5515	155	58119	197	6012	177
4599	214	5143	160	5516	155	58121	195	6013	177
46...		5149	155	5547	177	58122	190	6014	177
4610	209	5150	155	5549	181	58123	197	6015	176
4611	209	5151	155	5550	181	58124	197	6017	176

INDEX

INCREASING BY ARTICLE NUMBER

6018	177	6126	202	6432	232	6679	230	81100	317
6019	175	6127	202	6490	213	6680	230	81101	317
6020	175	6128	172	6491	214	6685	230	81102	320
6021	175	6129	204	65...		6686	230	81103	320
6022	175	6141	179	6518	228	6687	230	81104	320
6023	175	6144	161	6519	229	6690	229	81108	328
6024	175	6146	161	6522	226	6691	229	81111	319
6025	175	6148	161	6523	226	6696	229	81112	319
6026	175	6156	178	6524	226	6697	229	81113	317
6027	175	6157	172	6533	226	6698	230	81114	317
6028	175	6158	178	6534	227	67...		81115	327
6029	175	6159	171	6538	228	6727	164	81117	318
6031	175	6160	203	6539	229	6732	164	81118	328
6032	176	6161	172	6541	229	6733	164	81119	318
6034	173	6162	179	6542	227	6735	164	81122	318
6038	173	6166	171	6543	227	6736	164	81123	329
6040	174	6167	171	6544	228	6751	178	81126	329
6041	174	6169	171	6546	228	6752	178	81128	329
6042	174	6172	210	6547	227	6753	178	81129	329
6043	174	6182	178	6549	161	6754	178	81132	318
6044	174	6183	178	6558	212	6755	178	81134	327
6045	174	6184	210	6578	161	6756	178	81139	320
6046	174	6185	178	6580	213	6765	163	81141	319
6048	174	6186	211	6582	213	6766	163	81200	308
6050	174	6187	185	6585	213	6767	163	81202	310
6051	174	6188	185	6586	212	6768	163	81208	332
6052	174	6189	185	6587	212	6769	163	81209	310
6053	174	6190	178	6588	212	74...		81210	335
6054	174	6194	185	6589	212	7426	21	81211	309
6055	174	6195	185	6590	212	7476	54	81212	309
6056	174	6196	185	66...		7478	56	81215	335
6062	174	6197	185	6605	216	7483	56	81220	308
6063	174	6199	176	6606	216	75...		81227	336
6077	171	62...		6607	216	7501	31	81229	336
6078	170	6201	176	6608	216	7503	31	81234	335
6079	171	6202	187	6609	216	7521	32	81239	310
6090	170	6203	187	6610	216	7523	32	81250	326/363
6092	172	6228	187	6615	216	7541	31	81255	326/363
6096	172	6229	187	6616	216	7571	32	81314	339/343
60211	175	6234	213	6617	216	7573	32	81315	328/332
60212	175	6236	188	6618	216	80...		81316	339/343
60213	175	6237	188	6619	216	8058	109	81317	328/332
60214	175	6239	188	6620	216	8060	110	81318	328/332
60215	175	6242	187	6625	216	8068	126	81319	339/343
60216	175	6248	188	6626	216	81...		81321	351
60218	175	6260	187	6627	216	81000	304	81341	350
60219	175	63...		6628	216	81002	306	81418	329
60220	175	6300	173	6629	216	81008	306	81419	333
60225	175	6301	173	6630	216	81010	331	81500	312
60230	175	6302	173	6645	216	81011	305	81502	313
61...		64...		6646	216	81012	305	81508	339
6100	170	6400	223	6647	216	81015	331	81511	313
6102	170	6401	223	6655	217	81020	304	81512	313
6105	170	6402	223	6656	217	81025	340	81515	338
6110	172	6403	223	6657	217	81026	333	81516	338
6111	172	6427	232	6665	217	81027	333	81520	312
6116	171	6429	232	6666	217	81029	333	81527	340
6117	173	6430	232	6667	217	81034	332	81529	340
6118	173	6431	232	6670	162	81039	306	81532	325

INDEX
INCREASING BY ARTICLE NUMBER

81534	339	82317	309	83218	336	83632	322/346	84410	331
81710	334	82415	335	83219	341	83634	332	84415	331
81711	336	82417	309	83220	334	83636	334	84416	331
81712	341	82500	312	83221	341	83639	306	84417	309
81713	341	82512	313	83227	309	83640	334	84418	332
81714	344	82513	312	83308	339	83650	340	84426	333
81715	319	82514	312	83313	312	83708	333	84428	333
81800	315	82515	338	83314	312	83713	304	84432	322
81801	334	82516	338	83315	338	83714	304	84434	332
81802	316	82517	313	83321	351	83715	331	84439	306
81805	340	82518	339	83341	350	83716	331	84440	334
81806	341	82600	346	83400	321	83728	333	84441	334
81807	343	82603	346	83401	321	83816	335	84500	304
81808	343	82613	346	83402	323	83817	309	84501	304
81811	316	82615	338	83411	322	83916	338	84502	306
81812	316	82618	332	83412	322	84...		84503	306
81813	315	82620	346	83413	321	84000	345/361	84508	333
81814	315	82812	316	83414	321	84015	327	84511	305
81815	342	82816	342	83415	327	84017	309	84512	305
81820	315	82817	315	83416	327	84022	318	84513	304
81827	343	82818	342	83419	322	84029	329	84514	304
81830	336	82918	343	83422	321	84055	330	84517	305
81834	342	83...		83439	323	84100	317	84520	304
81840	340	83000	308	83500	317	84101	317	84600	312
81845	334	83001	308	83501	317	84102	319	84601	312
81880	330	83002	310	83502	319	84108	328	84602	313
81890	330	83009	310	83508	329	84110	327	84606	341
81900	327	83011	309	83511	319	84111	319	84608	339
81901	327	83012	309	83512	319	84112	319	84611	313
81902	331	83015	338	83513	317	84113	317	84612	313
81904	335	83016	338	83514	317	84114	317	84615	338
81906	338	83017	309	83515	327	84115	327	84616	338
81908	342	83018	339	83516	327	84116	327	84618	339
81910	339	83020	308	83517	318	84117	318	84620	312
81950	328	83024	338	83518	328	84118	328	84629	340
81951	328	83027	340	83519	318	84119	318	84634	339
82...		83029	340	83522	318	84123	329	84640	340
82000	304	83034	339	83523	329	84125	331	84706	338
82012	305	83039	310	83526	329	84126	329	84713	312
82013	304	83055	330	83528	329	84128	329	84714	312
82014	304	83100	312	83529	329	84132	318	84715	338
82015	331	83101	312	83532	318	84134	327	84716	338
82016	331	83102	313	83534	327	84139	320	84717	313
82017	305	83110	335	83539	320	84141	319	84720	341
82018	332	83111	313	83541	319	84180	330	84721	334
82028	333	83112	313	83580	330	84200	308	84815	331
82032	322	83115	335	83600	304	84201	308	84915	327
82115	327	83116	335	83601	304	84202	310	85...	
82118	328	83117	313	83602	306	84209	310	85415	334
82200	308	83118	336	83608	306	84211	309	85416	337/341
82212	310	83120	312	83610	331	84212	309	85516	349
82213	308	83129	336	83612	305	84220	308	85517	349
82214	308	83132	347	83615	331	84239	310	85518	306/310/348
82215	335	83134	335	83616	331	84308	329	85519	314/316/348
82216	335	83135	336	83617	305	84313	308	85520	307/311/348
82217	309	83150	341	83618	332	84314	308	85558	307/311/314/
82218	336	83213	308	83620	304	84318	332	85559	307/311/314/
82222	326/363	83214	308	83626	333	84400	345/361	85560	307/311/314/
82315	331	83215	335	83629	333	84402	331	85562	307/311/348

INDEX

INCREASING BY ARTICLE NUMBER

85684	357	85904	354	86139	306	86519	318	88605	304
85685	357	85905	357	86155	330	86522	318	88606	306
85686	357	85906	354	86200	308	86523	329	88607	305
85687	358	85907	354	86201	308	86526	329	88608	306
85688	358	85909	354	86202	310	86529	329	88609	332
85689	358	85910	354	86208	310	86532	318	88610	332
85690	358	85911	354	86211	309	86534	327	88611	317
85691	358	85912	357	86212	309	86535	330	88612	317
85692	358	85920	355	86213	308	86539	320	88615	318
85693	358	85930	357	86214	308	86541	319	88616	317
85694	358	85943	354	86215	327	86600	345/361	88617	317
85695	358	85944	355	86216	338	86601	345/361	88618	318
85696	358	85948	357	86217	309	86602	345/361	88619	320
85697	358	85954	354	86218	328	86603	345/361	88620	320
85698	358	85959	357	86220	308	86608	333	88621	319
85699	356	85960	357	86228	329	86616	331	88622	358
85700	356	85966	357	86232	322	86617	309	88623	358
85701	356	85970	354	86239	310	86621	351	88624	358
85702	356	85972	354	86300	312	86641	350	88625	357
85703	356	85974	354	86301	312	86708	332	88626	357
85704	356	85976	354	86302	313	86715	331	88627	357
85705	356	85978	354	86308	339	86716	331	88628	357
85706	356	85980	355	86310	341	86728	333	88639	306
85707	356	85984	360	86311	313	86816	327	90...	
85708	356	85985	360	86312	313	86915	338	9002	113
85709	356	85986	360	86313	312	86916	338	9003	57
85710	356	85987	360	86314	312	86935	341	9005	57
85711	356	85988	360	86315	338	88...		9007	20
85712	356	85989	360	86317	313	88000	321	9008	57
85831	354	86...		86318	339	88001	321	9011	80
85832	354	86000	324	86320	312	88002	323	9027	265
85834	354	86001	324	86329	340	88008	323	9040	287
85837	357	86002	325	86334	339	88011	322	9041	287
85839	357	86011	325	86335	340	88012	322	9042	259
85846	359	86012	325	86408	329	88013	321	9043	283
85847	359	86013	324	86410	350	88014	321	9044	283
85848	359	86014	324	86412	350	88019	322	9046	284
85849	359	86016	331	86414	350	88022	321	9047	261
85850	359	86017	325	86416	350	88039	323	9048	261
85851	359	86019	324	86418	351	88560	331	9049	261
85852	360	86022	324	86420	351	88561	331	9053	259
85853	360	86100	304	86422	351	88562	332	9054	259
85854	360	86101	304	86424	352	88563	329	9056	300
85855	360	86102	306	86426	352	88564	322	9059	300
85856	357	86108	306	86428	352	88565	327	9061	261
85859	354	86110	334	86429	352	88566	327	9062	261
85864	354	86111	305	86430	352	88567	327	9063	301
85866	361	86112	305	86500	317	88568	318	9071	283
85869	355	86113	304	86501	317	88569	327	9072	283
85873	357	86114	304	86502	319	88570	331	9073	284
85889	356	86115	331	86504	320	88571	333	9074	16
85890	356	86117	305	86511	319	88572	327	9075	77
85891	356	86118	332	86512	319	88573	331	9078	104
85892	356	86120	304	86513	317	88574	331	9079	104
85893	356	86124	331	86514	317	88575	331	9080	237
85894	356	86126	333	86515	327	88600	304	9081	256
85901	354	86129	333	86516	327	88601	304	9083	254/282
85902	354	86134	332	86517	318	88603	304	9085	250
85903	357	86135	334	86518	328	88604	304	9086	261

INDEX
INCREASING BY ARTICLE NUMBER

9087	262	91014	83	9341	288	9599	112
9088	262	91015	83	9342	288	95631	83
9089	262	91016	83	9344	288	95632	83
9090	250	91018	83	9345	288	95633	83
9092	261	91020	83	9346	288	96...	
9095	287	91022	83	9348	288	9603	291
9096	287	91051	54	9349	288	9604	291
90527	43	91081	55	9350	288	9605	291
90535	43	92...		9361	375	9606	291
90602	82	9224	79	9363	275	9607	291
90603	82	9229	60	9385	301/351	9608	292
90604	82	9272	114	93304	79	9609	292
90605	82	9278	105	93305	79	9610	292
90606	82	9293	48	93306	79	9612	292
90607	82	9294	48	93308	79	9613	291
90608	82	9295	48	93310	79	9615	291
90609	82	9297	113	93312	79	9617	291
90610	82	9298	111	93314	79	9619	292
90616	82	9299	112	93316	79	9626	295
90804	82	92118	129	94...		9627	295
90805	82	92122	130	9402	238	9628	295
90806	82	92123	130	9407	251	9629	295
90808	82	92124	130	9408	251	9630	295
90810	82	92125	129	9409	251	9632	296
90811	82	92126	129	9421	376	9640	296
90812	82	92322	87	9423	375	9641	296
90814	82	92324	87	9424	375	9642	296
90816	82	92326	87	9428	239	9644	296
90818	82	92328	87	9430	238	9645	296
90820	82	92330	87	9431	238	9646	296
90881	16	92422	76/87	9432	247	9648	296
91...		92424	76/87	9435	271	9649	296
9100	53	92426	76/87	9436	271	9650	296
9104	53	92428	76/87	9437	271	9695	292
9110	59	92430	76/87	9438	239	9697	293
9111	59	93...		9439	239	9699	293
9112	55	9300	283	9440	237	97...	
9113	56	9301	283	9441	237	9736	265
9114	92	9302	284	9442	237	9738	265
9115	92	9303	284	9443	237	9779	104
9116	92	9306	284	9444	242	97018	237
9121	84	9309	283	9445	242	97043	250
9122	84	9311	265	9446	242		
9123	58	9312	285	9447	242		
9124	84	9313	285	9449	242		
9125	60	9314	285	9450	250		
9130	375	9320	287	9451	250		
9134	55	9321	287	9460	237		
9135	28	9322	287	9461	237		
9136	27	9323	287	9471	282		
9139	375	9324	287	9472	282		
9141	83	9325	287	9484	238		
9172	105	9330	283	9485	238		
9179	105	9331	283	9486	247		
9181	88	9332	284	9487	251		
9182	88	9333	284	95...			
91010	83	9334	282/284	9540	88		
91012	83	9335	282/284	9571	55		
91013	83	9340	288	9579	104		

OVERVIEW OF ICONS

EXPLANATION OF ICONS



Aluminium profiles with white primer coating for lasting protection.



Galvanised steel profile with increased zinc coating.



Stainless steel profiles.




Profiles with surface embossing for improved plaster adhesion.



Powder coating according to RAL possible against surcharge. Coating page see data sheet on the Internet. Exclusion of liability for stainless steel profiles.



Suitable for fixing in interior fittings with profile adhesive.



Plastering and plaster sealing strips that have been tested and certified by the ift. The current test reports are available for download at www.protektor.de.



Tested air, wind and driving rain tightness. The current test reports are available for download at www.protektor.de.



For damp rooms with water exposure class up to W2-I.



For damp rooms with water exposure class up to W3-I.



Filler profiles fulfil the specifications of the VOB (German Construction Contract Procedures).



Movement according to VDPM data sheet / SAF guideline Class A
Movement according to ÖNORM B6400 / ÖAP-VAR VII Class III
The current test reports are available for download at www.protektor.de.

PROFILE SELECTION BY MORTAR TYPE



The following table gives the correct combinations of plaster profile and plaster mortar:

Mortar/plaster	Profile material for exterior use					Profile material for interior use (excluding damp areas and domestic bathrooms)				
	galvanised	alvanised with coating	galvanised with PVC edge	aluminium	stainless steel	galvanised	alvanised with coating	galvanised with PVC edge	aluminium	stainless steel
Gypsum mortar and mortars containing gypsum	⊘	⊘	⊘	⊘	⊘	✓	✓	✓	✓	✓
Lime plaster	✓	✓	✓	✓ ²	✓	✓	✓	✓	✓ ²	✓
Lime cement plaster	✓	✓	✓	✓ ²	✓	✓	✓	✓	✓ ²	✓
Cement plaster	✓	✓	✓	✓ ²	✓	✓	✓	✓	✓ ²	✓
Silicate plaster	✗ ¹	✓	✓	✓ ²	✓	✗ ¹	✓	✓	✓ ²	✓
Silicone resin plaster	✗ ¹	✓	✓	✓	✓	✗ ¹	✓	✓	✓	✓
Synthetic resin plaster	✗ ¹	✓	✓	✓	✓	✗ ¹	✓	✓	✓	✓
One-coat plaster (single layer)	✗	✓	✓	✓ ²	✓	✓	✓	✓	✓ ²	✓
Insulating plaster	✓	✓	✓	⊘	✓	✓	✓	✓	✓	✓
Renovating plaster	✗	✗	✗	✗	✓	✗	✗	✗	✗	✓
Clay plasters	⊘	⊘	⊘	⊘	⊘	✗	✓	✗	✓ ²	✓
Reinforcement plaster organic	✗	✓	✗	✓	✓	✗	✓	✗	✓	✓
Reinforcement plaster mineral	✓	✓	✓	✓ ²	✓	✓	✓	✓	✓ ²	✓
Adhesive plaster	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Caption	¹⁾ In the case of synthetic resin, silicone resin or silicate finishing plasters/top coats on mineral substrates, incorporated galvanised profiles are to be protected additionally with a quartz filled, organically bound plaster primer (not thinned). ²⁾ Aluminium with base coat.									
	✓ permitted	✗ not permitted				⊘ not suitable				

COMMENTS

Please read the product information and the additional information at the different drawings.

- Galvanised profiles should not come into contact with aluminium and stainless steel profiles.
- For interior plaster profiles, the profile edge should remain visible or be covered, depending on the specification (single-layer or two-layer plaster).
- All exterior plaster profiles without PVC edge must be completely covered with plaster so that the profile edge is no longer visible. The covering must be at least the grain thickness of the finishing plaster (preferably at least 3 mm).

- Galvanised profiles with a smooth PVC edge must not be plastered over. After plastering, the PVC edge must be cleaned immediately.
- Galvanised profiles with a rough surface edge may be plastered over.
- For expansion joints, the joint area must remain open and free of mortar/plaster.
- In the case of galvanised profiles with coating, ensure that the coating is not damaged.
- Observe the leaflets „Planning and application of metallic plaster profiles in exterior and interior areas“ (www.euro-profiles.com) and „Plaster and dry construction in damp rooms“ (www.zdb.de).



GENERAL INFORMATION

- Various plaster profiles made of galvanized steel, aluminum with coating, stainless steel, plastic or material combinations are used for internal plastering.
- Only special profiles may be used for plasters in Wet rooms (see chapter on Wet rooms).
- When using pasty finishing plasters (silicate/silicone resin/dispersion plasters), preferably use profiles made of white aluminum or stainless steel. When using galvanized profiles, protect them additionally with a quartz-filled, organically bound plaster primer (undiluted).
- Galvanized profiles with the marking „Z“ are equipped with increased zinc coating for increased corrosion protection and increased safety.
- Cut metal profiles with hand shears. Never cut galvanized profiles with a cutting disc. Process stainless steel profiles only with stainless steel tools and cut them with a cutting disc recommended for stainless steel. Cut PVC profiles to the required installation dimension using suitable PVC shears (e.g. Protektor profile shears).
- Remove any nails used for pre-fixing before plastering.
- Attach the profiles with suitable mortar or with the plaster mortar to be used and align them flush and plumb.
- The heads of the plastering gauges must not protrude; re-smoothing may be necessary.
- For internal plaster profiles, the profile edge should remain visible or be covered, depending on the specification (single-layer or two-layer plaster).
- Clean flush metal parts, e.g. profile heads and PVC parts immediately after plastering.
- Ensure good ventilation after plastering.
- Store all profiles in a dry place! Additionally, store PVC profiles in a cool and frost-free place, horizontally and lying flat.

All standards and guidelines on the subject of plastering must be observed in their current version, in particular the following leaflet:

- Leaflet for the planning and application of metallic plaster profiles in external and internal areas from the European Association of Plaster Profile Manufacturers.

The product information as well as the additional information with the respective product illustrations in this catalogue and the further notes in our product data sheets and processing instructions on our homepage must be observed!

For the selection of metallic plaster profiles, please refer to the table for profile selection according to mortar types, for the selection of plastering strips and plastering sealing strips, please refer to the corresponding selection tables according to movement classes and areas of application in this catalogue, as well as the complete instructions for the selection, processing and installation of our plastering strips and plastering sealing strips on our homepage.




CORNER PROFILES

Corner bead for interior plaster

Aluminium corner profile for filler and thin-layer plaster of 3 mm and thicker in interior areas.

Stainless steel version: 2274


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9074	3 mm	250	107593	Aluminum natural	25 PCS / 250 BUN
	3 mm	300	107595	Aluminum natural	25 PCS / 250 BUN



Corner bead for interior plaster

Aluminium corner profile for thin-layer plaster of 5 mm and thicker for interior areas. Use profiles in accordance with data sheet Planning and Application of Metallic Plaster Profiles.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
90881	5 mm	220	112228	Aluminum natural	25 PCS / 120 BUN
	5 mm	260	112229	Aluminum natural	25 PCS / 120 BUN
	5 mm	300	112230	Aluminum natural	25 PCS / 120 BUN



Corner bead for interior plaster

Galvanised steel corner profile for filler and thin-layer plaster of 3 mm and thicker in interior areas.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1087	3 mm	250	109153	Galvanised steel	50 PCS / 47 BOX
	3 mm	250	119775	Galvanised steel	50 PCS / 47 BOX
	3 mm	300	119776	Galvanised steel	47 PCS / 47 BOX



Corner bead for interior plaster

Edge profile made of galvanized steel for filler and thin-layer plasters from 3 mm for interior plastering.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1027	3 mm	260	119771	Galvanised steel	50 PCS / 100 BOX
	3 mm	300	119774	Galvanised steel	50 PCS / 100 BOX



Corner bead for interior plaster

Edge profile made of sheet steel with aluminum zinc coating for interior or thin layer plaster from 5 mm.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1088	5 mm	200	108510	Steel, aluzinc	25 PCS / 120 BUN
	5 mm	220	108532	Steel, aluzinc	25 PCS / 120 BUN
	5 mm	250	108270	Steel, aluzinc	25 PCS / 120 BUN
	5 mm	260	108243	Steel, aluzinc	25 PCS / 120 BUN
	5 mm	270	108533	Steel, aluzinc	25 PCS / 120 BUN
	5 mm	280	115168	Steel, aluzinc	25 PCS / 120 BUN
	5 mm	300	108244	Steel, aluzinc	25 PCS / 120 BUN



Corner bead for interior plaster

Corner profile made of aluzinved Steel, for thin-layer plaster of 5 mm and thicker for interior areas. Use profiles in accordance with data sheet planning and application of metallic plaster profiles.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
10881	5 mm	200	114934	Steel, aluzinc	25 PCS / 100 BUN
	5 mm	220	114938	Steel, aluzinc	25 PCS / 100 BUN
	5 mm	250	114939	Steel, aluzinc	25 PCS / 100 BUN
	5 mm	260	114940	Steel, aluzinc	25 PCS / 100 BUN
	5 mm	270	114941	Steel, aluzinc	25 PCS / 100 BUN
	5 mm	280	114942	Steel, aluzinc	25 PCS / 100 BUN
	5 mm	300	114943	Steel, aluzinc	25 PCS / 100 BUN




Corner bead for interior plaster

Corner profile made of galvanised steel, for thin-layer plaster of 6 mm and thicker in interior areas.

Aluminium version : 9104


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1084	6 mm	250	100789	Galvanised steel	25 PCS / 77 BUN



Corner bead for the switchover from to dry lining

Corner profile made of galvanised steel for transitions from drywall of 2 mm and thicker to plaster of 8 mm and thicker.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1058	8 / 2 mm	260	108993	Galvanised steel	15 PCS / 132 BUN




CORNER PROFILES

Corner bead for interior plaster

Corner profile made of galvanised steel for interior plaster of 8 mm and thicker.

Aluminium version : 9100

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1026	8 mm	250	100095	Galvanised steel	25 PCS / 66 BUN
	8 mm	300	102472	Galvanised steel	25 PCS / 66 BUN
1018	10 mm	200	100045	Galvanised steel	25 PCS / 66 BUN
	10 mm	225	100052	Galvanised steel	25 PCS / 66 BUN
	10 mm	250	100054	Galvanised steel	25 PCS / 66 BUN
	10 mm	260	103058	Galvanised steel	25 PCS / 66 BUN
	10 mm	275	100056	Galvanised steel	25 PCS / 66 BUN
	10 mm	300	100061	Galvanised steel	25 PCS / 66 BUN
	10 mm	300	100061	Galvanised steel	25 PCS / 66 BUN



Corner bead for interior plaster

Corner profile made of galvanised steel for interior plaster of 8 mm and thicker.


Rounding off radius: 4,75 mm

Stainless steel version: 2215

Notes:

Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1015	8 mm	240	100555	Galvanised steel	25 PCS / 66 BUN
	8 mm	250	100563	Galvanised steel	25 PCS / 66 BUN
	8 mm	300	100568	Galvanised steel	25 PCS / 66 BUN



Corner bead for interior plaster

Corner profile made of galvanised steel for interior plaster of 8 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1017	8 mm	200	100587	Galvanised steel	25 PCS / 66 BUN
	8 mm	225	100604	Galvanised steel	25 PCS / 66 BUN
	8 mm	250	100614	Galvanised steel	25 PCS / 66 BUN
	8 mm	260	100616	Galvanised steel	25 PCS / 66 BUN
	8 mm	270	100617	Galvanised steel	25 PCS / 66 BUN
	8 mm	300	102964	Galvanised steel	25 PCS / 66 BUN



Inside corner bead for interior plaster

Corner profile made of galvanised steel for inside corners and interior plaster of 8 mm and thicker.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1004	8 mm	260	109646	Galvanised steel	25 PCS / 132 BUN



Corner bead for interior plaster

Corner profile made of galvanised steel for various interior plaster thicknesses. In the reveal area additionally for different plaster thicknesses variable applicable.

Aluminium version : 91051
Stainless steel version: 2251

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1051	9 mm	250	100595	Galvanised steel	15 PCS / 100 BUN
	9 mm	300	103569	Galvanised steel	15 PCS / 88 BUN




Corner bead for interior plaster

Corner profile made of galvanised steel with thicker zinc coating for increased protection against corrosion, for interior plaster of 10 mm and thicker.

Aluminium version : 9007



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1007Z	10 mm	200	106131	Galvanised steel	25 PCS / 80 BUN
	10 mm	225	106125	Galvanised steel	25 PCS / 80 BUN
	10 mm	250	105921	Galvanised steel	25 PCS / 81 BUN
	10 mm	260	105920	Galvanised steel	25 PCS / 81 BUN
	10 mm	275	106025	Galvanised steel	25 PCS / 81 BUN
	10 mm	300	105922	Galvanised steel	25 PCS / 81 BUN




Corner bead for interior plaster

Corner profile made of galvanised steel for internal corners for interior plaster from 10 mm.

Aluminium version : 9007

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1007	10 mm	150	100000	Galvanised steel	25 PCS / 80 BUN
	10 mm	160	100094	Galvanised steel	25 PCS / 80 BUN
	10 mm	180	100096	Galvanised steel	25 PCS / 80 BUN
	10 mm	200	100383	Galvanised steel	25 PCS / 80 BUN
	10 mm	220	100399	Galvanised steel	25 PCS / 80 BUN
	10 mm	225	100403	Galvanised steel	25 PCS / 80 BUN
	10 mm	250	100092	Galvanised steel	25 PCS / 81 BUN
	10 mm	260	100414	Galvanised steel	25 PCS / 81 BUN
	10 mm	270	100425	Galvanised steel	25 PCS / 81 BUN
	10 mm	275	100429	Galvanised steel	25 PCS / 81 BUN
	10 mm	280	103101	Galvanised steel	25 PCS / 81 BUN
	10 mm	300	100437	Galvanised steel	25 PCS / 81 BUN




CORNER PROFILES

Corner bead for interior plaster

Corner profile made of galvanised steel for interior plaster of 10 mm and thicker. **Aluminium version : 9007**


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
10077	10 mm	150	106478	Galvanised steel	25 PCS / 80 BUN
	10 mm	160	115179	Galvanised steel	25 PCS / 80 BUN
	10 mm	200	107991	Galvanised steel	25 PCS / 80 BUN
	10 mm	220	106513	Galvanised steel	25 PCS / 80 BUN
	10 mm	225	114633	Galvanised steel	25 PCS / 80 BUN
	10 mm	250	107038	Galvanised steel	25 PCS / 81 BUN
	10 mm	260	106477	Galvanised steel	25 PCS / 81 BUN
	10 mm	270	107945	Galvanised steel	25 PCS / 81 BUN
	10 mm	275	106480	Galvanised steel	25 PCS / 81 BUN
	10 mm	280	107965	Galvanised steel	25 PCS / 81 BUN
	10 mm	300	106514	Galvanised steel	25 PCS / 81 BUN



Corner bead for interior plaster

Corner bead made of aluzinc steel for interior plaster of 10 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1007A	10 mm	260	108297	Steel, aluzinc	25 PCS / 81 BUN
	10 mm	300	108298	Steel, aluzinc	25 PCS / 81 BUN



Corner bead for interior plaster

Aluminium corner profile for interior plasters of 10 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9007	10 mm	260	108400	Aluminum natural	25 PCS / 81 BUN
	10 mm	275	108290	Aluminum natural	25 PCS / 81 BUN
	10 mm	300	108291	Aluminum natural	25 PCS / 81 BUN



Corner bead for interior plaster

Corner profile made of galvanised steel for internal corners for interior plaster from 10 mm.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1005	10 mm	250	100043	Galvanised steel	25 PCS / 81 BUN
	10 mm	260	102763	Galvanised steel	25 PCS / 81 BUN
	10 mm	300	100070	Galvanised steel	25 PCS / 81 BUN



Corner bead 135° for interior plaster and exterior render

Galvanized steel edge profile with increased zinc coating for increased corrosion protection for interior and exterior plaster from 10 mm.

Angular position: 135




SALE

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1044Z	10 mm	250	100540	Galvanised steel	15 PCS / 42 BUN

Corner bead for interior plaster and exterior render

Corner profile made of galvanised steel with thicker zinc coating for increased protection against corrosion, for interior and exterior plaster of 10 mm and thicker.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1022Z	10 mm	250	117723	Galvanised steel	15 PCS / 56 BUN
	10 mm	300	117724	Galvanised steel	15 PCS / 56 BUN

Corner bead for interior plaster and exterior render

Corner profile made of galvanised steel with notched wall flanges and PVC coating for creating rounded arches on interior and exterior plaster of 12 mm and thicker.

Colour: 10 - white
Rounding off radius: 4 mm

Notes:
Smallest possible radius 50 cm. Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1041	12 mm	250	100486	Galvanised steel, with PVC coating	15 PCS / 35 BOX

Corner bead for interior plaster

Corner protection beads made of galvanised steel for interior plaster of 20 mm and thicker.

Rounding off radius: 2,5 mm
Stainless steel version: 7483

Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7426	20 mm	300	102491	Galvanised steel	25 PCS / 72 BOX

CORNER PROFILES

Corner bead for interior plaster

Corner profile made of aluzinc steel, for surface plaster in interior areas, sharp-tipped head. Use profiles in accordance with data sheet 'Planning and application of metallic plaster profiles'.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
10882	2 mm	275	115335	Steel, aluzinc	60 PCS / 30 BOX
	2 mm	305	119695	Steel, aluzinc	60 PCS / 25 BOX



Sliding anchor small

Galvanised steel sliding anchor for attaching corner protection beads.

Suitable for product: 2026

Notes:

Fixing by setting in concrete or screwing on.
Requirement: 2 pieces/metre.

Item number	Order number	Material	Package/ Large pack
2072	101211	Galvanised steel	20 PCE / 87 BOX



Sliding anchor large

Galvanised steel sliding anchor for attaching corner protection beads.

Suitable for product: 2027

Notes:

Fixing by setting in concrete or screwing on.
Requirement: 2 pieces/metre.

Item number	Order number	Material	Package/ Large pack
2073	101225	Galvanised steel	20 PCE / 87 BOX



Corner protection profile

Stainless steel corner protection beads protect corners in high-trafficked rooms and can be attached mechanically. Matt surface. Plaster thickness with anchor = 16 mm.

Rounding off radius: 4 mm


Suitable for product: 2072

Notes:

Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2026	16 mm	200	101159	Stainless steel	15 PCS / 175 BUN
	16 mm	250	101161	Stainless steel	15 PCS / 175 BUN
	16 mm	300	101164	Stainless steel	15 PCS / 175 BUN




SALE

Corner protection profile

Stainless steel corner protection beads protect corners in high-trafficked rooms and can be attached mechanically. Matt surface. Plaster thickness with anchor = 21 mm.

Rounding off radius: 10 mm
Suitable for product: 2073
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2027	21 mm	200	101172	Stainless steel	6 PCS / 100 BUN
	21 mm	250	101175	Stainless steel	6 PCS / 100 BUN
	21 mm	300	101179	Stainless steel	6 PCS / 100 BUN

SALE

Corner protection profile

Stainless steel corner protection beads protect corners in high-trafficked rooms and can be glued on at any time. Polished surface, 320 grit.

Rounding off radius: 3,5 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2066		250	101221	Stainless steel	6 PCS / 63 BUN

Corner protection profile

Stainless steel corner protection beads protect corners in high-trafficked rooms and can be glued on at any time. Brushed surface, 320 grit.

Rounding off radius: 3,5 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2041		200	101194	Stainless steel	6 PCS / 150 BUN
		250	101201	Stainless steel	6 PCS / 150 BUN

FLATNESS GUIDES

Depth gauge profile for interior plaster

Plastering gauge made of galvanized steel with increased zinc coating for interior plaster from 6 mm.

Aluminium version : 9003
Stainless steel version: 2206



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1106	6 mm	250	111969	Galvanised steel	50 PCS / 80 BUN
	6 mm	260	111970	Galvanised steel	50 PCS / 80 BUN
	6 mm	275	111971	Galvanised steel	50 PCS / 70 BUN
	6 mm	300	111972	Galvanised steel	50 PCS / 70 BUN



Depth gauge profile for interior plaster

Depth gauge profile made of galvanised steel for interior plaster of 6 mm and thicker.

Processing instructions:
In damp rooms, stainless steel profiles are generally to be installed. The exception is domestic kitchens and bathrooms. Galvanized profiles must be removed after completion of the flush.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11066	6 mm	250	119116	Galvanised steel	50 PCS / 80 BUN
	6 mm	260	119117	Galvanised steel	50 PCS / 80 BUN
	6 mm	275	119118	Galvanised steel	50 PCS / 70 BUN
	6 mm	300	119119	Galvanised steel	50 PCS / 70 BUN




Depth gauge profile for interior plaster

Depth gauge profile made of aluzincd steel for interior plaster of 6 mm and thicker.

Material thickness (mm): 0,5 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1089	6 mm	260	111930	Steel, aluzinc	50 PCS / 80 BUN
	6 mm	300	115326	Steel, aluzinc	43 PCS / 80 BUN



Depth gauge profile for interior plaster

Depth gauge profile made of galvanised steel for interior plaster of 8 mm and thicker.

Aluminium version : 9008
Stainless steel version: 2208

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1108	8 mm	250	111995	Galvanised steel	50 PCS / 100 BUN
	8 mm	260	111996	Galvanised steel	50 PCS / 90 BUN
	8 mm	275	111998	Galvanised steel	50 PCS / 90 BUN
	8 mm	300	111999	Galvanised steel	50 PCS / 80 BUN



Depth gauge profile for interior plaster

Depth gauge profile made of galvanised steel with increased zinc coating for interior plaster of 10 mm and thicker.

Aluminium version : 9005
Stainless steel version: 2205



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1105	10 mm	250	111965	Galvanised steel	50 PCS / 64 BUN
	10 mm	260	111966	Galvanised steel	50 PCS / 64 BUN
	10 mm	275	111967	Galvanised steel	50 PCS / 56 BUN
	10 mm	300	111968	Galvanised steel	50 PCS / 56 BUN



Depth gauge profile for interior plaster

Depth gauge profile made of galvanised steel for interior plaster of 10 mm and thicker.

Processing instructions:
In damp rooms, stainless steel profiles are generally to be installed. The exception is domestic kitchens and bathrooms. Galvanized profiles must be removed after completion of the flush.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11055	10 mm	250	119110	Galvanised steel	50 PCS / 64 BUN
	10 mm	260	119111	Galvanised steel	50 PCS / 64 BUN
	10 mm	275	119112	Galvanised steel	50 PCS / 56 BUN
	10 mm	300	119113	Galvanised steel	50 PCS / 56 BUN



Depth gauge profile for interior plaster

Depth gauge profile made of galvanised steel for interior plaster of 12 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1104	12 mm	250	111992	Galvanised steel	50 PCS / 56 BUN



SHADOW JOINT PROFILES

Connecting profile for interior plaster


Shadow joint profile made of galvanised steel for interior plaster of 10 mm and thicker. **Shadow gap: 15 mm**
Stainless steel version: 2241



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1312	10 mm	250	115992	Galvanised steel	15 PCS / 47 BOX
	10 mm	300	115993	Galvanised steel	15 PCS / 47 BOX

Connecting profile for interior plaster


Shadow joint profile made of galvanised steel for interior plaster of 10 mm and thicker. **Shadow gap: 20 mm**



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1306	10 mm	250	115990	Galvanised steel	15 PCS / 47 BOX
	10 mm	300	115991	Galvanised steel	15 PCS / 47 BOX

Connecting profile for interior plaster

Shadow joint profile made of galvanised steel for interior plaster of 14 mm and thicker. **Shadow gap: 20 mm**
Stainless steel version: 2263



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1301	14 mm	250	115988	Galvanised steel	15 PCS / 47 BOX
	14 mm	300	115989	Galvanised steel	150 PCS / 47 BOX

Stop profile for interior plaster

Plaster stop profile made of galvanised steel for interior plaster of 3 mm and thicker.

Aluminium version : 9136
Stainless steel version: 2136

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1236	3 mm	250	115636	Galvanised steel	25 PCS / 180 BUN
	3 mm	260	115634	Galvanised steel	25 PCS / 180 BUN
	3 mm	300	115635	Galvanised steel	25 PCS / 150 BUN



Stop profile for interior plaster

Aluminium plaster stop profile for interior plasters of 3 mm and thicker

Stainless steel version: 2136

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9136	3 mm	250	101938	Aluminum natural	25 PCS / 144 BUN
	3 mm	300	108708	Aluminum natural	25 PCS / 144 BUN



Stop profile for interior plaster

Plaster stop profile made of galvanized steel for interior plaster of 6 mm and thicker.

Aluminium version : 9123
Stainless steel version: 2135

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1216	6 mm	250	115628	Galvanised steel	25 PCS / 180 BUN
	6 mm	260	115626	Galvanised steel	25 PCS / 180 BUN
	6 mm	270	115950	Galvanised steel	25 PCS / 180 BUN
	6 mm	300	115627	Galvanised steel	25 PCS / 150 BUN


SALE



Stop profile for interior plaster

Plaster stop profile made of galvanized steel for interior plaster of 6 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
12164	6 mm	260	118641	Steel, aluzinc	25 PCS / 100 BUN
	6 mm	300	118642	Steel, aluzinc	25 PCS / 100 BUN



Stop profile for interior plaster

Plaster stop profile made of aluzinc steel for interior plaster of 6 mm and thicker.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1216A	6 mm	260	115619	Steel, aluzinc	25 PCS / 180 BUN
	6 mm	300	115620	Steel, aluzinc	25 PCS / 150 BUN




PLASTER STOP PROFILES

Stop profile for interior plaster

Plaster stop profile made of galvanised steel with increased zinc coating for interior plaster of 9 mm and thicker.


Aluminium version : 9111
Stainless steel version: 2178



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1211	9 mm	250	107972	Galvanised steel	25 PCS / 100 BUN
	9 mm	260	107974	Galvanised steel	25 PCS / 100 BUN
	9 mm	300	107973	Galvanised steel	25 PCS / 90 BUN
1210	14 mm	250	107946	Galvanised steel	25 PCS / 80 BUN
	14 mm	300	107947	Galvanised steel	25 PCS / 80 BUN

Stop profile for interior plaster


Plaster stop profile made of galvanised steel for interior plaster of 9 mm and thicker. Created using folding method.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
12111	9 mm	250	119070	Galvanised steel	25 PCS / 100 BUN
	9 mm	260	119075	Galvanised steel	25 PCS / 100 BUN
	9 mm	300	119076	Galvanised steel	25 PCS / 90 BUN

Stop profile for interior plaster


Aluminium plaster stop profile for interior plasters of 10 mm and thicker. With an extra-long plastering leg.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9135	10 mm	250	105937	Aluminum natural	20 PCS / 150 BUN

Stop profile for interior plaster

Plaster stop profile made of galvanised steel for interior plaster of 10 mm and thicker. With expanded metal wing and additional plaster removal edge.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1231	10 mm	250	102319	Galvanised steel	25 PCS / 70 BUN
	10 mm	260	102322	Galvanised steel	25 PCS / 70 BUN
	10 mm	300	102327	Galvanised steel	25 PCS / 70 BUN
1235	10 mm	250	119040	Galvanised steel	24 PCS / 72 BUN
	10 mm	260	119041	Galvanised steel	24 PCS / 72 BUN
	10 mm	300	119042	Galvanised steel	24 PCS / 72 BUN

NEW

NEW

NEW

Finishing profile for interior plastering with foam tape

Plaster finishing profile 10 mm with foam tape.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
12351	10 mm	250	120277	Galvanised steel	16 PCS / 49 BOX



Stop profile for interior plaster

Stop profile made of aluzinked steel with filler perforation for 10 mm thick plasterboard.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1212A		300	115765	Steel, aluzinc	25 PCS / 100 BUN



Stop profile for interior plaster

Plaster stop profile made of galvanised steel for interior plaster of 12 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1218	12 mm	250	107449	Galvanised steel	25 PCS / 64 BUN
	12 mm	300	107450	Galvanised steel	25 PCS / 64 BUN
1220	18 mm	250	107468	Galvanised steel	25 PCS / 55 BUN
	18 mm	300	107469	Galvanised steel	25 PCS / 55 BUN



Stop profile for interior plaster

Plaster stop profile made of galvanised steel for interior plaster of 14 mm and thicker. With expanded metal wing and additional 5-mm plaster removal edge.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1230	14 mm	250	102307	Galvanised steel	25 PCS / 60 BUN
	14 mm	300	102311	Galvanised steel	25 PCS / 60 BUN



Stop profile for interior plaster

Connection/stop profile made of galvanised steel for interior plaster of 14 mm and thicker.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1321	14 mm	300	101276	Galvanised steel	15 PCS / 65 BUN




BASE PROFILES

Base stop profile for interior plaster

Base stop profile made of galvanised steel for interior plaster of 9 mm and thicker.

Angular position: 110°

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1219	9 mm	250	107485	Galvanised steel	25 PCS / 60 BUN
	9 mm	300	107486	Galvanised steel	25 PCS / 60 BUN




Base stop profile for interior plaster

Base stop profile made of galvanised steel for interior plaster of 15 mm and thicker.

Angular position: 110°

Stainless steel version: 2229

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1214	15 mm	300	107610	Galvanised steel	25 PCS / 60 BUN




Expansion joint profile for interior plaster

Movement joint profile made of hard PVC and middle part made of soft PVC for interior and exterior plastering from 6 mm, for use on the surface and in the inside corner. Outdoors and in wet rooms only for vertical use.

Colour: 10 - white

Movement absorption tension/compression:
+/-1,5 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3753	6 mm	275	110683	PVC	25 PCS / 36 BOX
3754	10 mm	275	110695	PVC	25 PCS / 36 BOX



Expansion joint profile for interior plaster

Expansion joint profile made of galvanized steel with increased zinc coating for interior plaster from 6 mm.

Movement absorption tension/compression:
+/-5 mm


Stainless steel version: 2236;2135

Notes:

See data sheet for possible profile combinations.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1206Z	6 mm	250	100769	Galvanised steel	25 PCS / 130 BUN
	6 mm	300	100785	Galvanised steel	25 PCS / 130 BUN



Movement joint profile for interior and exterior plastering


Movement joint profile made of galvanized steel and middle part made of soft PVC for interior and exterior plastering from 10 mm. Outdoors for vertical use only.

Colour: 10 - white

Stainless steel version: 7541

Movement absorption tension/compression:
+/-1,5 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7501	10 mm	300	102505	Galvanised steel, with PVC coating	10 PCS / 24 BOX
7503	14 mm	300	102506	Galvanised steel, with PVC coating	10 PCS / 24 BOX



Expansion joint profile for interior and exterior render


Movement joint profile made of stainless steel and middle part made of soft PVC for interior and exterior plastering from 10 mm. Outdoors and in wet rooms only for vertical use.

Colour: 10 - white

Movement absorption tension/compression:
+/-1,5 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7541	10 mm	300	102514	Stainless steel, with PVC coating	10 PCS / 24 BOX



JOINT PROFILES


Expansion joint profile for interior and exterior render

Expansion joint profile made of stainless steel and middle part made of soft PVC for interior and exterior plastering from 10 mm, for use on the surface and in the inside corner. Outdoors and in wet rooms only for vertical use.

Colour: 10 - white
Movement absorption tension/compression: +4/-3 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7571	10 mm	300	102517	Stainless steel, with PVC coating	10 PCS / 24 BOX
7573	14 mm	300	102518	Stainless steel, with PVC coating	10 PCS / 24 BOX




Expansion joint profile for interior and exterior render

Expansion joint profile made of galvanized steel and middle part made of soft PVC for interior and exterior plastering from 14 mm, for use on the surface and in the inside corner. Outdoors for vertical use only.

Colour: 10 - white
Movement absorption tension/compression: +4/-3 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7521	10 mm	300	102509	Galvanised steel, with PVC coating	10 PCS / 24 BOX
7523	14 mm	300	102511	Galvanised steel, with PVC coating	10 PCS / 24 BOX




Expansion joint profile for interior plaster

Expansion joint profile made of galvanized steel with increased zinc coating for interior plaster from 14 mm.

Movement absorption tension/compression: +/-10 mm
Notes: See data sheet for possible profile combinations.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1201Z	14 mm	250	108133	Galvanised steel	15 PCS / 81 BUN
	14 mm	300	108134	Galvanised steel	15 PCS / 81 BUN



Picture profile for interior plaster

Images bar made of galvanized steel for interior plaster from 12 mm.

Notes:
Use connector 1113 to extend the picture rail and order separately. Matching picture hooks Article 1114.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1110	12 mm	250	100942	Galvanised steel	25 PCS / 42 BUN



Connector for Picture profile 1110 for interior plaster

Accessories for Picture profile 1110.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
SALE 1113		3	101003	Galvanised steel	20 PCE / 4.000 BAG



Picture hook for Picture profile 1110 for interior plaster

Accessories for Picture profile 1110.

Notes:
Only suitable for picture rail 1110.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1114		3	102339	Brass	25 PCE / 99 BOX



PLASTER BASES

Laths for interior and exterior plaster (Stucanet® 33)

Plaster base board for interior and exterior plaster made of galvanised wire. Intermediate layer made of moisture-absorbing cardboard.

Notes:

Board dimensions: 258,5 x 33 cm (0.85 m²)




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
17709	20 mm	258	116294	Galvanised steel	15 PCE / 50 BUN

Laths for interior and exterior plaster (Stucanet® S)

Plaster base board for interior and exterior plaster made of galvanised wire. Intermediate layer made of moisture-absorbing cardboard.

Notes:

Board dimensions: 240 x 70 cm (1.68 m²)



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
17710	20 mm	240	116295	Galvanised steel	15 PCE / 25 BUN

Laths for interior and exterior plaster (Stucanet® SE)

Plaster base board for interior and exterior plaster made of stainless steel wire. Intermediate layer made of moisture-absorbing cardboard.

Notes:

Panel dimensions: 240 x 70 cm (1.68 m²)



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
17708	20 mm	240	116293	Stainless steel	15 PCE / 25 BUN

Laths for interior and exterior plaster (Stucanet® 80)

Plaster base board for interior and exterior plaster made of galvanised steel wire. Intermediate layer made of moisture-absorbing cardboard.

Notes:

Board dimensions: 240 x 70 cm (1.68 m²)



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
17711	20 mm	240	120339	Galvanised steel	15 PCE / 8 BUN

Reinforcing mesh interior plaster

Reinforcing mesh for interior plaster.
4 x 4 mm, 75 g/m², fabric width 12.5 cm

Processing instructions:

Features: Alkali-resistant, displacement-resistant, plasticizer-free

color value: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
14912		10,000	118633	Alkali-resistant glass fibre mesh	100 M / 192 ROL

Reinforcing mesh interior plaster

Reinforcing mesh for interior plaster.
4 x 4 mm, 75 g/m², fabric width 25 cm

color value: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
14913		10,000	118634	Alcali-resistant glass fibre mesh	100 M / 96 ROL

Reinforcing mesh interior plaster

Reinforcing mesh for interior plaster.
4 x 4 mm, 75 g/m², fabric width 50 cm

color value: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
14914		10,000	118635	Alcali-resistant glass fibre mesh	100 M / 48 ROL

Reinforcing mesh interior plaster

Reinforcing mesh for interior plaster.
4 x 4 mm, 75 g/m², fabric width 100 cm

color value: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
14915		10,000	118636	Alcali-resistant glass fibre mesh	100 M / 24 ROL

Corrugated reinforced mesh

Insulating plaster base mat made of welded, galvanised wire mesh, for interior and exterior insulating plaster from 30 mm.

Notes:
Panel dimensions: 234 x 100 x 3 cm (2.34 m²)



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1432	50 mm	234	116499	Galvanised steel	20 PCE / 20 BUN

Dowel with retaining plate

Fastening set consisting of plastic dowel, washer in wave fit and screw, for insulation plaster base mats 1432 type Welnet® 30.

Processing instructions:
At least 9 dowels are required per m² of insulation plaster base mat. Fastening is always carried out in the corrugated valley of the insulation plaster base mat.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1433		0	113649	Galvanised steel	250 PCE / 10 BOX
1434		0	113648	Galvanised steel	250 PCE / 10 BOX



GENERAL INFORMATION

- Various plaster profiles made of galvanized steel, aluminum with coating, stainless steel, plastic or also material combinations are used for external rendering.
- Galvanized steel profiles for external rendering either have an additional PVC coating in the profile head or are equipped with an increased zinc layer for increased corrosion protection and increased safety (marking „Z“).
- We recommend the use of stainless-steel profiles for very exposed locations and facades exposed to heavy weather.
- When using pasty finishing plasters (silicate/silicone resin/dispersion plasters), preferably use profiles made of white aluminum or stainless steel. For wire corner beads, use only those made of galvanized steel with additional organic coating (APP/APPA) or stainless steel (APE). Only use plaster profiles and wire corner beads made of galvanized steel without organic coating in outdoor areas with PVC coating or additionally protect them with a quartz-filled, organically bound plaster primer (undiluted).
- Some galvanized profiles with PVC coating are manufactured with additional surface embossing for optimum plaster adhesion on the profile legs. Please note the „Power-Grip“ icon.
- Galvanized profiles with PVC coating are also suitable for fine scratched plasters.
- In areas in contact with the ground and/or plinth areas with influences such as snow accumulation, exposure to road salt or heavy splash water, plaster profiles made of corrosion-resistant material (e.g. stainless steel) should be used.
- Cut metal profiles with hand shears. Never cut galvanized profiles with a cutting disc. Process stainless steel profiles only with stainless steel tools and cut with a cutting disc recommended for stainless steel. Cut PVC profiles to the required installation dimension using suitable PVC shears (e.g. Protektor profile shears).
- Remove any nails used for pre-fixing before rendering.
- Set the profiles with suitable mortar (no plaster or material containing plaster) and align them flush and plumb.
- The heads of the plastering gauges must not protrude; re-smoothing may be necessary.
- For internal plaster profiles, the profile edge should remain visible or be covered, depending on the specification (single-layer or two-layer plaster).
- Clean flush metal parts, e.g. profile heads and PVC parts immediately after plastering.
- Do not plaster over PVC coatings, clean immediately after plastering. If profile joints are required, push over PVC covers by approx. 10 cm as butt connector.
- Galvanized profiles with rough edges may be plastered over.

- All external rendering profiles without PVC edge must be completely covered with plaster so that the profile edge is no longer visible. The covering must be at least the grain thickness of the finishing plaster (preferably at least 3 mm).
- Elastic middle parts of expansion joint profiles and metal surfaces that remain visible must be masked off before plastering. The masking strip must be removed immediately after plastering.
- Store all profiles in a dry place! Also, store PVC profiles in a cool and frost-free place, horizontally and lying flat.

All standards and guidelines on the subject of plaster must be observed in their current version, in particular the following leaflet:

- Leaflet for the planning and application of metallic plaster profiles in external and internal areas from the European Association of Plaster Profile Manufacturers.
- Guideline „Façade plinth rendering / outdoor facilities“ from the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF) and other associations
- Guideline „Metal Connections to Plaster, External Thermal Insulation and External Thermal Insulation Composite Systems“ from the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF) and other associations
- Guideline „Connections to windows and roller shutters in plaster, external thermal insulation composite systems and drywall construction“ from the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF), the Fachverband Glas, Fenster, Fassade Baden-Württemberg and the Bundesverband Rollläden + Sonnenschutz e. V.
- Leaflet „Formation of details with profiles and joint sealing tapes for external rendering and ETICS“ from the Association for Insulation Systems, Plaster and Mortar (VDPM)
- „Processing Guideline for Plastering and Stop Profiles“ by the Austrian Working Group for Plaster (ÖAP).

The product information as well as the additional information with the respective product illustrations in this catalogue and the further notes in our product data sheets and processing instructions on our homepage must be observed!

For the selection of metallic plaster profiles, please refer to the table for profile selection by mortar type, for the selection of plastering strips and plastering sealing strips, please refer to the corresponding selection tables by movement classes and areas of application in this catalogue, as well as the complete instructions for selection, processing and installation on our homepage.


CORNER PROFILES

Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 8 mm and thicker.

Colour: 10 - white

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1023	8 mm	250	100082	Galvanised steel, with PVC coating	15 PCS / 90 BUN
	8 mm	300	100084	Galvanised steel, with PVC coating	15 PCS / 90 BUN




EXTERNAL
RENDERING

Corner bead for interior plaster and exterior render

Corner profile made of galvanised steel with thicker zinc coating for increased protection against corrosion, for interior and exterior plaster of 10 mm and thicker.



Item number	Plaster thickness (mm)	Length (cm)	Leg length	Order number	Material	Package/ Large pack
1085Z	10 mm	250	50 mm	100803	Galvanised steel	15 PCS / 42 BUN
	10 mm	300	50 mm	100811	Galvanised steel	15 PCS / 42 BUN
1045Z	12 mm	260	45 mm	113659	Galvanised steel	15 PCS / 42 BUN
	12 mm	300	45 mm	113658	Galvanised steel	15 PCS / 42 BUN
1043Z	15 mm	225	50 mm	108704	Galvanised steel	15 PCS / 48 BUN
	15 mm	250	50 mm	100508	Galvanised steel	15 PCS / 48 BUN
	15 mm	260	50 mm	103936	Galvanised steel	15 PCS / 48 BUN
	15 mm	275	50 mm	100520	Galvanised steel	15 PCS / 48 BUN
	15 mm	300	50 mm	100530	Galvanised steel	15 PCS / 48 BUN
	15 mm	300	50 mm	100530	Galvanised steel	15 PCS / 48 BUN




Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating with a narrow removal edge for interior and exterior plaster of 10 mm and thicker.

**POWER
GRIP**

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1821	10 mm	225	117729	Galvanised steel, with PVC coating	15 PCS / 48 BUN
	10 mm	250	117730	Galvanised steel, with PVC coating	15 PCS / 48 BUN
	10 mm	260	117731	Galvanised steel, with PVC coating	15 PCS / 48 BUN
	10 mm	275	117732	Galvanised steel, with PVC coating	15 PCS / 48 BUN
	10 mm	300	117733	Galvanised steel, with PVC coating	15 PCS / 48 BUN
1824	14 mm	250	117734	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	260	117735	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	275	117736	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	300	117737	Galvanised steel, with PVC coating	15 PCS / 56 BUN



CORNER PROFILES

Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for various plaster thicknesses (a). In the reveal area additionally for different plaster thicknesses variable applicable.

Colour: 10 - white

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1061	10 mm	250	100612	Galvanised steel, with PVC coating	15 PCS / 88 BUN
	10 mm	300	100625	Galvanised steel, with PVC coating	15 PCS / 88 BUN
1080	15 mm	300	100774	Galvanised steel, with PVC coating	15 PCS / 90 BUN
1062	20 mm	300	100646	Galvanised steel, with PVC coating	15 PCS / 64 BUN




Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 10 mm and thicker.

Colour: 10 - white
Rounding off radius: 3,5 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1046	10 mm	225	105578	Galvanised steel, with PVC coating	15 PCS / 42 BUN
	10 mm	250	102534	Galvanised steel, with PVC coating	15 PCS / 42 BUN
	10 mm	300	102541	Galvanised steel, with PVC coating	15 PCS / 42 BUN




Corner bead for exterior plaster

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 10 mm and thicker.

Colour: 10 - white
Rounding off radius: 4,25 mm

POWER GRIP

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1020	10 mm	225	117718	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	10 mm	250	117719	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	10 mm	250	117713	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	10 mm	300	117722	Galvanised steel, with PVC coating	15 PCS / 56 BUN




Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 12 mm and thicker.

Colour: 10 - white
Rounding off radius: 4 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1086	12 mm	300	100829	Galvanised steel, with PVC coating	15 PCS / 35 BUN



SALE

CORNER PROFILES


Corner bead for interior plaster and exterior render

Corner profile made of galvanised steel with thicker zinc coating for increased protection against corrosion, for interior and exterior plaster of 12 mm and thicker.

Aluminium version : 9112
Stainless steel version: 2212



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1012Z	12 mm	225	117695	Galvanised steel	15 PCS / 72 BUN
	12 mm	250	117696	Galvanised steel	15 PCS / 72 BUN
	12 mm	275	117697	Galvanised steel	15 PCS / 72 BUN
	12 mm	300	117698	Galvanised steel	15 PCS / 72 BUN



EXTERNAL RENDERING


Corner bead for interior plaster

Corner profile made of galvanised steel for interior and exterior plaster of 12 mm and thicker.

Notes:
PowerGrip surface embossing for improved plaster adhesion.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1012Z	12 mm	225	119120	Galvanised steel	15 PCS / 72 BUN
	12 mm	250	119121	Galvanised steel	15 PCS / 72 BUN
	12 mm	275	119122	Galvanised steel	15 PCS / 72 BUN
	12 mm	300	119123	Galvanised steel	15 PCS / 72 BUN




Corner bead for interior plaster and exterior render

Corner profile made of galvanised steel with thicker zinc coating for increased protection against corrosion, for interior and exterior plaster of 14 mm and thicker.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1024Z	14 mm	250	100089	Galvanised steel	15 PCS / 40 BUN
	14 mm	300	100093	Galvanised steel	15 PCS / 40 BUN




CORNER PROFILES

Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 14 mm and thicker.


Colour: 10 - white
Rounding off radius: 4 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1013	14 mm	200	117705	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	225	117706	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	250	117707	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	260	117708	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	275	117709	Galvanised steel, with PVC coating	15 PCS / 56 BUN
	14 mm	300	117710	Galvanised steel, with PVC coating	15 PCS / 56 BUN

Corner bead for interior plaster and exterior render

Corner profile with uneven flanges, made of galvanised steel with thicker zinc coating for increased protection against corrosion, for interior and exterior plaster of 15 mm and thicker.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
SALE 1039Z	15 mm	260	100474	Galvanised steel	15 PCS / 64 BUN

Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 15 mm and thicker.

Colour: 10 - white
Rounding off radius: 3,5 mm




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1028	15 mm	250	100384	Galvanised steel, with PVC coating	15 PCS / 42 BUN
	15 mm	300	100400	Galvanised steel, with PVC coating	15 PCS / 42 BUN

Corner bead for exterior render

Corner profile made of galvanised steel with PVC coating for interior and exterior plaster of 20 mm and thicker.

Colour: 10 - white
Rounding off radius: 4,25 mm

Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1014	20 mm	250	100541	Galvanised steel, with PVC coating	15 PCS / 42 BUN
	20 mm	300	100552	Galvanised steel, with PVC coating	15 PCS / 42 BUN

Stop profile for exterior render

Sliding joint profile made of galvanised steel with PVC coating for exterior plaster of 10 mm and thicker.

Colour: 10 - white
Notes:
On surfaces exposed to moisture and water as well as exposed components, use only vertically.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1224	10 mm	250	107487	Galvanised steel, with PVC coating	25 PCS / 50 BUN
	10 mm	300	107488	Galvanised steel, with PVC coating	25 PCS / 50 BUN
1223	14 mm	250	107380	Galvanised steel, with PVC coating	25 PCS / 49 BUN
	14 mm	300	107381	Galvanised steel, with PVC coating	25 PCS / 49 BUN
1222	20 mm	250	107471	Galvanised steel, with PVC coating	25 PCS / 42 BUN
	20 mm	300	107472	Galvanised steel, with PVC coating	25 PCS / 42 BUN




Stop profile roof for exterior render

Stop profiles made of galvanised steel provide a fix against roof planking between the rafters and provide DIN-conform roof ventilation.

Ventilation area: 207 cm²/lfm.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1241	13 mm	250	100972	Galvanised steel	20 PCS / 84 BUN
1242	23 mm	250	100973	Galvanised steel	20 PCS / 91 BUN




BASE PROFILES

Base stop profile for exterior render

Base profile made of galvanised steel with PVC coating for exterior plaster of 10 mm and thicker.

Colour: 10 - white
Angular position: 110°

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1227	10 mm	250	107491	Galvanised steel, with PVC coating	25 PCS / 55 BUN
	10 mm	300	107492	Galvanised steel, with PVC coating	25 PCS / 55 BUN




Base stop profile for exterior render

Base profile made of galvanised steel with PVC coating for exterior plaster of 14 mm and thicker.

Colour: 10 - white
Angular position: 110°

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1225	14 mm	250	107402	Galvanised steel, with PVC coating	25 PCS / 49 BUN
	14 mm	300	107403	Galvanised steel, with PVC coating	25 PCS / 49 BUN




Base stop profile for exterior render

Base profile made of galvanised steel with PVC coating for exterior plaster of 20 mm and thicker.

Colour: 10 - white
Angular position: 110°

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1229	20 mm	250	107545	Galvanised steel, with PVC coating	25 PCS / 40 BUN
	20 mm	300	107546	Galvanised steel, with PVC coating	25 PCS / 40 BUN




CONNECTING PROFILES

DIMPLED SHEET PROFILES

Dimpled sheet profile Universal - Base profile - Alu

Dimpled track profile universal Base profile made of aluminium. Also available as a set 90535.


Item number	Length (cm)	Order number	Material	Package/ Large pack
90527	250	119860	Aluminum	5 PCS / 80 BUN



Dimpled sheet universel - Cover profile

Dimpled track profile universal Cover profile made of hard PVC for clipping onto aluminium base profile 90527. Also available as a set 90535.

Item number	Length (cm)	Order number	Material	Colour	Package/ Large pack
37527	250	120113	PVC	91 - anthracite	5 PCS / 49 BOX



Dimpled sheet profile universal - Set Anthracite


Dimpled track profile universal - Set for 12.5 m studded track cover, composed of: 5 basic profiles of 250 cm each made of aluminium (90527) and 5 cover profiles of 250 cm each made of PVC (37527).

Colour: 91 - anthracite

Notes:

Profile combination for 12.5 metres of studded membrane cover.

Item number	Length (cm)	Order number	Material	Package/ Large pack
90535	250	119863		1 PCE / 36 BOX



Dimpled sheet profile

Convuluted sheet/overhang profile made of stainless steel for interior and exterior plastering from 14 mm.

For the horizontal transition from the protective layer (dimpled membrane, drainage mat, etc.) to the base area. Also suitable for vertical and horizontal use as an expansion joint/overhang profile.


Movement absorption tension/compression:
+/-10 mm

Notes:

Liability for coating adhesion on stainless steel profiles is expressly excluded.
On-site colour coating of our stainless steel profiles is possible with suitable coatings. The technical specifications in the coating manufacturer's current data sheets must be observed and test areas created if necessary.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2768	14 mm	250	115283	Stainless steel	10 PCS / 100 BUN



CONNECTING PROFILES

EXPANSION JOINT / OVERHANG PROFILES

Expansion joint profile for interior and exterior render


Expansion joint/overhang profile made of stainless steel for interior and exterior plastering from 14 mm. Suitable for vertical and horizontal use.

Movement absorption tension/compression:
+/- 10 mm

Notes:
See data sheet for possible profile combinations.
Liability for coating adhesion on stainless steel profiles is expressly excluded. On-site colour coating of our stainless steel profiles is possible with suitable coatings. The technical specifications in the coating manufacturer's current data sheets must be observed and test areas created if necessary.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2297	14 mm	250	114955	Stainless steel	25 PCS / 100 BUN
2299	20 mm	250	114956	Stainless steel	25 PCS / 100 BUN




Metal sheet connecting profile for exterior render

Plasterable metal connection profile made of stainless steel for exterior plaster of 18 mm and thicker.

Notes:
An additional fabric-reinforced plaster layer on the base coat is recommended, to increase the stability of the plaster layer.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2765	18 mm	250	117190	Stainless steel	10 PCS / 49 BUN




Metal sheet connecting profile for exterior render

Metal connection profile made of galvanised steel with PVC coating for exterior plaster of 20 mm and thicker.

Colour: 10 - white

Notes:
Suitable for sheet thicknesses of approx. 0.8 - 1.0 mm, consider overlapping joint area.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1765	20 mm	250	113726	Galvanised steel, with PVC coating	10 PCS / 80 BUN



CONNECTING PROFILES

EXPANSION JOINT / OVERHANG PROFILES


Connecting profile for plaster and ceramic

Connecting profile made of stainless steel with a nosing of 20 mm for the horizontal transition of plaster surfaces to surfaces with ceramic coverings.

Notes:
Liability for coating adhesion on stainless steel profiles is expressly excluded. On-site colour coating of our stainless steel profiles is possible with suitable coatings. The technical specifications in the coating manufacturer's current data sheets must be observed and test areas created if necessary.



Item number	Product width	Length (cm)	Order number	Material	Package/ Large pack
2293	20 mm	250	114417	Stainless steel	10 PCS / 80 BUN
2295	30 mm	250	114418	Stainless steel	10 PCS / 80 BUN



CONNECTING PROFILES


CONNECTING PROFILES

Connection profile to roller shutter/venetian with mesh

Self-sticking connection profile of PVC with sewn alkali-resistant, coarse-meshed glass fibre mesh for plaster and WDVS, for producing connectors on roller shutter boxes with drip edge. For putting on to the border of the roller shutter box apron, additionally with self-sticking foam tape, close-celled, for optional glue mounting on thinner sheets.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 7 x 7 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37946	6 mm	250	114676	Rigid PVC with glass fibre mesh	25 PCS / 13 BOX




Connection profile to roller shutter/venetian with mesh

Self-sticking connection profile of PVC with sewn alkali-resistant, coarse-meshed glass fibre mesh for plaster and WDVS, for producing connectors on roller shutter boxes with drip edge. For putting on to the border of the roller shutter box apron, additionally with self-sticking foam tape, close-celled, for optional glue mounting on thinner sheets.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 7 x 7 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37428	6 mm	250	114675	Rigid PVC with glass fibre mesh	25 PCS / 13 BOX




Connection profile to roller shutter/venetian with mesh

Connection profile of PVC with sewn alkali-resistant, coarse-meshed glass fibre mesh for plaster and WDVS, for producing connectors on roller shutter boxes with drip edge. For putting on to the border of the roller shutter box apron.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 7 x 7 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37429	6 mm	250	115769	Rigid PVC with glass fibre mesh	25 PCS / 13 BOX




Attica profile for exterior render

White PVC stop profile for plaster thicknesses of 14 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.

Colour: 10 - white
Notes:
Only visible side white, plaster leg grey.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37214	14 mm	250	119310	Hard PVC	25 PCS / 20 BOX

NEW



Sliding joint profile for exterior render


Sliding joint profile made of galvanised steel with PVC coating for interior and exterior plaster of 14 mm and thicker.

Colour: 10 - white

Notes:

The sliding bearing joint profile is made up of the upper part of the plinth profile 1225 and the lower part 1240.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1240	14 mm	300	107608	Galvanised steel, with PVC coating	25 PCS / 40 BUN
	14 mm	250	107402	Galvanised steel, with PVC coating	25 PCS / 49 BUN
	14 mm	300	107403	Galvanised steel, with PVC coating	25 PCS / 49 BUN



Sliding joint profile for exterior render


Sliding joint profile made of galvanised steel with PVC coating for interior and exterior plaster of 20 mm and thicker.

Colour: 10 - white

Notes:

The sliding bearing joint profile is made up of the upper part of the plinth profile 1229 and the lower part 1226.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1226	20 mm	300	107470	Galvanised steel, with PVC coating	25 PCS / 56 BUN
	20 mm	250	107545	Galvanised steel, with PVC coating	25 PCS / 40 BUN
	20 mm	300	107546	Galvanised steel, with PVC coating	25 PCS / 40 BUN



SALE


DESIGN PROFILES

Bossprofile for interior plaster and exterior render

Boss aluminium profile with white base coat for interior and exterior plaster of 17 mm and thicker. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9293	17 mm	250	102139	Aluminum, with basic coating	20 PCS / 35 BUN




Bossprofile for interior plaster and exterior render

Boss aluminium profile with white base coat for interior and exterior plaster of 18.5 mm and thicker. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9294	18,5 mm	250	102141	Aluminum, with basic coating	20 PCS / 35 BUN




Bossprofile for interior plaster and exterior render

Boss aluminium profile with white base coat for interior and exterior plaster of 20 mm or more. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9295	20 mm	250	102143	Aluminum, with basic coating	20 PCS / 40 BUN



Wired corner bead for interior plaster (IP)

Wire alignment bracket made of galvanised steel for interior and exterior plaster of 10 mm and thicker.


Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1156	10 mm	250	108933	Galvanised steel	40 PCS / 48 BOX
	10 mm	295	102031	Galvanised steel	40 PCS / 48 BOX



Wired corner bead for interior and exterior plaster (AP)

Wire alignment bracket made of galvanised steel for interior and exterior plaster of 15 mm and thicker.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11511	15 mm	260	115426	Galvanised steel	40 PCS / 56 BOX
	15 mm	275	115502	Galvanised steel	40 PCS / 56 BOX
	15 mm	295	115427	Galvanised steel	40 PCS / 56 BOX



Wired corner bead for interior and exterior plaster (APP)

Wire alignment bracket made of galvanised steel with white basecoat polyester coating for interior and exterior plaster of 15 mm and thicker. **Colour:** 10 - white

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11571	15 mm	260	116290	Galvanised steel, with white basic coating	40 PCS / 56 BOX
	15 mm	295	116048	Galvanised steel, with white basic coating	40 PCS / 56 BOX



Wired corner bead for interior and exterior plaster (APS)

Wire alignment bracket made of galvanised steel for interior and exterior plaster of 15 mm and thicker. **Notes:** Particularly suitable for coarse-grained base coats due to the use of only two longitudinal wires.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11541	15 mm	260	115424	Galvanised steel	40 PCS / 56 BOX
	15 mm	275	115503	Galvanised steel	40 PCS / 56 BOX
	15 mm	295	115425	Galvanised steel	40 PCS / 56 BOX



WIRED CORNER BEADS

Wired corner bead for interior and exterior plaster (APE)

Stainless steel wire alignment bracket for interior and exterior plasters of 15 mm and thicker.

Notes:
Particularly suitable for coarse-grained base coats due to the use of only two longitudinal wires.
Processing instructions:
Ideally suited for coarse-grained base plaster.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11521	15 mm	295	115513	Stainless steel	40 PCS / 56 BOX

Wired corner bead for interior and exterior plaster (APA)

Wire alignment bracket made of galvanised steel for interior and exterior plaster of 15 mm and thicker.

Notes:
Uneven leg length. Cover edges with at least 3 mm mineral finishing render.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11531	15 mm	260	115514	Galvanised steel	40 PCS / 56 BOX
	15 mm	275	115515	Galvanised steel	40 PCS / 56 BOX
	15 mm	295	115516	Galvanised steel	40 PCS / 56 BOX

Wired corner bead for interior and exterior plaster (APPA)

Wire alignment bracket made of galvanised steel with white basecoat for interior and exterior plaster of 15 mm and thicker.

Colour: 10 - white
Notes:
Uneven leg length. Cover edges with at least 3 mm mineral finishing render.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11551	15 mm	295	116047	Galvanised steel, with white basic coating	40 PCS / 56 BOX

Wired corner bead for interior and exterior plaster (APR)

Wire alignment bracket made of galvanised steel specially designed for rounded edges on interior and exterior plaster of 15 mm and thicker.

Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11601	15 mm	295	115517	Galvanised steel	40 PCS / 56 BOX

Wired corner bead for interior and exterior plaster (APB)

Wire alignment bracket made of galvanised steel for arched constructions with interior and exterior plaster of 15 mm and thicker.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
11581	15 mm	295	115518	Galvanised steel	40 PCS / 56 BOX



Wired corner bead for interior and exterior plaster (APK)

Wire alignment bracket made of galvanised steel with PVC edge for interior and exterior plaster of 15 mm and thicker.

Colour: 10 - white
Notes: Particularly suitable for scratch plaster.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1161	15 mm	295	102045	Galvanised steel, with PVC coating	25 PCS / 30 BOX




Wired corner bead for interior and exterior plaster (APBK)

Wire alignment bracket made of galvanised steel with PVC edge for arched constructions with interior and exterior plaster of 15 mm and thicker.

Colour: 10 - white
Notes: Particularly suitable for scratch plaster.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1159	15 mm	295	102038	Galvanised steel, with PVC coating	25 PCS / 30 BOX





GENERAL INFORMATION

- Wet rooms include domestic bathrooms, shower facilities, swimming pools, production areas, commercially used areas, including kitchens, etc. in which plaster and profiles are exposed to increased moisture. Only profiles with increased corrosion protection or made of corrosion-resistant material may be used there.
- In DIN 18534, waterproofing of interiors, a distinction is made in Part 1 between different water impact classes:
 - ▶ W0-I – low water impact
 - ▶ W1-I – moderate water impact
 - ▶ W2-I – high water impact
 - ▶ W3-I – very high water impact
- ▶ Our plaster profiles are therefore marked in this product area according to their suitability for these water impact classes:
- ▶ For rooms with water impact classes W0-I to W2-I, plaster profiles made of aluminum with a white base coat can be used.
- ▶ For rooms with water impact class W3-I, plaster profiles made of stainless steel must be used. Those can therefore be used for all water impact classes from W0-I to W3-I, provided that the profiles are covered by plaster, tiles or paint (exposed profiles require special care, see product information).
- Plaster profiles made of galvanized steel may only be used in Wet rooms if they are removed again after completion of the plastering.
- Cut metal profiles with hand shears. Never cut galvanized profiles with a cutting disc. Only process stainless steel profiles with rustproof tools and cut them with a cutting disc recommended for stainless steel.
- Remove any nails used for pre-fixing before plastering.
- In Wet rooms, attach the profiles with especially suitable mortar or with the plaster mortar to be used and align them flush and plumb.
- The heads of the plastering gauges must not protrude; re-smoothing may be necessary.
- The profile edge should remain visible or be covered, depending on the specification (single-layer or two-layer plaster).
- Clean flush metal parts, e.g. profile heads and PVC parts immediately after plastering.
- Ensure good ventilation after plastering.
- Store profiles in a dry place!

All standards and guidelines on the subject of plastering must be observed in their current version, in particular the following leaflets:


- Leaflet for the planning and application of metallic plaster profiles in external and internal areas from the European Association of Plaster Profile Manufacturers.
- Merkblatt Leaflet on plaster and drywall construction in Wet rooms with cladding made of ceramic tiles and boards or natural stone from the Finishing Division of the Central Association of the German Building Trade.

The product information as well as the additional information with the respective product illustrations in this catalogue and the further notes in our product data sheets and processing instructions on our homepage must be observed!



Corner bead for interior plaster and exterior render

Stainless steel corner profile for filler and thin-layer plaster of 3 mm and thicker in interior or exterior areas. Suited for use in damp and wet areas.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2274	3 mm	250	107674	Stainless steel	25 PCS / 200 BUN

Corner bead for interior plaster and exterior render

Aluminium corner profile with white base coating for thin-layer plaster of 6 mm and thicker in interior or exterior areas.

Colour: 10 - white
Galvanised steel version : 1084




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9104	6 mm	250	107166	Aluminum, with basic coating	25 PCS / 88 BUN
	6 mm	300	107168	Aluminum, with basic coating	25 PCS / 88 BUN

Corner bead for interior plaster and exterior render

Aluminium corner profile with white base coat for interior and exterior plaster of 8 mm and thicker.

Colour: 10 - white
Galvanised steel version : 1026




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9100	8 mm	260	108705	Aluminum, with basic coating	25 PCS / 56 BUN
	8 mm	275	112171	Aluminum, with basic coating	25 PCS / 56 BUN
	8 mm	300	108706	Aluminum, with basic coating	25 PCS / 56 BUN

Corner bead for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 8 mm and thicker. Suited for use in damp and wet areas.

Rounding off radius: 4,75 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2215	8 mm	260	108395	Stainless steel	25 PCS / 66 BUN

EDGE PROFILES CORROSION PROTECTION

Corner bead for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 8 mm and thicker. Suited for use in damp and wet areas.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2209	8 mm	250	101294	Stainless steel	25 PCS / 120 BUN

Corner bead for interior plaster and exterior render

Aluminium corner profile with white base coating, for interior plaster with various plaster thicknesses.

Colour: 10 - white
Stainless steel version: 2251
Notes:
Can also be used variably in the reveal area for different plaster thicknesses.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
91051	9 mm	270	110603	Aluminum, with basic coating	15 PCS / 100 BUN

Corner bead for interior and exterior plaster

Stainless steel corner profile, for interior and exterior plaster with various plaster thicknesses, e.g., in the soffit area.

Notes:
Can also be used variably in the reveal area for different plaster thicknesses.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2251	9 mm	300	101369	Stainless steel	15 PCS / 88 BUN

Corner bead for interior and exterior plaster

Stainless steel corner profile for interior and exterior plasters of 10 mm and thicker. Suited for use in damp and wet areas.


Rounding off radius: 2,5 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7476	10 mm	300	102499	Stainless steel	25 PCS / 36 BOX

Corner bead for interior plaster and exterior render


Stainless steel corner profile for interior and exterior plasters of 10 mm and thicker. Suited for use in damp and wet areas.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2218	10 mm	250	101324	Stainless steel	25 PCS / 66 BUN
	10 mm	260	107749	Stainless steel	25 PCS / 66 BUN
	10 mm	300	103034	Stainless steel	25 PCS / 66 BUN

Corner bead for interior plaster and exterior render

Aluminium corner profile with white base coating for interior and exterior plaster of 10 mm and thicker.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
91081	10 mm	260	108707	Aluminum, with basic coating	20 PCS / 24 BOX
	10 mm	300	106507	Aluminum, with basic coating	20 PCS / 24 BOX

Corner bead for interior plaster and exterior render

Aluminium corner profile with white base coat for interior and exterior plaster of 10 mm and thicker.

Colour: 10 - white
Rounding off radius: 12,5 mm

Notes:
Specially developed for schools and nurseries. Fulfills the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9571	10 mm	260	106562	Aluminum, with basic coating	15 PCS / 30 BOX

Corner bead for interior plaster and exterior render

Aluminium corner profile with white base coating for interior and exterior plaster of 12 mm and thicker.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9112	12 mm	225	108643	Aluminum, with basic coating	15 PCS / 72 BUN
	12 mm	260	107282	Aluminum, with basic coating	15 PCS / 72 BUN
	12 mm	275	112172	Aluminum, with basic coating	15 PCS / 72 BUN
	12 mm	300	107179	Aluminum, with basic coating	15 PCS / 72 BUN
9134	14 mm	300	107066	Aluminum, with basic coating	15 PCS / 42 BUN
	14 mm	300	120271	Aluminum, with basic coating	15 PCS / 42 BUN

EDGE PROFILES CORROSION PROTECTION


Corner bead for interior plaster and exterior render

Edge profile made of aluminium with white priming coat, for interior and exterior plaster from 12 mm.

Notes:
Optimised hole pattern and optimised perforation of the profile head.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9113	12 mm	260	114497	Aluminum, with basic coating	15 PCS / 64 BUN
	12 mm	275	117236	Aluminum, with basic coating	15 PCS / 64 BUN
	12 mm	300	114499	Aluminum, with basic coating	15 PCS / 64 BUN




Corner bead for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 12 mm and thicker. Suited for use in damp and wet areas.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2212	12 mm	300	105875	Stainless steel	15 PCS / 72 BUN




Corner bead for interior plaster and exterior render

Corner protection beads for interior plaster can be used in damp or wet rooms, or for exterior plaster.

Rounding off radius: 2,5 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
7478	15 mm	250	113769	Stainless steel	25 PCS / 24 BUN
	15 mm	300	113768	Stainless steel	25 PCS / 24 BUN
7483	20 mm	300	102500	Stainless steel	25 PCS / 24 BOX



PLASTER GAUGES CORROSION PROTECTION

Depth gauge profile for interior plaster

Stainless steel plaster depth gauge profile for interior plasters of 6 mm and thicker.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2206	6 mm	260	111975	Stainless steel	50 PCS / 100 BUN
	6 mm	300	111976	Stainless steel	50 PCS / 100 BUN
2205	10 mm	260	111973	Stainless steel	50 PCS / 64 BUN
	10 mm	300	111974	Stainless steel	50 PCS / 64 BUN



Depth gauge profile for interior plaster

Aluminium depth gauge profile with white base coating for interior plaster of 6 mm and thicker.

Colour: 10 - white
Stainless steel version: 2206



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9003	6 mm	260	111977	Aluminum, with basic coating	50 PCS / 100 BUN
	6 mm	300	111978	Aluminum, with basic coating	50 PCS / 100 BUN
	10 mm	260	111979	Aluminum, with basic coating	50 PCS / 64 BUN
9005	10 mm	275	111980	Aluminum, with basic coating	50 PCS / 64 BUN
	10 mm	300	111981	Aluminum, with basic coating	50 PCS / 64 BUN



Depth gauge profile for interior plaster

Aluminium depth gauge profile with white base coating for interior plaster of 8 mm and thicker.

Colour: 10 - white
Stainless steel version: 2208



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9008	8 mm	260	111994	Aluminum, with basic coating	50 PCS / 100 BUN
	8 mm	275	112166	Aluminum, with basic coating	50 PCS / 100 BUN



Depth gauge profile for interior plaster

Stainless steel plaster depth gauge profile for interior plasters of 8 mm and thicker.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2208	8 mm	260	111993	Stainless steel	50 PCS / 100 BUN



PLASTER STOPS CORROSION PROTECTION

Stop profile for interior plaster and exterior render

Stainless steel corner profile for filler and thin-layer plaster of 3 mm and thicker in interior or exterior areas. Suited for use in damp and wet areas.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2136	3 mm	250	101351	Stainless steel	25 PCS / 220 BUN
	3 mm	260	117860	Stainless steel	25 PCS / 220 BUN
	3 mm	300	117861	Stainless steel	25 PCS / 220 BUN

Stop profile for interior plaster and exterior render

Aluminium plaster stop profile with white base coating for interior and exterior plasters of 6 mm and thicker.


Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9123	6 mm	250	116354	Aluminum, with basic coating	25 PCS / 224 BUN
	6 mm	300	116355	Aluminum, with basic coating	25 PCS / 224 BUN

Stop profile for interior plaster and exterior render

Stainless steel plaster stop profile for interior and exterior plasters of 6 mm and thicker. Suited for use in damp and wet areas.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2135	6 mm	250	101345	Stainless steel	25 PCS / 220 BUN
	6 mm	260	117862	Stainless steel	25 PCS / 220 BUN
	6 mm	300	117863	Stainless steel	25 PCS / 220 BUN

Stop profile for interior plaster and exterior render

Stop profile of stainless steel for interior and exterior plaster 8,5 mm and tile thicknesses up to 8 mm.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2178	8,5 mm	250	101246	Stainless steel	20 PCS / 250 BUN
	8,5 mm	300	118468	Stainless steel	20 PCS / 250 BUN
2180	10,5 mm	250	101247	Stainless steel	20 PCS / 240 BUN
	10,5 mm	260	118469	Stainless steel	20 PCS / 240 BUN
	10,5 mm	300	118470	Stainless steel	20 PCS / 240 BUN
2182	12,5 mm	250	101249	Stainless steel	20 PCS / 234 BUN
	12,5 mm	300	118471	Stainless steel	20 PCS / 234 BUN
2231	14 mm	250	101339	Stainless steel	25 PCS / 150 BUN
	14 mm	300	101344	Stainless steel	25 PCS / 150 BUN
2232	16,5 mm	300	101355	Stainless steel	25 PCS / 150 BUN

Stop profile for interior plaster and exterior render

Aluminium plaster stop profile with white base coating for interior and exterior plasters of 10 mm and thicker.

Colour: 10 - white
Stainless steel version: 2178




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9111	10 mm	250	107584	Aluminum, with basic coating	25 PCS / 144 BUN
	10 mm	300	108637	Aluminum, with basic coating	25 PCS / 144 BUN
9110	14 mm	250	107366	Aluminum, with basic coating	25 PCS / 120 BUN

Stop profile for interior plaster and exterior render

Stainless steel plaster stop profile for interior and exterior plasters of 20 mm and thicker and tile thicknesses up to 19.5 mm.

Angular position: 90°



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2233	20 mm	300	101363	Stainless steel	25 PCS / 120 BUN

BASE PROFILES CORROSION PROTECTION


Base stop profile for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 8 mm and thicker.

Angular position: 110°



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2184	8 mm	250	102501	Stainless steel	20 PCS / 200 BUN




Base stop profile for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 12 mm and thicker.

Angular position: 110°



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2225	12 mm	300	101331	Stainless steel	25 PCS / 56 BUN



Base stop profile for interior plaster and exterior render

Aluminium base profile with white base coating for interior and exterior plasters of 12 mm and thicker.


Colour: 10 - white

Angular position: 110°

Stainless steel version: 2225



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9125	12 mm	300	107180	Aluminum, with basic coating	25 PCS / 48 BUN




Base stop profile for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 15 mm and thicker.

Angular position: 110°



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2229	15 mm	300	101335	Stainless steel	25 PCS / 48 BUN




Base stop profile for interior plaster and exterior render

Base stop profile for exterior render 15mm, Aluminium-white primed.

Angular position: 110°



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9229	15 mm	300	119195	Aluminum, with basic coating	25 PCS / 48 BUN




Base stop profile for interior plaster and exterior render

Stainless steel corner profile for interior and exterior plasters of 20 mm and thicker.

Angular position: 105°



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2230	20 mm	300	108910	Stainless steel	25 PCS / 120 BUN



PVC PROFILES


Y-Corner bead for interior plaster and exterior render

PVC corner profile for plaster thicknesses of 6 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
38406	6 mm	260	118548	Hard PVC	20 PCS / 15 BOX
	6 mm	300	117890	Hard PVC	20 PCS / 15 BOX
38408	8 mm	260	118549	Hard PVC	20 PCS / 15 BOX
	8 mm	300	117893	Hard PVC	20 PCS / 15 BOX



Y-Corner bead for interior plaster and exterior render

PVC corner profile for plaster thicknesses of 6 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.

Colour: 10 - white


Notes:
Only profile head white, cleaning leg grey.



NEW

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37406	6 mm	260	118545	Hard PVC	20 PCS / 15 BOX
	6 mm	300	117869	Hard PVC	20 PCS / 15 BOX
37408	8 mm	260	118546	Hard PVC	20 PCS / 15 BOX
	8 mm	300	117872	Hard PVC	20 PCS / 15 BOX

NEW



Y-Corner bead for interior plaster and exterior render

PVC corner profile for plaster thicknesses of 10 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.


Colour: 10 - white

Notes:
With head perforation.



NEW

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
38410	10 mm	260	118550	Hard PVC	20 PCS / 15 BOX
	10 mm	300	117895	Hard PVC	20 PCS / 15 BOX
38414	14 mm	260	118551	Hard PVC	20 PCS / 15 BOX
	14 mm	300	117897	Hard PVC	20 PCS / 15 BOX



Y-Corner bead for interior and exterior plater

PVC corner profile for plaster thicknesses of 10 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.

Colour: 10 - white


Notes:
Only profile head white, cleaning leg grey, with perforated head.



NEW

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37410	10 mm	260	118544	Hard PVC	20 PCS / 15 BOX
	10 mm	300	117876	Hard PVC	20 PCS / 15 BOX
37414	14 mm	260	118547	Hard PVC	20 PCS / 15 BOX
	14 mm	300	117881	Hard PVC	20 PCS / 15 BOX


NEW



Y-Corner bead for interior plaster and exterior render

Asymmetrical PVC corner profile for plaster thicknesses of 10 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.

Colour: 10 - white



NEW

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
38510	10 mm	260	118552	Hard PVC	20 PCS / 15 BOX
	10 mm	300	117899	Hard PVC	20 PCS / 15 BOX
38514	14 mm	260	118553	Hard PVC	20 PCS / 15 BOX
	14 mm	300	117901	Hard PVC	20 PCS / 15 BOX

NEW

Stop profile for interior and exterior render

Plaster stop profile made of PVC for interior and exterior plaster from 3 mm.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37921	3 mm	250	115445	Hard PVC	50 PCS / 64 BOX
37922	6 mm	250	116015	Hard PVC	50 PCS / 64 BOX
37923	8 mm	250	116016	Hard PVC	50 PCS / 64 BOX
37924	10 mm	250	116017	Hard PVC	50 PCS / 64 BOX
37925	14 mm	250	116018	Hard PVC	50 PCS / 64 BOX


Stop profile for interior plaster and exterior render

White PVC stop profile for plaster thicknesses of 6 mm and greater. For all types of plaster and mortar. For creating precise flush and aligned on the edges of buildings.

Colour: 10 - white

Notes:

Only visible side white, plaster leg grey.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37420	6 mm	250	117882	Hard PVC	25 PCS / 64 BOX
37422	10 mm	250	117884	Hard PVC	25 PCS / 64 BOX
37424	14 mm	250	117886	Hard PVC	25 PCS / 64 BOX

Base stop profile for interior plaster and exterior render

White PVC base profile for plaster thicknesses of 6,0 mm and greater. For all types of plaster and mortar. With an inside angle of 110°. For creating precise flush and aligned on the edges of buildings.


Colour: 10 - white


Angular position: 110°

Notes:

Only visible side white, plaster leg grey.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37430	6 mm	250	117883	Hard PVC	25 PCS / 64 BOX
37432	10 mm	250	117887	Hard PVC	25 PCS / 64 BOX
37434	14 mm	250	117888	Hard PVC	25 PCS / 64 BOX



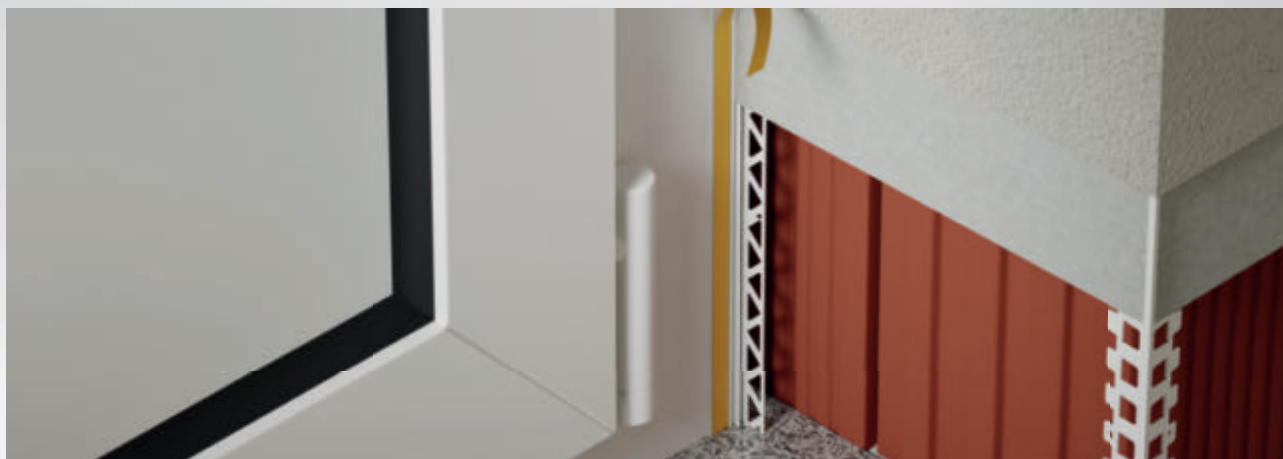

GENERAL INFORMATION

- Protektor offers plastering beads and plaster sealing beads in various designs for a secure, durable and visually clean connection of windows, doors and other components to plaster and external thermal insulation composite systems. They fulfil the function of a pulling aid for the plaster, sealing the connection and absorbing movements.
- They consist of a PVC profile body, a tear-off adhesive flap (tear-off flap) and a self-adhesive, closed-cell foam tape. Protektor plastering strips have a U-shaped profile body to accommodate the plastering system. Protektor plaster sealing strips also have a plaster leg for optimum plaster adhesion and, especially for use in thermal insulation composite systems, an additional strip of alkali-resistant glass fibre fabric (in accordance with ETAG 004).
- All Protektor plastering strips and plaster sealing strips are tested and classified in the movement classes in accordance with the VDPM data sheet and the SAF guideline (see below). Corresponding test certificates are available at www.protektor.de.
- The selection of suitable Protektor plastering beads or plaster sealing beads for thermal insulation composite systems, exterior and interior plasters depends on the installation situation and size of windows and doors as well as the required movement class in the connection area in order to permanently ensure the required protection against driving rain. The selection tables on the following two pages allow for easy product selection.
- When connecting to roller shutter guide rails, ensure that the rail itself is sufficiently fixed and secured. We generally recommend our Protektor ProLine membrane plaster sealing strips. Plastering strips without plaster legs are generally not suitable as connections on roller shutter guide rails
- Cut PVC profiles to the required installation dimensions using suitable PVC scissors (e.g. Protektor profile scissors).
- Plastering strips/plaster sealing strips with self-adhesive foam tape are glued plumb and level to the substrate and pressed down firmly. The bonding area must generally be dry, clean, free of frost, dust and grease and sufficiently load-bearing. A bonding test must always be carried out to assess the suitability of the adhesive.
- Extending plastering strips without plaster legs by butting is not permitted. When butt-joining plaster sealing strips (with plaster legs), the joint must generally be positioned in the upper third of the reveal. Profile and mitre joints must be backed with Compriband.
- To make it easier to remove the tear-off strip later, it is recommended to remove it approx. 1 to 2 cm wide in the area of the connection before setting the plastering bead or plaster sealing bead.

- The permissible air and component temperature during application is between +5°C and +40°C.
- Existing plaster strips must be completely backfilled and covered. Do not plaster or paint over the visible PVC strip, clean immediately after plastering.
- The tear-off adhesive flap for attaching a protective film should only be removed after the final coat has been applied.
- Store all profiles in a dry place! PVC profiles should also be stored in a cool, frost-free, horizontal and flat place.

The regulations, recommendations and system approvals of the render and system manufacturers and the other trades involved in the construction work must always be observed. In addition, all standards and guidelines on the subject of rendering and ETICS in their current version must be observed, in particular DIN 55699, Ö-Norm B6400 and the guidelines and leaflets of the associations:

- Information sheet „Formation of details with profiles and joint sealing tapes for external rendering and ETICS“ from the Association for Insulation Systems, Render and Mortar (VDPM)
- Guideline „Connections to windows and roller shutters with plaster, external thermal insulation composite systems and drywall construction“ from the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF), the Fachverband Glas, Fenster, Fassade Baden-Württemberg and the Bundesverband Rollläden + Sonnenschutz e. V.
- „Processing guidelines for plastering and finishing profiles“ from the Austrian Plastering Working Group (ÖAP)
- „Processing guideline for external thermal insulation composite systems“ of the Austrian Quality Group for Thermal Insulation Systems (QG)

The product information as well as the additional information in the respective product illustrations in this catalogue and the further information in our product data sheets and processing instructions on our website must be observed! When selecting plastering strips and plaster sealing strips, please refer to the corresponding selection tables in this catalogue according to movement classes and areas of application, as well as the complete information on selection, processing and installation on our website.

PROFILE SELECTION

PLASTER- AND PLASTER SEALING BORDERS



Classification of motion absorption capacity according to VPDM leaflet/SAF guideline

Movement class	A	B	C	D	E
Stretch	≥ 3,5 mm	≥ 3 mm	≥ 2 mm	≥ 1 mm	No requirement for motion absorption
Compression	≥ 2 mm	≥ 1,5 mm	≥ 1,5 mm	≥ 1 mm	
Shear transverse (both sides)	≥ 2 mm	≥ 1,5 mm	≥ 1 mm	≥ 1 mm	
Shear longitudinal (both sides)	≥ 2 mm	≥ 1,5 mm	≥ 1 mm	≥ 1 mm	

Position in relation to masonry		centered		flush	orset
external rendering					
		Window/door size	≤ 2,6m² ≤ 6m² ≤ 10m²		
		Movement class Connection ²⁾	Class D Class C Class B		
		Art.Nr.	Profile Width		

Standard plastering borders in U-shape

37103	6 mm	✓ ¹⁾		
37104	9 mm	✓ ¹⁾		
3711 Neu	10 mm	✓ ¹⁾	✓ ¹⁾	
37111	6 mm	✓ ¹⁾	✓ ¹⁾	
3712 / 37129	10 mm	✓ ¹⁾	✓ ¹⁾	
Standard plastering borders in U-shape with hollow chamber				
3726 Neu	9 mm	✓ ¹⁾	✓ ¹⁾	
3727	12 mm	✓ ¹⁾	✓ ¹⁾	
BasicLine Plaster sealing borders with perforated plaster leg				
37606 / 37806	6 mm	✓	✓	
37609 / 37809	9 mm	✓	✓	
37706 / 37906	6 mm	✓	✓	
37709 (37729 ⁴⁾) / 37909 (37929 ⁴⁾)	9 mm	✓	✓	
37719 (37720 ⁴⁾)	9 mm	✓	✓	
ProLine Membrane-Plaster sealing borders with perforated plaster leg				
38610 / 38810	10 mm	✓	✓	✓
38614 / 38814	14 mm	✓	✓	✓
38807	7 mm	✓	✓	✓
TopLine-Plaster sealing borders with plaster leg				
39828	28 mm	✓	✓	✓

Special solution,
object-specific planning
required

Plaster connections for
windows in front
not executable

1) Applies up to an edge or reveal length of 2.6 m.

2) The specified „movement classes connection“ are minimum requirements for the respective installation situation and window/door size.

3) By depositing a sufficiently dimensioned and placed pre-compressed sealing tape, the SAF resp. VPDM movement class A / Önorm B6400 class III can be achieved. The strip then serves only as a peel-off aid.

4) Color anthracite

PROFILE SELECTION

PLASTER- AND PLASTER SEALING BORDERS



Position in relation to masonry		centered			flush			orset		
WDVS										
Window/door size		≤ 2,6m ²	≤ 6m ²	≤ 10m ²	≤ 2,6m ²	≤ 6m ²	≤ 10m ²	≤ 2,6m ²	≤ 6m ²	≤ 10m ²
Movement class connection ²⁾		Class C	Class C	Class B	Class B	Class A	Class A	Class A	Class A	Class A
Art.Nr.	Profile-Width									

BasicLine³⁾ -Plaster sealing borders with plaster leg and mesh

37806 ¹⁾	6 mm	✓	✓	3)	3)	3)	3)	3)	3)	3)
37809 ¹⁾	9 mm	✓	✓							
37906 ¹⁾	6 mm	✓	✓							
37909/(37929 ¹⁾⁴⁾	9 mm	✓	✓							

ProLine-Plaster sealing borders membrane with plaster leg and mesh

38807 ¹⁾	7 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
38810 ¹⁾	10 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
38814 ¹⁾	14 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓

TopLine-Plaster sealing borders with plaster leg and fabric (can be used without adhesive test)

39622 ¹⁾	22,5 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓
---------------------	---------	---	---	---	---	---	---	---	---	---

- 1) Applies up to an edge or reveal length of 3.9 m or a maximum of 4.5 m for profiles with a bar length of 3 m.
- 2) The specified „movement classes connection“ are minimum requirements for the respective installation situation and window/door size.
- 3) By depositing a sufficiently dimensioned and placed pre-compressed sealing tape, the SAF or VDPM movement class A / Önorm B6400 class III can be achieved. The strip then serves only as a peel-off aid.
- 4) Color anthracite

Additional notes to the table

- The selection tables for ETICS apply to insulation thicknesses up to 300 mm.
- Protektor plaster sealing strips with perforated plaster leg can be used with exterior plasters in the above-mentioned installation situations mentioned above, even with colored windows without restriction (without increasing the movement class!). can be used. The functionality has been proven in cooperation with ift Rosenheim.
- When using colored metal and plastic windows, the higher movement class must be used for ETICS. (e.g. instead of class C ⇒ class B). This requirement is fulfilled for profiles of movement class A.
- Especially when working on critical substrates such as foiled plastic windows, painted wooden windows, powder-coated aluminum windows, etc., it is advisable to use a connection solution without adhesive connection (e.g. plaster sealing strip 39828 with precompressed joint sealing tape applied on site).
- In principle, all Protektor plaster sealing strips and plaster sealing strips (from movement class D) can be used for interior plasters. Plaster sealing strips with a perforated plaster leg offer more safety due to better plaster integration

Plaster end profile for interior plastering

Window sill plaster finishing profile, plaster-decoupling profile for clean finishes on the interior window sill.

Colour: 10 - white
Notes:
Contents per box:
50 pieces left, 50 pieces right



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
NEW 1458		25	10 - white	119958	ASA	100 PCE / 54 BOX

Plaster end profile for exterior plaster

Window sill plaster finishing profile, plaster-decoupling profile for clean finishes on the exterior window sill.

Colour: 10 - white
Notes:
Contents per box:
50 pieces left, 50 pieces right



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
NEW 1459		25	10 - white	119959	ASA	100 PCE / 54 BOX

Frameseal bead with shadow gap

Self-adhesive plastering strip made of PVC with shadow gap and tear-off adhesive tab for foil covering, for interior plastering and exterior rendering.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37606	6 mm	260	10 - white	111385	Rigid PVC with soft PVC	40 PCS / 36 BOX

Frameseal bead with protecting lip

Self-adhesive PVC window frame sealing bead with protective lip and detachable adhesive tab for coverage foil, for interior and exterior plaster.

Colour: 10 - white
Movement according to VDPM / SAF guideline:
Klasse C



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37706	6 mm	260	10 - white	111387	Rigid PVC with soft PVC	40 PCS / 36 BOX

SOFFIT CONNECTION PROFILES

Frame seal bead with protecting lip

Self-adhesive PVC window frame sealing bead with protective lip and detachable adhesive tab for coverage foil, for interior and exterior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37111	6 mm	260	10 - white	109681	Rigid PVC with soft PVC	30 PCS / 120 BOX
	6 mm	300	10 - white	109518	Rigid PVC with soft PVC	60 PCS / 36 BOX

Frame seal bead with shadow gap

Self-adhesive PVC window frame sealing bead with shadow joint and detachable adhesive tab for coverage foil, for interior and exterior plaster. **Colour:** 10 - white **Shadow gap:** 2 mm



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37103	6 mm	260	10 - white	112382	Hard PVC	50 PCS / 64 BOX

Frame seal bead with shadow gap

Self-adhesive PVC window frame sealing bead with shadow joint and detachable adhesive tab for coverage foil, for interior and exterior plaster. **Colour:** 10 - white **Shadow gap:** 2 mm



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37104	9 mm	260	10 - white	112384	Hard PVC	60 PCS / 36 BOX

Frame seal bead with protecting lip

Self-adhesive PVC window frame sealing bead with protective lip. Complete with elastic moving elements and detachable glue flap for foil covering, for interior and exterior plaster. **Colour:** 10 - white



NEW


Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37112	ab 9 mm	260	10 - white	118811	Rigid PVC with soft PVC	60 PCS / 36 BOX
	ab 9 mm	300	10 - white	118812	Rigid PVC with soft PVC	60 PCS / 36 BOX

SOFFIT CONNECTION PROFILES

Frameseal bead with protecting lip

Self-adhesive PVC window frame sealing bead with protective lip and detachable adhesive tab for coverage foil, for interior and exterior plaster. **Colour:** 10 - white


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37156		300	119956	6 mm	Rigid PVC with soft PVC	60 PCS / 36 BOX
		250	120336	6 mm	Rigid PVC with soft PVC	60 PCS / 36 BOX



Frameseal bead with protecting lip

Self-adhesive PVC window frame sealing bead with protective lip. Complete with elastic moving elements and detachable glue flap for foil covering, for interior and exterior plaster. **Colour:** 10 - white

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37159		300	119957	ab 9 mm	Rigid PVC with soft PVC	60 PCS / 36 BOX



Frameseal bead with flexible element, protecting lip

Self-adhesive PVC window frame sealing bead with protective lip. Complete with elastic moving elements and detachable glue flap for foil covering, for interior and exterior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
3726	9 mm	150	10 - white	116153	Rigid PVC with soft PVC	50 PCS / 36 BOX
	9 mm	230	10 - white	116154	Rigid PVC with soft PVC	50 PCS / 36 BOX
	9 mm	260	10 - white	116155	Rigid PVC with soft PVC	50 PCS / 36 BOX



Frameseal bead with shadow gap

Self-adhesive plastering strip made of PVC with shadow gap and tear-off adhesive tab for foil covering, for interior plastering and exterior rendering. **Colour:** 10 - white
Shadow gap: 3 mm



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37609	9 mm	260	10 - white	110863	Hard PVC	40 PCS / 36 BOX



SOFFIT CONNECTION PROFILES

Frameseal bead with protecting lip

Self-adhesive plastering strip made of PVC with protective lip and tear-off adhesive tab for foil covering, for interior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37709	9 mm	260	10 - white	110865	Rigid PVC with soft PVC	40 PCS / 36 BOX
	9 mm	260	91 - anthracite	114193	Rigid PVC with soft PVC	40 PCS / 36 BOX
37729	9 mm	300	91 - anthracite	114194	Rigid PVC with soft PVC	40 PCS / 36 BOX

Frameseal bead with protecting lip

Self-adhesive plastering strip made of PVC with protective lip and tear-off adhesive tab for foil covering, for interior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37719	9 mm	260	10 - white	114049	Rigid PVC with soft PVC	30 PCS / 36 BOX
	9 mm	300	10 - white	114262	Rigid PVC with soft PVC	30 PCS / 36 BOX
37720	9 mm	260	91 - anthracite	114191	Rigid PVC with soft PVC	30 PCS / 36 BOX
	9 mm	300	91 - anthracite	114192	Rigid PVC with soft PVC	30 PCS / 36 BOX

Frameseal bead with shadow gap, membrane


Self-adhesive plaster sealing strip made of PVC with shadow gap and membrane and tear-off adhesive tab for foil covering, for interior plastering and exterior rendering. **Colour:** 10 - white **Shadow gap:** 2 mm



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
38610	10 mm	260	10 - white	114730	Rigid PVC with soft PVC	35 PCS / 36 BOX
38614	14 mm	260	10 - white	114731	Rigid PVC with soft PVC	35 PCS / 24 BOX

Frameseal bead with shadow gap, membrane

Self-adhesive plaster sealing strip made of PVC with shadow gap and membrane and tear-off adhesive tab for foil covering. Profile width 13 mm for interior plastering and exterior rendering. **Colour:** 10 - white



NEW

Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
38613	13 mm	260	10 - white	119109	Rigid PVC with soft PVC	30 PCS / 50 BOX

SOFFIT CONNECTION PROFILES

Frameseal bead with shadow gap

Self-adhesive PVC window frame sealing bead with shadow joint and detachable adhesive tab for coverage foil, for interior and exterior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
3711	10 mm	260	10 - white	117814	Rigid PVC with soft PVC	60 PCS / 36 BOX

Frameseal bead with protecting lip

Self-adhesive PVC window frame sealing bead with protective lip. Complete with elastic moving elements and detachable glue flap for foil covering, for interior and exterior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
3712	10 mm	150	10 - white	115834	Rigid PVC with soft PVC	60 PCS / 36 BOX
	10 mm	230	10 - white	115836	Rigid PVC with soft PVC	60 PCS / 36 BOX
	10 mm	260	10 - white	115284	Rigid PVC with soft PVC	60 PCS / 36 BOX
	10 mm	300	10 - white	115840	Rigid PVC with soft PVC	60 PCS / 36 BOX

Frameseal flex bead with protecting lip


Self-adhesive PVC window frame sealing bead with protective lip. Complete with elastic moving elements and detachable glue flap for foil covering, for interior and exterior plaster. **Colour:** 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37129	10 mm	260	10 - white	116680	Rigid PVC with soft PVC	60 PCS / 36 BOX

Frameseal bead with protecting lip

Self-adhesive plastering strip made of PVC with protective lip and tear-off adhesive tab for foil covering. Self-adhesive foam tape, closed cell. Profile width 16 mm for interior plaster. **Colour:** 10 - white



NEW


Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37716	16 mm	260	10 - white	119105	Rigid PVC with soft PVC	30 PCS / 36 BOX

SOFFIT CONNECTION PROFILES

Frame seal bead with protecting lip, mesh

Self-adhesive plaster sealing strip made of PVC with sewn-on alkali-resistant glass fibre fabric, protective lip and tear-off adhesive tab for foil covering. Self-adhesive foam tape, closed cell. Profile with 16 mm for ETIC systems.

Colour: 10 - white



NEW

Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37916	16 mm	260	10 - white	119107	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX

Frame seal bead with shadow gap, mesh

Self-adhesive PVC window frame sealing bead with alkali-resistant fibreglass mesh, shadow joint and detachable adhesive tab for coverage foil. For heat insulation with 6-mm plaster thickness.

Colour: 10 - white

Shadow gap: 3 mm


Fabric dimension: 100 mm

Mesh size: 4 x 4 mm

Grammage: 160 g/m²

Notes:

One-sided fabric overhang of 10 cm at the end of the rod.



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37806	6 mm	260	10 - white	111389	Rigid PVC with glass fibre mesh	50 PCS / 13 BOX

Frame seal bead with protecting lip, mesh

Self-adhesive plaster sealing strip made of PVC with sewn-on alkali-resistant glass fibre fabric, protective lip and tear-off adhesive tab for foil covering. Profile with 6 mm for ETIC systems.

Colour: 10 - white


Fabric dimension: 100 mm

Mesh size: 4 x 4 mm

Grammage: 160 g/m²

Notes:

One-sided fabric overhang of 10 cm at the end of the rod.



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37906	6 mm	260	10 - white	111391	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX
	6 mm	300	10 - white	111924	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX


Frameseal bead with shadow gap, mesh

Self-adhesive plastering strip made of PVC with shadow gap and tear-off adhesive tab for foil covering. Profile width 9 mm for interior plastering and exterior rendering.

Colour: 10 - white
Shadow gap: 3 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37809	9 mm	260	10 - white	110867	Rigid PVC with glass fibre mesh	50 PCS / 13 BOX




Frameseal bead with protecting lip, mesh

Self-adhesive plaster sealing strip made of PVC with sewn-on alkali-resistant glass fibre fabric, protective lip and tear-off adhesive tab for foil covering. Profile with 9 mm for ETICS systems.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
37909	9 mm	260	10 - white	110869	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX
	9 mm	300	10 - white	111923	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX
	9 mm	300	BD - brown	112162	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX
37929	9 mm	260	91 - anthracite	114195	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX
	9 mm	300	91 - anthracite	114196	Rigid PVC with soft PVC and glass fibre mesh	50 PCS / 13 BOX




Frameseal bead with shadow gap, membrane and mesh

Self-adhesive white PVC window frame sealing bead with membrane for increased absorption of movements, with sewn alkaline resistant fibre-glass mesh, shadow joint and detachable adhesive flap for foil cover. For ETICS with render thickness starting from 6 mm and base render starting from 10 mm. Profile width 10 mm.

Colour: 10 - white
Shadow gap: 2 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
38810	10 mm	260	10 - white	114524	Rigid PVC with soft PVC and glass fibre mesh	25 PCS / 20 BOX
38814	14 mm	260	10 - white	114525	Rigid PVC with soft PVC and glass fibre mesh	25 PCS / 20 BOX




SOFFIT CONNECTION PROFILES

Frameseal bead with shadow gap, membrane and mesh

Self-adhesive white PVC window frame sealing bead with membrane for increased absorption of movements. For the lateral connection between render and roller shutter guide rails. With sewn alkaline resistant fibreglass mesh, shadow joint and detachable adhesive flap for foil cover. Profile width 7 mm, for ETICS.

Colour: 10 - white
Shadow gap: 3 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 145 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
38807	7 mm	260	10 - white	114672	Rigid PVC with soft PVC and glass fibre mesh	25 PCS / 40 BOX


Plaster sealing strip with shadow gap, fabric for ETICS

Self-adhesive plaster sealing strip made of PVC with welded-on alkali-resistant fiberglass fabric, shadow gap and tear-off adhesive tab for foil covering. Profile width 22.5 mm for ETICS systems. Sealing is done using the integrated joint sealing tape.

Colour: 10 - white
Shadow gap: 1 mm
Fabric dimension: 125 mm
Grammage: 160 g/m²
Mesh size: 4x4 mm
Notes:
Practical, maintenance-free alternative to connections with end profiles and pre-compressed joint sealing tapes.



Item number	Plaster thickness (mm)	Length (cm)	Colour	Order number	Material	Package/ Large pack
39622	6 mm	240	10 - white	120093	Rigid PVC with glass fibre mesh	25 PCE / 20 BOX

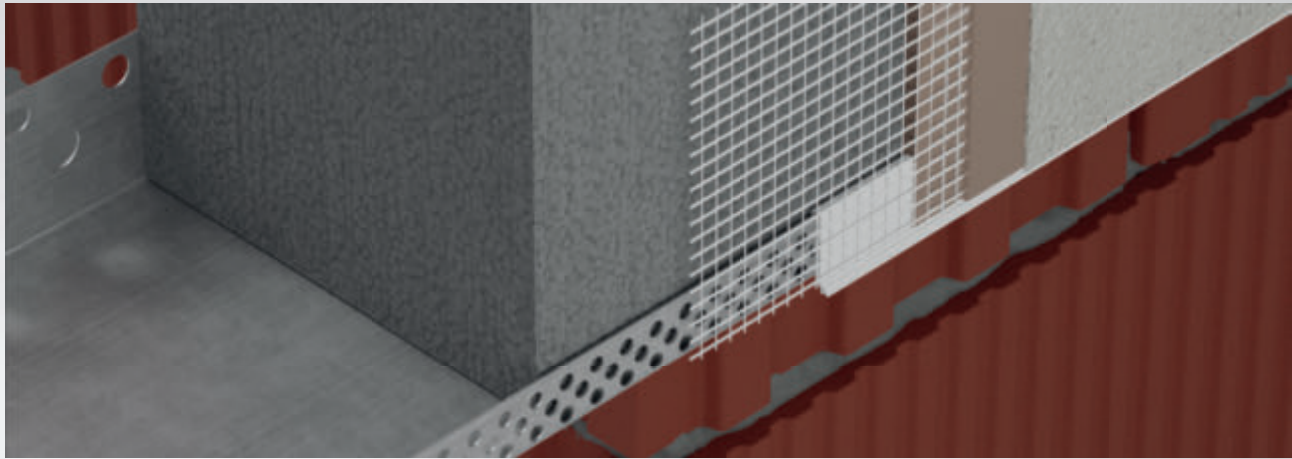

GENERAL INFORMATION

- Für For thermal insulation, Protektor offers a large portfolio of profiles for optimal, safe and durable detailed solutions on the thermally insulated exterior façade. The profiles for external thermal insulation composite systems (ETICS) are mainly made of PVC with glass-fibre fabric (according to ETAG004) or of aluminum. Profiles made of galvanized steel with PVC coating are used for thermal insulation plasters.
- Basically, the regulations, recommendations and system approvals of the plaster and system manufacturers as well as the other trades involved in the construction must be observed.
- Cut PVC profiles to the required installation dimension using suitable PVC shears (e.g. Protektor profile shears). Cut metal profiles with hand shears or a suitable cutting disc. Only process stainless steel profiles with rustproof tools and cut them with a cutting disc recommended for stainless steel.
- Plaster sealing strips with self-adhesive foam tape are glued to the substrate plumb and flush. The bonding area must generally be dry, clean, free of frost, dust and grease and have sufficient load-bearing capacity. To assess the suitability for bonding, a bonding test must generally be carried out.
- The profiles and, if necessary, the glass-fibre fabric strip are applied to the insulation surface over the entire surface with system reinforcement mortar and additionally covered completely up to the front edge of the profile with surface fabric.
- If profile joints are required, overlap any existing fabric protrusions. All profile joints must be completely covered with at least 10 cm of surface fabric.
- The tear-off adhesive tab for applying a protective film should only be removed after application of the finishing coat.
- Do not plaster over visible PVC surfaces, clean immediately after plastering.
- Aluminum base profiles with projections ≥ 80 mm must be temporarily secured against tilting for installation of the first insulation board row.
- Elastic middle parts of expansion joint profiles and metal surfaces that remain visible must be masked off before plastering. The masking strip must be removed immediately after plastering.
- Store all profiles in a dry place! Additionally, store PVC profiles in a cool and frost-free place, horizontally and lying flat.

All standards and guidelines on the subject of plaster and ETICS in their current version must be observed, in particular DIN 55699, Ö-Norm B6400 as well as the guidelines and leaflets of the associations:

- Guideline „Fassadensockelputz / Außenanlagen“ from the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF) and other associations.
- Guideline „Metal Connections to Plaster, External Thermal Insulation and External Thermal Insulation Composite Systems“ from the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF) and other associations.
- Guideline „Connections to windows and roller shutters in plaster, external thermal insulation composite systems and drywall construction“ by the Fachverband der Stuckateure für Ausbau und Fassade Baden-Württemberg (SAF), the Fachverband Glas, Fenster, Fassade Baden-Württemberg and the Bundesverband Rollläden + Sonnenschutz e. V.
- Leaflet „Formation of details with profiles and joint sealing tapes for external rendering and ETICS“ from the Association for Insulation Systems, Plaster and Mortar (VDPM)
- „Processing Guideline for Plastering and Finishing Profiles“ by the Austrian Working Group for Plaster (ÖAP)
- „Processing Guideline for External Thermal Insulation Composite Systems“ of the Austrian Quality Group for Thermal Insulation Systems (QG)

The product information as well as the additional information with the respective product illustrations in this catalogue and the further notes in our product data sheets and processing instructions on our homepage must be observed!

For the selection of the plastering strips and plastering sealing strips, the corresponding selection tables according to movement classes and areas of application in this catalogue must be observed, as well as the complete instructions for selection, processing and installation on our homepage.




CORNER PROFILES

Corner bead with mesh and hood for thermal insulation

Corner bead with mesh made of rigid PVC, with sealing edge and alkali-resistant fibreglass mesh, for heat insulation with plaster thicknesses of 3 mm and greater.

Colour: 10 - white
Fabric dimension: 100/150 mm
Mesh size: 4 x 4 mm
Grammage: 145 g/m²




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
NEW 37521	3 mm	250	119418	Hard PVC	100/150 mm	50 PCS / 8 BOX
NEW 37524	6 mm	250	109634	Hard PVC	100/150 mm	50 PCS / 15 BOX
	6 mm	250	119420	Hard PVC	100/150 mm	50 PCS / 8 BOX

Stop profile for insulation

Stop profile for different insulation thicknesses.

Material thickness: 0,8 mm
color value: 10 - white


Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
NEW 92422		250	119508	Aluminum, with basic coating	10 PCS / 100 BUN
NEW 92424		250	119507	Aluminum, with basic coating	10 PCS / 56 BUN
NEW 92426		250	119506	Aluminum, with basic coating	10 PCS / 40 BUN
NEW 92428		250	119505	Aluminum, with basic coating	10 PCS / 32 BUN
NEW 92430		250	119504	Aluminum, with basic coating	10 PCS / 24 BUN



Corner bead with mesh and hood for thermal insulation

Corner bead with mesh made of rigid PVC, with sealing edge and alkali-resistant fibreglass mesh, for heat insulation with plaster thicknesses of 6 mm and greater.

Colour: 10 - white
Fabric dimension: 80/120 mm
Mesh size: 4 x 4 mm
Grammage: 145 g/m²




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
NEW 37523	6 mm	250	109635	Hard PVC	80/120 mm	50 PCS / 15 BOX
	6 mm	250	119419	Hard PVC	80/120 mm	50 PCS / 8 BOX

Corner bead with mesh and hood for thermal insulation

Corner bead with mesh made of rigid PVC, with sealing edge and alkali-resistant fibreglass mesh, for heat insulation with plaster thicknesses of 10 mm and greater.

Colour: 10 - white
Fabric dimension: 100/150 mm
Mesh size: 4 x 4 mm
Grammage: 145 g/m²
Notes:
With head perforation.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
NEW 37525	10 mm	250	110675	Hard PVC	100/150 mm	25 PCS / 15 BOX
	10 mm	250	119421	Hard PVC	100/150 mm	25 PCS / 8 BOX
NEW 37526	14 mm	250	110673	Hard PVC	100/150 mm	25 PCS / 8 BOX
	14 mm	250	119422	Hard PVC	100/150 mm	25 PCS / 8 BOX


CORNER PROFILES

Corner bead with mesh for thermal insulation

Corner bead with mesh made of rigid PVC with alkali-resistant fibreglass mesh, for heat insulation.

Colour: 10 - white
Fabric dimension: 100/230 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
37968	250	108166	Rigid PVC with glass fibre mesh	100/230 mm	50 PCS / 23 BOX
37969	250	109504	Rigid PVC with glass fibre mesh	100/300 mm	50 PCS / 24 BOX




Corner bead with mesh for thermal insulation

Corner bead with mesh made of rigid PVC, with alkali-resistant fibreglass mesh, for heat insulation.

Colour: 10 - white
Fabric dimension: 100/150 mm
Mesh size: 4 x 4 mm
Grammage: 145 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
3797	250	111694	Rigid PVC with glass fibre mesh	100/150 mm	100 PCS / 15 BOX
3799	250	111697	Rigid PVC with glass fibre mesh	80/120 mm	100 PCS / 15 BOX




Corner bead with mesh for thermal insulation

Aluminium corner bead with mesh, with alkali-resistant fibreglass mesh, for heat insulation.

Mesh size: 4 x 4 mm
Grammage: 145 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
9075	250	113732	Aluminum natural	100/150 mm	50 PCS / 48 BOX



Glass fibre mesh corner bead for thermal insulation

Corner bead with mesh gauge made of alkali resistant armoured fibre, for use on outside and inside corners.

Colour: 10 - white
Fabric dimension: 80/120 mm
Mesh size: 18 x 20 mm
Grammage: 320 g/m²
Notes:
Suitable for flame-retardant thermal insulation!

Item number	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
1092	260	102309	Alkali-resistant glass fibre mesh	80/120 mm	50 PCS / 24 BOX



CORNER PROFILES

Glass fibre mesh corner bead for thermal insulation

Corner bead with mesh made of alkali-resistant armoured fibre for use on outside and inside corners.

Colour: 10 - white
Fabric dimension: 90/70 mm
Mesh size: 18 x 7 mm
Grammage: 280 g/m²
Notes:
Suitable for flame-retardant thermal insulation!




Item number	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
1096	5,000	113667	Alkali-resistant glass fibre mesh	90/70 mm	1 ROL / 80 BOX

Flexible corner bead with mesh for thermal insulation

Variable PVC corner bead with mesh, with alkali-resistant fibreglass mesh, for heat insulation.

Colour: 10 - white
Fabric dimension: 90/110 mm
Mesh size: 4 x 4 mm
Grammage: 145 g/m²
Notes:
The "crease fold" enables the variable formation of acute to obtuse-angled edges (e.g. 135° edges).




Item number	Length (cm)	Order number	Material	Fabric dimension	Package/ Large pack
3752	5,000	105505	Hard PVC	90/110 mm	1 ROL / 20 BOX

Corner bead with mesh for thermal insulation

PVC corner bead with mesh with alkali-resistant fibreglass mesh for creating exact edges in thermal insulation systems. White glass fibre mesh with black imprint "PROTEKTOR".

Mesh size: 4 x 4 mm
Grammage: 145 g/m²




Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37976		250	112302		PVC	100 PCS / 15 BOX

Stop profile with mesh for thermal insulation

Plaster stop profiles made of PVC, with sewn attached alkali-resistant fiberglass mesh, for plaster thicknesses of 3 mm and greater applied to heat insulation.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3793		250	111532	3 mm	Rigid PVC with glass fibre mesh	50 PCS / 40 BOX
3796		250	111531	6 mm	Rigid PVC with glass fibre mesh	50 PCS / 40 BOX
37098		250	111928	8 mm	Rigid PVC with glass fibre mesh	50 PCS / 40 BOX
3791		250	112024	10 mm	Rigid PVC with glass fibre mesh	40 PCS / 40 BOX
37914		250	111927	14 mm	Rigid PVC with glass fibre mesh	40 PCS / 40 BOX




Stop profile for thermal insulation

Aluminium box-shaped stop profile for thermal insulation systems with different insulation thicknesses (a).

Notes:
Vertical installation only!

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
93304	40	250	109019		Aluminum natural	10 PCS / 80 BUN
93305	50	250	109020		Aluminum natural	10 PCS / 70 BUN
93306	60	250	109021		Aluminum natural	10 PCS / 60 BUN
93308	80	250	109023		Aluminum natural	10 PCS / 60 BUN
93310	100	250	109025		Aluminum natural	10 PCS / 48 BUN
93312	120	250	109026		Aluminum natural	10 PCS / 40 BUN
93314	140	250	109027		Aluminum natural	6 PCS / 66 BUN
93316	160	250	109028		Aluminum natural	6 PCS / 50 BUN




Stop profile for thermal insulation for roof ventilation

Aluminium corner profile with white case coating for installation between the rafters, providing DIN-conform roof ventilation.

Colour: 10 - white
Ventilation area: 207 cm²/lfm.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9224	13 mm	250	101992	Aluminum, with basic coating	20 PCS / 70 BUN




DRIP EDGE PROFILES

Water drip nose profile for thermal insulation

Water drip nose profiles for achieving a clean finish in insulated attic constructions or balcony sub-layers, e.g. for insulated passageways, balcony and window lintel undersides with different plaster thicknesses (a). Plastering leg with sewn alkali-resistant glass fiber fabric strip.

Colour: 10 - white
Fabric dimension: 100/100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3794		250	114609	6 mm	Rigid PVC with glass fibre mesh	25 PCS / 13 BOX
37941		250	114617	10 mm	Rigid PVC with glass fibre mesh	25 PCS / 13 BOX
37942		250	114618	14 mm	Rigid PVC with glass fibre mesh	20 PCS / 13 BOX



Water drip nose profile for thermal insulation

Water drip profiles for achieving a clean finish in insulated attic constructions or balcony sub-layers.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9011		250	101936	6 mm	Aluminum natural	20 PCS / 47 BUN
2154		250	101411	6 mm	Stainless steel	20 PCS / 49 BUN




Water drip nose profile for transitions from render to ETIC

Drip edge profile made of PVC with sewn-on alkali-resistant fiberglass fabric for the transition from plasters with a thickness of 14 mm or more to WDV systems with a plaster thickness of 6 mm or more. To produce clean finishes, e.g. B. for insulated passages, balcony and window lintel soffits.

Colour: 10 - white
Fabric dimension: 100/100 mm
Mesh size: 7 x7 mm/ bzw. 4 x 4 mm
Grammage: 180 / 165 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
NEW 37945		250	119416	6 mm	Rigid PVC with glass fibre mesh	20 PCS / 13 BOX




CONNECTING PROFILES

Window sill connection profile for sealing foils

Window sill connection profile made of PVC with sewn-on alkali-resistant glass fiber fabric for ETICS systems. With closed legs for sticking a sealing film as a second sealing level below the window sill.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37127	6 mm	250	116989	Rigid PVC with glass fibre mesh	15 PCS / 13 BOX




Metal sheet connecting profile for thermal insulation

PVC metal connection profile with sewn alkali-resistant fibreglass mesh, for creating sheet metal coverings with a plaster thickness of 8 mm on thermal insulation systems.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3749		250	116913	8 mm	Rigid PVC with glass fibre mesh	20 PCS / 40 BOX




Window sill connection profile for sealing slurry

Window sill connection profile made of PVC with sewn-on alkali-resistant glass fiber fabric for ETICS systems. Additionally with sewn-on alkali-resistant glass fiber fabric for embedding in a sealing slurry as a second sealing level below the window sill.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37128	6 mm	250	116990	Rigid PVC with glass fibre mesh	15 PCS / 13 BOX




Attica profile for ETICS

White PVC stop profile for plaster thicknesses of 7 mm and greater. For all types of plaster and mortar. With a sealing edge to create precise flush and aligned on the edges of buildings.

Colour: 10 - white
Notes:
Only visible side white, plaster leg grey.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37207		250	119452	7 mm	Hard PVC	30 PCS / 13 BOX

NEW




BASE PROFILES

Base profile for thermal insulation

Aluminium base profile for thermal insulation systems with different insulation thicknesses (a).

Material thickness: 0,6 mm
Height (b): 35 mm

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
90602	20	250	108807		Aluminum natural	10 PCS / 72 BUN
90603	30	250	108826		Aluminum natural	10 PCS / 120 BUN
90604	40	250	108825		Aluminum natural	10 PCS / 96 BUN
90605	50	250	108824		Aluminum natural	10 PCS / 90 BUN
90606	60	250	108823		Aluminum natural	10 PCS / 91 BUN
90607	70	250	108822		Aluminum natural	10 PCS / 84 BUN
90608	80	250	108806		Aluminum natural	10 PCS / 66 BUN
90609	90	250	108805		Aluminum natural	10 PCS / 60 BUN
90610	100	250	108783		Aluminum natural	10 PCS / 63 BUN
SALE 90616	160	250	108780		Aluminum natural	6 PCS / 48 BUN




Base profile for thermal insulation

Aluminium base profile for thermal insulation systems with different insulation thicknesses (a).

Material thickness: 0,8 mm
Height (b): 35 mm



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
90804	40	250	108811		Aluminum natural	10 PCS / 96 BUN
90805	50	250	108810		Aluminum natural	10 PCS / 84 BUN
90806	60	250	108809		Aluminum natural	10 PCS / 78 BUN
90808	80	250	108793		Aluminum natural	10 PCS / 66 BUN
90810	100	250	108760		Aluminum natural	10 PCS / 54 BUN
90811	110	250	108759		Aluminum natural	6 PCS / 60 BUN
NEW 90812	120	250	119201		Aluminum natural	6 PCS / 70 BUN
NEW 90814	140	250	119212		Aluminum natural	6 PCS / 56 BUN
NEW 90816	160	250	119220		Aluminum natural	6 PCS / 56 BUN
NEW 90818	180	250	119236		Aluminum natural	6 PCS / 42 BUN
NEW 90820	200	250	119253		Aluminum natural	6 PCS / 39 BUN




BASE PROFILES

Base profile for thermal insulation

Aluminium base profile for thermal insulation systems with different insulation thicknesses (a).

Material thickness: 1 mm
Height (b): 35 mm




	Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
	91010	100	250	108772		Aluminum natural	10 PCS / 54 BUN
NEW	91012	120	250	119264		Aluminum natural	6 PCS / 70 BUN
	91013	130	250	109540		Aluminum natural	6 PCS / 48 BUN
NEW		130	250	119269		Aluminum natural	6 PCS / 56 BUN
NEW	91014	140	250	119271		Aluminum natural	6 PCS / 56 BUN
	91015	150	250	119276		Aluminum natural	6 PCS / 52 BUN
NEW	91016	160	250	119277		Aluminum natural	6 PCS / 48 BUN
	91018	180	250	119282		Aluminum natural	6 PCS / 39 BUN
NEW	91020	200	250	119286		Aluminum natural	6 PCS / 39 BUN
NEW	91022	220	250	119289		Aluminum natural	6 PCS / 39 BUN

Base profiles for thermal insulation

Aluminium base profile, two-part, for thermal insulation systems with insulation thicknesses of 200-300 mm.

Height (b): 42 mm
Material thickness: 1,5 mm




	Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
	9141	ab 200	250	105835		Aluminum natural	4 PCS / 20 BUN

Corved wall connecting profile

Wall bracket made of embossed aluminum with a leg length of 50 mm as a lower support. Insulation material thickness at least 50 mm.

	Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
	95631	50	250	109144		Aluminum	15 PCS / 90 BUN
	95632	90	250	109145		Aluminum	15 PCS / 90 BUN
	95633	200	250	109146		Aluminum natural	15 PCS / 90 BUN



Connecting element

Connection pieces for box-shaped render profiles.




	Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
	3756		3	102259		Hard PVC	100 PCE / 25 BAG

BASE PROFILES

Mounting set ETICX

Assembly set comprised of 50 levelling pieces (3 mm), 75 dowels (6 x 60 mm) and 10 connection pieces (3756) for box-shaped render profiles.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3757		20	102264			1 PCE / 240 BOX




Clip-on profile for thermal insulation

Box-shaped stainless steel clip-on profiles, for exterior plaster, used to mount or attach to base profiles.




Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
2134		250	101340	6 mm	Stainless steel	20 PCS / 196 BUN
2130		250	101325	10 mm	Stainless steel	20 PCS / 156 BUN
2132		250	101334	15 mm	Stainless steel	20 PCS / 132 BUN



Clip-on profile for thermal insulation

Box-shaped aluminium clip-on profile, for exterior plaster, for mounting or attaching to base profiles.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9124		250	103661	6 mm	Aluminum natural	20 PCS / 200 BUN
9121		250	103662	10 mm	Aluminum natural	20 PCS / 156 BUN
9122		250	102465	15 mm	Aluminum natural	20 PCS / 108 BUN




Clip-on profile for thermal insulation

PVC clip-on render stop profile for heat insulation systems with a plaster thickness of 6 mm, with drip edge. Plastering leg made of alkali-resistant fibreglass mesh strips.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37300		250	119189	6 mm	Rigid PVC with glass fibre mesh	15 PCS / 24 BOX
37301		250	119190	10 mm	Rigid PVC with glass fibre mesh	15 PCS / 24 BOX
37302		250	119191	14 mm	Rigid PVC with glass fibre mesh	15 PCS / 24 BOX




Clip-on profile for thermal insulation

PVC clip-on profile for thermal insulation systems, for 6 mm plaster thickness with sewn alkali-resistant fibreglass mesh. Also suitable for attaching to the edging profile of the apron of roller shutter and Venetian blind boxes.

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37400		250	112324	6 mm	Rigid PVC with glass fibre mesh	15 PCS / 40 BOX
37404		250	112327	8 mm	Rigid PVC with glass fibre mesh	15 PCS / 40 BOX
37401		250	112325	10 mm	Rigid PVC with glass fibre mesh	15 PCS / 40 BOX
37402		250	112326	14 mm	Rigid PVC with glass fibre mesh	15 PCS / 40 BOX




Insertion profile with drip nose for thermal insulation

PVC insertion base profile, for 6 mm plaster thickness, with drip edge. Plastering leg with sewn alkali-resistant glass fiber fabric strip.

Colour: 10 - white
Leg length: 60/40 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Suitable for product: 37539; 37537; 37538
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37500	ab 40	200	114908	6 mm	Rigid PVC with glass fibre mesh	15 PCS / 25 BOX




Insertion profile with drip nose for thermal insulation

PVC insertion base profile, for 6 mm plaster thickness, with drip edge. Plastering leg with sewn alkali-resistant glass fiber fabric strip.

Colour: 10 - white
Leg length: 60/30 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Suitable for product: 37539; 37537; 37538
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37530	ab 30	200	115315	6 mm	Rigid PVC with glass fibre mesh	15 PCS / 13 BOX




Insertion profile with drip nose for thermal insulation

PVC insertion base profile, for 6 mm plaster thickness, with drip edge. Plastering leg with sewn alkali-resistant glass fiber fabric strip.

Colour: 10 - white
Leg length: 100/80 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Suitable for product: 37539; 37537; 37538
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37501	ab 80	200	114909	6 mm	Rigid PVC with glass fibre mesh	15 PCS / 25 BOX




BASE PROFILES

Insertion profile with drip nose for thermal insulation

PVC insertion base profile, for 6 mm plaster thickness, with drip edge. Plastering leg with sewn alkali-resistant glass fiber fabric strip.

Colour: 10 - white
Leg length: 60/40 mm
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Suitable for product: 37539; 37537; 37538
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37503	ab 40	200	114910	10 mm	Rigid PVC with glass fibre mesh	10 PCS / 25 BOX




Mounting angle ETICS

PVC angle profile use as bottom bad for insulation material.

Colour: 10 - white
Leg length: 40 mm
Suitable for product: 37503; 37501; 37500; 37530
Notes:
Thermal bridges minimised.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37537	ab 40	200	115338		Hard PVC	15 PCS / 36 BOX




Mounting angle ETICS

PVC angle profile use as bottom bad for insulation material.

Colour: 10 - white
Leg length: 100 mm
Suitable for product: 37503; 37501; 37500; 37530
Notes:
Thermal bridges minimised.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37538	ab 100	200	115339		Hard PVC	15 PCS / 40 BOX




Mounting angle ETICS

PVC angle profile use as bottom bad for insulation material.

Colour: 10 - white
Leg length: 160 mm
Suitable for product: 37503; 37501; 37500; 37530
Notes:
Thermal bridges minimised.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37539	ab 160	200	115340		Hard PVC	15 PCS / 30 BOX




Floor connection profile for thermal insulation

Connection profile with drip edge for thermal insulation from 60/6 mm, for inserting connections between thermal insulation and e.g. existing coverings, hard PVC, alkali-resistant fabric

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37520	ab 30	200	116008	6 mm	Rigid PVC with glass fibre mesh	10 PCS / 25 BOX




Base profile for thermal insulation

Base profile made of PVC, with sewn attached alkali-resistant fiberglass mesh, for plaster thicknesses of 6 mm and greater applied to heat insulation,

Colour: 10 - white
Fabric dimension: 100 mm
Mesh size: 4 x 4 mm
Grammage: 160 g/m²
Notes:
One-sided fabric overhang of 10 cm at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37964		250	115169	6 mm	Rigid PVC with glass fibre mesh	50 PCS / 40 BOX




Stop profile for insulation

Stop profile for different insulation thicknesses.

Material thickness: 0,8 mm

	Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
NEW	92322	20	250	119513	Aluminum natural	10 PCS / 100 BUN
NEW	92324	40	250	119512	Aluminum natural	10 PCS / 56 BUN
NEW	92326	60	250	119511	Aluminum natural	10 PCS / 40 BUN
NEW	92328	80	250	119510	Aluminum natural	10 PCS / 32 BUN
NEW	92330	100	250	119509	Aluminum natural	10 PCS / 24 BUN




Stop profile for insulation

Stop profile for different insulation thicknesses.

Material thickness: 0,8 mm
color value: 10 - white

	Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
NEW	92422		250	119508	Aluminum, with basic coating	10 PCS / 100 BUN
NEW	92424		250	119507	Aluminum, with basic coating	10 PCS / 56 BUN
NEW	92426		250	119506	Aluminum, with basic coating	10 PCS / 40 BUN
NEW	92428		250	119505	Aluminum, with basic coating	10 PCS / 32 BUN
NEW	92430		250	119504	Aluminum, with basic coating	10 PCS / 24 BUN



JOINT PROFILES

Expansion joint profile for interior and exterior render


Expansion joint profile made of stainless steel for interior and exterior plastering from 6 mm. Outdoors and in wet rooms only for vertical use.

Movement absorption tension/compression:
+/- 5 mm

Notes:
See data sheet for possible profile combinations.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2236	6 mm	250	102498	Stainless steel	25 PCS / 160 BUN




Sliding joint profile for thermal insulation

Sliding bearing joint profile - Clip-on profile for forming sliding bearing joints for ETICS systems.

Suitable for product: 9181; 2151

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9182		250	102009	6 mm	Aluminum natural	20 PCS / 126 BUN
2152		250	101406	6 mm	Stainless steel	10 PCS / 200 BUN




Sliding joint profile for thermal insulation

Sliding bearing joint profile – lower section for forming sliding bearing joints for ETICS systems.

Suitable for product: 9182; 2152



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9181		250	102008	6 mm	Aluminum natural	20 PCS / 154 BUN
2151		250	101403	6 mm	Stainless steel	10 PCS / 234 BUN




Sliding joint profile for thermal insulation

Plain bearing joint profile - slide-in profile for forming plain bearing joints in ETIC systems, particularly suitable for producing the joint in the case of extensions with a lightweight construction.

Notes:
Profile for subsequent insertion into the sliding bearing joint, e.g. between a solid old building and a building extension in lightweight construction.


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9540		250	115637	6 mm	Aluminum natural	10 PCS / 48 BUN



Sliding joint profile for thermal insulation

Plain bearing joint profile - slide-in profile for forming plain bearing joints in ETIC systems, particularly suitable for producing the joint in the case of extensions with a lightweight construction.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37540		250	115994	6 mm	Rigid PVC with glass fibre mesh	15 PCS / 13 BOX



Expansion joint profile for thermal insulation


Expansion joint profile made of hard PVC and loop in the middle part made of soft PVC with alkali-resistant glass fiber fabric for interior and exterior plastering from 6 mm, for use on surfaces. Outdoors and in wet rooms only for vertical use.

Colour: 10 - white

Notes:

One-sided fabric and loop overhang at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
30351		250	116300	6 mm	Rigid PVC with soft PVC and glass fibre mesh	10 PCS / 48 BOX
30352		250	116301	10 mm	Rigid PVC with soft PVC and glass fibre mesh	10 PCS / 48 BOX



Expansion joint profile for thermal insulation


Expansion joint profile made of hard PVC and loop in the middle part made of soft PVC with alkali-resistant glass fiber fabric for interior and exterior plastering from 6 mm, for use in the inside corner. Outdoors and in wet rooms only for vertical use.

Colour: 10 - white

Notes:

Fabric and loop overhang of 5 cm on one side at the end of the rod.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
30361		250	116302	6 mm	Rigid PVC with soft PVC and glass fibre mesh	10 PCS / 48 BOX
30362		250	116303	10 mm	Rigid PVC with soft PVC and glass fibre mesh	10 PCS / 48 BOX



Expansion joint profile for thermal insulation

Expansion joint profile made of hard PVC and middle part made of soft PVC with alkali-resistant glass fiber fabric for interior and exterior plastering from 6 mm, for use on the surface and in the inside corner. Outdoors and in wet rooms only for vertical use.

Movement absorption tension/compression: +4/-2 mm


Colour: 10 - white

Fabric dimension: 100/100 mm

Mesh size: 4 x 4 mm

Grammage: 160 g/m²

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37532		300	109538	6 mm	Rigid PVC with soft PVC and glass fibre mesh	10 PCS / 15 BOX



JOINT PROFILES

Expansion joint profile for thermal insulation

Movement joint profile made of hard PVC and middle part made of soft PVC with sewn-on alkali-resistant fiberglass fabric for interior and exterior plastering from 6 mm, for use on the surface and in the inside corner. Outdoors and in wet rooms only for vertical use.

Movement absorption tension/compression:
+/-1,5 mm

Colour: 10 - white


Fabric dimension: 100/100 mm

Mesh size: 4 x 4 mm

Grammage: 160 g/m²

Notes:

One-sided fabric overhang of 10 cm at the end of the rod.




Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37531		275	115761	6 mm	Rigid PVC with soft PVC and glass fibre mesh	10 PCS / 13 BOX

Edge profile with waterdrip nose and mesh for lathwork board

Frame profile with drip edge made of PVC with alkali-resistant fabric for horizontal use for panel thickness 12.5 mm with 6 mm plaster structure.

Colour: 10 - white




NEW

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37155		250	118868	6 mm	Rigid PVC with glass fibre mesh	25 PCS / 20 BOX

Edge profile with mesh for Lathwork boards

PVC edging profile with alkali-resistant fabric for panel thickness 12.5 mm with 6 mm plaster structure.

Colour: 10 - white



NEW


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
37154		250	118867	6 mm	Rigid PVC with glass fibre mesh	25 PCS / 20 BOX

PROFILES FOR MECHANICAL FIXING

Start profile for mechanical fixed thermal insulation

Hard PVC starter strip for mechanically fastened ETICS systems.


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3759		250	103114		Hard PVC	20 PCS / 24 BOX



Retaining profile for mechanical fixed thermal insulation

Retaining profile made of rigid PVC for mechanical fixed thermal insulation.


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3760		250	101761		Hard PVC	25 PCS / 20 BOX



Connecting profile for mechanical fixed thermal insulation

Connection profile made of rigid PVC for mechanical fixed thermal insulation.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
3761		49	101766		Hard PVC	100 PCE / 60 BOX



Connecting profile for mechanical fixed thermal insulation

Aluminium Connection profile for mechanical fixed thermal insulation.


Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9115		47	101932		Aluminum natural	100 PCE / 40 BOX
9114		59	101906		Aluminum natural	100 PCE / 40 BOX



Retaining profile for mechanical fixed thermal insulation

Aluminium retaining profile for mechanical fixed thermal insulation.

Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
9116		200	101934		Aluminum natural	25 PCS / 36 BOX




PROFILES FOR INSULATING PLASTER

Corner bead for insulating

Corner profile made of galvanised steel with PVC coating for thermal insulation plaster with various plaster thicknesses (a). In the reveal area additionally for different plaster thicknesses variable applicable.

Colour: 10 - white

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1063	30 mm	300	100668	Galvanised steel, with PVC coating	15 PCS / 49 BUN
1064	40 mm	300	100678	Galvanised steel, with PVC coating	15 PCS / 35 BUN
1065	50 mm	300	100686	Galvanised steel, with PVC coating	15 PCS / 35 BUN
1066	60 mm	300	100694	Galvanised steel, with PVC coating	15 PCS / 35 BUN




Base stop profile for insulating

Render stops made of galvanised steel with PVC coating for thermal insulation plaster with different plaster thicknesses (a).

Colour: 10 - white

Angular position: 110°

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1263	30 mm	300	100975	Galvanised steel, with PVC coating	15 PCS / 63 BUN
1264	40 mm	300	100976	Galvanised steel, with PVC coating	15 PCS / 54 BUN
1265	50 mm	300	100977	Galvanised steel, with PVC coating	15 PCS / 49 BUN
1266	60 mm	300	100978	Galvanised steel, with PVC coating	15 PCS / 55 BUN




Stop profile for insulating

Render stops made of galvanised steel with PVC coating for thermal insulation plaster with different plaster thicknesses (a).

Colour: 10 - white

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1283	30 mm	300	101019	Galvanised steel, with PVC coating	15 PCS / 55 BUN
1284	40 mm	300	101025	Galvanised steel, with PVC coating	15 PCS / 55 BUN
1285	50 mm	300	101029	Galvanised steel, with PVC coating	15 PCS / 55 BUN
1286	60 mm	300	101035	Galvanised steel, with PVC coating	15 PCS / 55 BUN




Base and lintel stop profile for insulating

Base profiles/window lintels made of galvanised steel with PVC coating for thermal insulation plaster with different plaster thicknesses (a).

Colour: 10 - white

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1295	50 mm	300	101052	Galvanised steel, with PVC coating	15 PCS / 40 BUN



SALE

INSULATION DOWELS

Insulation dowels for plastered exterior wall insulation

Insulation dowel with plastic nail for flush mounting in all common plasterable exterior wall insulation materials. Suitable for concrete and masonry in service categories A to D.

color value: T5 - rot
Notes:
Plate Ø 60 mm, dowel Ø 10 mm
Anchoring depth: 50 mm

Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
15270		10	120229	PVC	100 PCE / 5 BAG
15271		12	120230	PVC	100 PCE / 5 BAG
15272		14	120231	PVC	100 PCE / 5 BAG
15273		16	120232	PVC	100 PCE / 5 BAG
15274		18	120233	PVC	100 PCE / 5 BAG
15275		20	120234	PVC	100 PCE / 5 BAG



Insulation dowels for plastered exterior wall insulation

Insulation dowel with steel nail for flush mounting in all common plasterable exterior wall insulation materials. Suitable for concrete and masonry in service categories A to D.

color value: T5 - rot
Notes:
Plate Ø 60 mm, dowel Ø 8 mm
Anchoring depth: 60 mm

Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
15276		10	120235	PVC	100 PCE / 5 BAG
15277		12	120236	PVC	100 PCE / 5 BAG
15278		14	120238	PVC	100 PCE / 5 BAG
15279		16	120239	PVC	100 PCE / 5 BAG
15280		18	120240	PVC	100 PCE / 5 BAG
15281		20	120241	PVC	100 PCE / 5 BAG



Insulation dowels for plastered exterior wall insulation

Insulation dowel with steel nail for flush mounting in all common plasterable exterior wall insulation materials. Suitable for concrete and masonry in service categories A to D.

color value: T5 - rot
Notes:
Plate Ø 60 mm, dowel Ø 10 mm
Anchoring depth: 75 mm

Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
15282		20	120242	PVC	100 PCE / 2 BAG
15283		22	120243	PVC	100 PCE / 2 BAG
15284		24	120244	PVC	100 PCE / 2 BAG
15285		26	120245	PVC	100 PCE / 2 BAG
15286		28	120246	PVC	100 PCE / 2 BAG
15287		30	120247	PVC	100 PCE / 2 BAG



Insulation dowels for plastered exterior wall insulation

Insulation dowel with plastic nail for flush mounting in all common plasterable exterior wall insulation materials. Suitable for concrete and masonry in service categories A to D.

color value: T5 - rot
Notes:
Plate Ø 60 mm, dowel Ø 8 mm
Anchoring depth: 50 mm

Item number	Insulating boards (mm)	Length (cm)	Order number	Material	Package/ Large pack
15288		20	120248	PVC	100 PCE / 2 BAG
15289		22	120249	PVC	100 PCE / 2 BAG
15290		24	120250	PVC	100 PCE / 2 BAG



REINFORCEMENT MESH

Reinforcing mesh ETICS

Reinforcing mesh for thermal insulation. 4 x 4 mm, 160 g/m² blue, fabric width 1 m

Mesh size: 4 x 4 mm
Grammage: 160 g/m²



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
1492		5,000	109173		Alcali-resistant glass fibre mesh	50 M / 30 ROL

Reinforcing mesh ETICS

Reinforcing mesh for external thermal insulation composite systems with 'PROTEKTOR' imprint. 4 x 4 mm, 145 g/m² white, fabric width 1 m

Mesh size: 4 x 4 mm
Grammage: 145 g/m²



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
1493		5,000	111947		Alcali-resistant glass fibre mesh	50 M / 33 ROL

Reinforcing mesh ETICS

Reinforcing mesh for external thermal insulation composite systems. 4 x 5 mm, 160 g/m² yellow, fabric width 1.1 m

color value: R8 - yellow



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
1494		5,000	111308		Alcali-resistant glass fibre mesh	50 M / 33 ROL

Reinforcing mesh for thermal insulation

Reinforcing mesh for thermal insulation. 6 x 6 mm, 160 g/m² white, fabric width 1 m

color value: 10 - white



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
1098		5,000	109865		Alcali-resistant glass fibre mesh	50 M / 25 ROL

Reinforcing mesh ETICS

Reinforcing mesh for thermal insulation. 8 x 8 mm, 210 g/m² bordeaux red, fabric width 100 cm

color value: BX - bordeaux



Item number	Insulating boards (mm)	Length (cm)	Order number	Plaster thickness (mm)	Material	Package/ Large pack
14916		5,000	118637		Alcali-resistant glass fibre mesh	50 M / 20 ROL

REINFORCING MESH EXTERNAL RENDERING

Glass fibre mesh universal

Glass fibre mesh for universal use in interior and exterior plastering. Can be used for surface reinforcement, for transitions from e.g. wall connections, material changes, wall slits, roller shutter boxes, etc., as well as for embedding in bitumen thick coatings and floor levelling compounds.

Mesh size: 6 x 6 mm
Grammage: 105 g/m²

Notes:
Properties: Alkali-resistant, non-shifting, plasticiser-free



Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14917	100 cm x 50 m	119798	Glass fiber	10 - white	50 M2 / 30 ROD
	100 cm x 100 m	119799	Glass fiber	10 - white	100 M2 / 15 ROD
	50 cm x 50 m	119800	Glass fiber	10 - white	50 M2 / 30 ROD
	50 cm x 100 m	119801	Glass fiber	10 - white	100 M2 / 15 ROD
	33 cm x 50 m	119802	Glass fiber	10 - white	50 M2 / 30 ROD
	33 cm x 100 m	119803	Glass fiber	10 - white	100 M2 / 15 ROD
	25 cm x 100 m	119804	Glass fiber	10 - white	100 M2 / 15 ROD
	20 cm x 50 m	119805	Glass fiber	10 - white	50 M2 / 30 ROD


Reinforcing mesh exterior plaster

Reinforcement fabric for exterior base plasters. Suitable for surface reinforcement and at transitions, e.g. wall connections, material changes, wall slits, roller shutter housings, etc.

Mesh size: 10 x 10 mm

Grammage: 140 g/m²

Notes:
Properties: Alkali-resistant, non-shifting, plasticiser-free



Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14918	100 cm x 50 m	119806	Glass fiber	CD - blue	50 M2 / 24 ROD
	100 cm x 100 m	119807	Glass fiber	CD - blue	100 M2 / 12 ROD
	50 cm x 50 m	119808	Glass fiber	CD - blue	50 M2 / 24 ROD
	50 cm x 100 m	119809	Glass fiber	CD - blue	100 M2 / 12 ROD
	33 cm x 50 m	119810	Glass fiber	CD - blue	50 M2 / 24 ROD
	33 cm x 100 m	119811	Glass fiber	CD - blue	100 M2 / 12 ROD
	25 cm x 100 m	119812	Glass fiber	CD - blue	100 M2 / 12 ROD

Reinforcing mesh exterior plaster

Reinforcement fabric for exterior base plasters. Suitable for surface reinforcement and at transitions, e.g. wall connections, material changes, wall slits, roller shutter housings, etc.

Mesh size: 10 x 10 mm

Grammage: 165 g/m²

Notes:
Properties: Alkali-resistant, non-shifting, plasticiser-free




Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14919	100 cm x 50 m	119813	Glass fiber	10 - white	50 M2 / 24 ROD
	100 cm x 100 m	119814	Glass fiber	10 - white	100 M2 / 12 ROD
	100 cm x 50 m	119815	Glass fiber	CD - blue	50 M2 / 24 ROD
	100 cm x 100 m	119816	Glass fiber	CD - blue	100 M2 / 12 ROD

REINFORCING MESH EXTERNAL RENDERING

Reinforcing mesh exterior plaster

Reinforcement fabric for exterior base plasters. Suitable for surface reinforcement and at transitions, e.g. wall connections, material changes, wall slits, roller shutter housings, etc.

Mesh size: 13 x 13 mm
Grammage: 130 g/m²
Notes:
Properties: Alkali-resistant, non-shifting, plasticiser-free



Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14928	33 cm x 100 m	120222	Glass fiber	CD - blue	100 M2 / 36 ROD

REINFORCING MESH INTERNAL PLASTERING

Balkenfix reinforcing mesh

Balkenfix as reinforcement strip, laminated in the centre with creped oil paper, for covering e.g. wall slots, wooden beams, cracks, etc.

Mesh size: 10 x 10 mm

Grammage: 140 g/m²

Notes:

Properties: Alkali-resistant, non-shifting

Item number	Width (mm)	Length (cm)	Order number	Material	Color	Package/ Large pack
14960	166	5,000	119716	Glass fiber	CD - blue	6 PCE / 36 BOX
14961	200	5,000	119717	Glass fiber	CD - blue	5 PCE / 30 BOX
14962	250	5,000	119718	Glass fiber	CD - blue	4 PCE / 24 BOX
14963	330	5,000	119719	Glass fiber	CD - blue	3 PCE / 18 BOX
14964	400	5,000	119720	Glass fiber	CD - blue	3 PCE / 18 BOX



Reinforcing mesh for interior plaster

Reinforcement fabric for interior base plasters. Can be used for surface reinforcement and at transitions from e.g. wall connections, material changes, wall slits, roller shutter boxes, etc.

Mesh size: 5 x 5 mm

Grammage: 75 g/m²

Notes:

Properties: Alkali-resistant, non-shifting, plasticiser-free

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14911	100 cm x 10 m	119790	Glass fiber	10 - white	10 M2 / 160 ROD
	100 cm x 50 m	119791	Glass fiber	10 - white	50 M2 / 48 ROD
	100 cm x 100 m	119792	Glass fiber	10 - white	100 M2 / 24 ROD
	50 cm x 50 m	119793	Glass fiber	10 - white	50 M2 / 48 ROD
	50 cm x 100 m	119794	Glass fiber	10 - white	100 M2 / 24 ROD
	33 cm x 50 m	119795	Glass fiber	10 - white	50 M2 / 48 ROD
	33 cm x 100 m	119796	Glass fiber	10 - white	100 M2 / 24 ROD
	25 cm x 100 m	119797	Glass fiber	10 - white	100 M2 / 24 ROD
	20 cm x 100 m	120252	Glass fiber	10 - white	20 M2 / 120 ROL



REINFORCING MESH THERMAL INSULATION

Reinforcing mesh ETICS

Reinforcement fabric for surface reinforcement in thermal insulation composite systems. Can also be used outside the system to prevent or repair cracks in the facade area.

Mesh size: 4 x 4 mm

Grammage: 160 g/m²

Notes:

Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14920	100 cm x 50 m	119817	Glass fiber	10 - white	50 M2 / 33 ROD
	110 cm x 50 m	119818	Glass fiber	10 - white	55 M2 / 33 ROD
	100 cm x 50 m	119819	Glass fiber	R8 - yellow	50 M2 / 33 ROD
	100 cm x 50 m	119820	Glass fiber	Z1 - orange	50 M2 / 33 ROD
	100 cm x 50 m	119821	Glass fiber	CD - blue	50 M2 / 33 ROD
	100 cm x 50 m	119822	Glass fiber	T5 - rot	50 M2 / 33 ROD
	100 cm x 50 m	119823	Glass fiber	GN - grün	50 M2 / 33 ROD
	100 cm x 50 m	119824	Glass fiber	G1 - oliv	50 M2 / 33 ROD
	100 cm x 50 m	119825	Glass fiber	BX - bordeaux	50 M2 / 33 ROD
	110 cm x 50 m	120311	Glass fiber	R8 - yellow	55 M2 / 33 ROD



Reinforcing mesh ETICS

Reinforcement fabric for surface reinforcement in thermal insulation composite systems. Can also be used outside the system to prevent or repair cracks in the facade area.

Mesh size: 6 x 6 mm

Grammage: 160 g/m²

Notes:

Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14921	100 cm x 50 m	119826	Glass fiber	10 - white	50 M2 / 24 ROD
	100 cm x 50 m	119827	Glass fiber	R8 - yellow	50 M2 / 24 ROD
	100 cm x 50 m	119828	Glass fiber	Z1 - orange	50 M2 / 24 ROD
	100 cm x 50 m	119829	Glass fiber	T5 - rot	50 M2 / 24 ROD
	100 cm x 50 m	119830	Glass fiber	GN - grün	50 M2 / 24 ROD



Reinforcing mesh ETICS

Reinforcement fabric for surface reinforcement in thermal insulation composite systems. Can also be used outside the system to prevent or repair cracks in the facade area.

Mesh size: 4 x 4 mm

Grammage: 165 g/m²

Notes:

Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14922	100 cm x 10 m	119831	Glass fiber	10 - white	10 M2 / 125 ROD
	100 cm x 50 m	119832	Glass fiber	10 - white	50 M2 / 33 ROD
	110 cm x 50 m	119833	Glass fiber	10 - white	55 M2 / 33 ROD
	100 cm x 10 m	119834	Glass fiber	BX - bordeaux	10 M2 / 125 ROD
	100 cm x 50 m	119835	Glass fiber	BX - bordeaux	50 M2 / 33 ROD
	100 cm x 10 m	119836	Glass fiber	R8 - yellow	10 M2 / 125 ROD
	100 cm x 50 m	119837	Glass fiber	R8 - yellow	50 M2 / 33 ROD
	100 cm x 10 m	119838	Glass fiber	CD - blue	10 M2 / 125 ROD
	100 cm x 50 m	119839	Glass fiber	CD - blue	50 M2 / 33 ROD



REINFORCING MESH THERMAL INSULATION

Reinforcing mesh ETICS

Reinforcement mesh for surface reinforcement in ETICS systems. Can also be used outside the system to prevent or repair cracks in the facade area.

Mesh size: 7 x 7 mm
Grammage: 210 g/m²
Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14923	100 cm x 50 m	119843	Glass fiber	10 - white	50 M2 / 20 ROD
	100 cm x 50 m	119844	Glass fiber	G1 - oliv	50 M2 / 20 ROD
	100 cm x 50 m	119845	Glass fiber	BX - bordeaux	50 M2 / 20 ROD



Reinforcing mesh ETICS

Reinforcement mesh for surface reinforcement in ETICS systems. Can also be used outside the system to prevent or repair cracks in the facade area.

Mesh size: 8 x 8 mm
Grammage: 210 g/m²
Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14924	100 cm x 50 m	119846	Glass fiber	10 - white	50 M2 / 20 ROD
	100 cm x 50 m	119847	Glass fiber	G1 - oliv	50 M2 / 20 ROD
	100 cm x 50 m	119849	Glass fiber	BX - bordeaux	50 M2 / 20 ROD



Filler and renovation mesh

Reinforcement fabric for the execution of surface reinforcement in ETICS systems. Can also be used outside the system to prevent or remediate cracks in the façade area.

Mesh size: 4 x 4 mm
Grammage: 145 g/m²
Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14925	100 cm x 50 m	119850	Glass fiber	10 - white	50 M2 / 33 ROD




Armoured mesh

Reinforcement fabric for the reinforcement of mechanically heavily loaded areas in ETICS systems. Can be used for e.g. plinth areas, connections to balconies, terraces, roller shutter boxes, etc.

Mesh size: 6 x 6 mm
Grammage: 330 g/m²
Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.

Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14926	100 cm x 25 m	119851	Glass fiber	10 - white	25 M2 / 33 ROD



REINFORCING MESH THERMAL INSULATION

Armoured mesh

Reinforcement fabric for the reinforcement of mechanically heavily loaded areas in ETICS systems. Can be used for e.g. plinth areas, connections to balconies, terraces, roller shutter boxes, etc.

Mesh size: 6 x 8 mm
Grammage: 330 g/m²

Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.



Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14927	100 cm x 25 m	119852	Glass fiber	10 - white	25 M2 / 33 ROD

Diagonal reinforcement for ETICS

Reinforcement arrow for diagonal reinforcement in the area of corners such as windows, doors and niches to prevent cracking.

Fabric dimension: 330 x 400 mm
Mesh size: 4 x 4 mm
Grammage: 165 g/m²

Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free. Fulfils the requirements of ETAG 004.



Item number	Width (mm)	Length (cm)	Order number	Material	Color	Package/ Large pack
14940		40	119699	Glass fiber	10 - white	100 PCE / 60 BOX
14941		40	119706	Glass fiber	10 - white	10 PCE / 120 BOX


Diagonal reinforcement for ETICS

Reinforcement arrow for diagonal reinforcement in the area of corners such as windows, doors and niches to prevent cracking.

Fabric dimension: 330 x 400 mm
Mesh size: 7 x 7 mm
Grammage: 200 g/m²
Notes:
Fulfils the requirements of ETAG 004.



Item number	Width (mm)	Length (cm)	Order number	Material	Color	Package/ Large pack
14942		40	119707	Glass fiber	10 - white	100 PCE / 60 BOX
14943		40	119708	Glass fiber	10 - white	10 PCE / 120 BOX

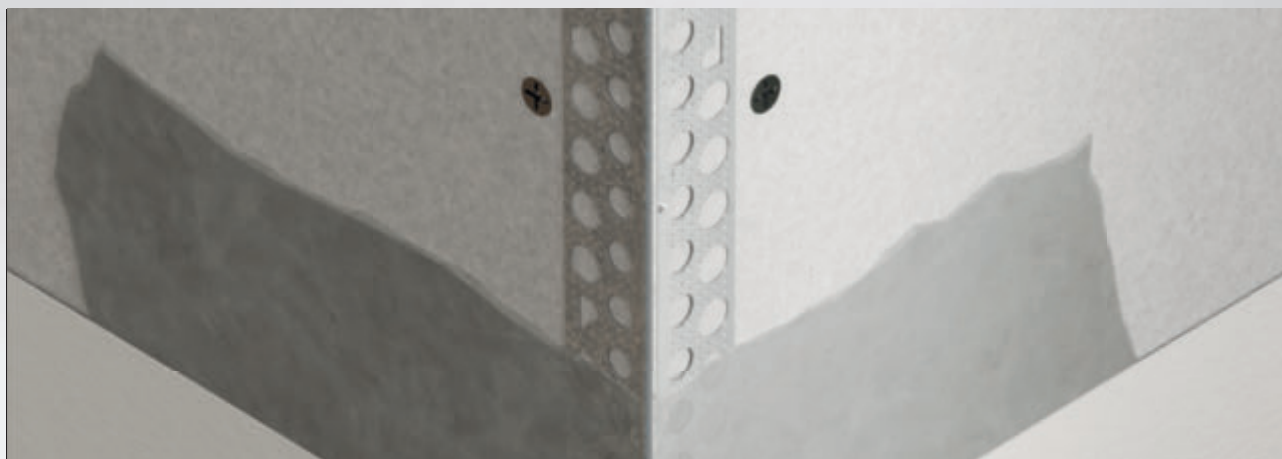

GENERAL INFORMATION

- For internal finishing, trowel profiles made of metal (steel, aluminum, stainless steel), plastic or composite profiles are used for edges, connections and terminations, edgings, movement joints or creative designs.
- Our paper-flocked or paper-laminated composite profiles ensure a particularly precise and fast filling result in dry construction, with minimal filling consumption.
- They are extremely resilient and impact-resistant and can be used as roll material for all edge and angle positions.
- The water-activated, self-adhesive WET profiles are set without additional filler or mechanical fastening.
- Setting the filler profiles is even faster with the NEW Protektor spray adhesive!
- Cut metal profiles with hand shears. Never cut galvanized profiles with a cutting disc. Process stainless steel profiles only with rustproof tools and cut with a cutting disc recommended for stainless steel. Cut PVC profiles to the required installation dimension using suitable PVC shears (e.g. Protektor profile shears).
- Fill in both sides of the edge profiles all the way to the head. Place edge and end profiles on factory-bevelled GRP edges or chamfer cut edges.
- Edge profiles, connecting profiles and stop profiles, which are applied to the GRP panels, must be embedded in the filler over the entire surface.
- Do not overfill metal or PVC edging profiles, only apply filler.
- Expansion and movement joint profiles must be mechanically fixed by means of staples or screws in addition to the filler fastening.
- It is advisable to store rolled PVC profiles at room temperature $\geq 18^{\circ}\text{C}$ in winter to facilitate the processing.
- Store all profiles in a dry place! Additionally, store PVC profiles in a cool and frost-free place, horizontal and flat lying.

All standards and guidelines on the subject of plaster and drywall must be observed in their current version, in particular the following leaflet:

- Leaflet for the planning and application of metallic plaster profiles in external and internal areas from the European Association of Plaster Profile Manufacturers.

The product information as well as the additional information with the respective product illustrations in this catalogue and the further notes in our product data sheets and processing instructions on our homepage must be observed! For the selection of metallic plaster profiles, please refer to the table for profile selection according to mortar types.

The VOB mark of Protektor - quality that pays off. Protektor trowel profiles with the blue sign meet the requirements of the VOB and can be invoiced as special services.

So with the blue sign on your side, you can easily find the right profile to deliver quality and receive performance.



CORNER PROFILES


Corner bead for dry lining

Galvanised steel corner profiles for jointing on plasterboard edges.

Notes:
With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1030	1 mm	250	117431	Galvanised steel	30 PCS / 160 BUN
	1 mm	300	117435	Galvanised steel	30 PCS / 140 BUN




Corner bead for dry lining

Galvanised steel corner profiles for jointing on plasterboard edges. With long plastering leg for covering tears along cut edges.

Notes:
With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1078	1 mm	250	112221	Galvanised steel	25 PCS / 90 BUN
	1 mm	300	112222	Galvanised steel	25 PCS / 90 BUN



CORNER PROFILES

Corner bead for dry lining


Aluminium corner profiles for jointing on plaster-board edges.

Material thickness (mm): 0,35 mm

Stainless steel version: 1031

Notes:

Profile is not CE-compliant. With 3D surface structure for greater profile stability and improved plaster embedding.



SALE

Item number	Plaster thickness (mm)	Length (cm)	Material thickness (mm)	Order number	Material	Package/ Large pack
9579	1 mm	200	0,35 mm	108546	Aluminum natural	50 PCS / 136 BUN
	1 mm	250	0,35 mm	106172	Aluminum natural	50 PCS / 136 BUN
	1 mm	275	0,35 mm	106228	Aluminum natural	50 PCS / 136 BUN
	1 mm	300	0,35 mm	106173	Aluminum natural	50 PCS / 136 BUN
9079	1 mm	200	0,4 mm	106952	Aluminum natural	50 PCS / 136 BUN
	1 mm	250	0,4 mm	106950	Aluminum natural	50 PCS / 136 BUN
	1 mm	275	0,4 mm	106953	Aluminum natural	50 PCS / 136 BUN
	1 mm	300	0,4 mm	106954	Aluminum natural	50 PCS / 136 BUN
9078	1 mm	200	0,45 mm	106955	Aluminum natural	50 PCS / 136 BUN
	1 mm	250	0,45 mm	106956	Aluminum natural	50 PCS / 136 BUN
	1 mm	275	0,45 mm	106957	Aluminum natural	50 PCS / 136 BUN
	1 mm	300	0,45 mm	106958	Aluminum natural	50 PCS / 136 BUN

Corner bead for dry lining

Aluminium corner profiles for jointing on plaster-board edges.

Material thickness (mm): 0,3 mm

Notes:

With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9779	1 mm	200	119337	Aluminum natural	50 PCS / 136 BUN
	1 mm	250	119290	Aluminum natural	500 PCS / 136 BUN
	1 mm	275	119309	Aluminum natural	500 PCS / 136 BUN
	1 mm	300	118837	Aluminum natural	50 PCS / 136 BUN

CORNER PROFILES


Corner bead for dry lining

Aluminium corner profiles with white case coat for jointing on plasterboard edges.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9278	1 mm	250	102032	Aluminum, with basic coating	50 PCS / 126 BUN




Corner bead for dry lining

Stainless steel corner profile for filler and thin-layer plaster of 1 mm and thicker in interior areas.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1031	1 mm	250	117438	Stainless steel	30 PCS / 160 BUN
	1 mm	260	117439	Stainless steel	30 PCS / 140 BUN
	1 mm	300	117440	Stainless steel	30 PCS / 140 BUN



Corner bead 135° for dry lining

Aluminium corner profiles for jointing on plasterboard edges. Profile for 135° corner execution.


Rounding off radius: 2,75 mm

Notes:

Specially developed for schools and nurseries. Fulfills the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9172	1 mm	250	101988	Aluminum natural	50 PCS / 180 BUN
	1 mm	300	101990	Aluminum natural	50 PCS / 150 BUN




Corner bead for dry lining

Aluminium corner profile, with an extra-long plastering leg, for jointing on plasterboard panels, providing greater stability and preventing cracks in the cut edge area.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
9179	1 mm	250	102002	Aluminum natural	25 PCS / 108 BUN
	1 mm	300	102005	Aluminum natural	25 PCS / 108 BUN



CORNER PROFILES


Corner bead for dry lining

Corner profile made of aluzinc steel, for plaster of 2 mm in the interior.

Processing instructions:
Placed and fixed in a mortar bed, if necessary to fix with additional clips.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1033	2 mm	250	109281	Steel, aluzinc	25 PCS / 150 BUN
	2 mm	260	109282	Steel, aluzinc	25 PCS / 150 BUN
	2 mm	300	109283	Steel, aluzinc	25 PCS / 150 BUN




Corner bead for dry lining

Edge profiles made of PVC for jointing on plaster-board edges. With the narrow head allowed a forming sharp and precise edges.

Notes:
Secure the profile additionally with staples.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37171	1 mm	260	114247	Hard PVC	100 PCS / 36 BOX
	1 mm	300	114494	Hard PVC	100 PCS / 36 BOX




Flexible corner bead for dry lining

PVC corner beads on roles for plastering work. “Kink joints” allow application on obtuse and acute angled plasterboard edges. The profiles must also be fastened with galvanised clips.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3751	1 mm	5,000	103773	Hard PVC	2 ROL / 52 BOX




Flexible edge profile for drywall construction

PVC corner beads for plastering work. “Kink joints” allow application on obtuse and acute angled plasterboard edges. The profiles must also be fastened with galvanised clips.

Colour: 10 - white
Notes:
Secure the profile additionally with staples.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37179	1 mm	260	120272	Hard PVC	100 PCS / 36 BOX



CORNER PROFILES

Flexible inside corner bead for dry lining

PVC inside corner profile for creating gypsum corners. Universal applications thanks to “kink folds” for angles of 70° to 135°.

Colour: 10 - white
Notes:
Trim-Tex 4310
Adjustable Inside Corner Bead



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3770	1 mm	305	102585	Hard PVC	70 PCS / 80 BOX




Corner bead for dry lining

PVC edge profile with fine sharp-tipped head for high-quality plaster work.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3790	2 mm	260	105611	Hard PVC	60 PCS / 36 BOX



Corner bead for dry lining

Edge profile made of PVC for filling plasterboard edges.

Rounding off radius: 4,5 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
37651		305	119543	10 - white	Hard PVC	50 PCS / 80 BOX

NEW


Inside corner bead for dry lining

PVC inside corner profile for plastering plasterboard panels. For creating channels within inside corners.

Colour: 10 - white
Rounding off radius: 19 mm
Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3780	2 mm	305	102612	Hard PVC	35 PCS / 80 BOX




CORNER PROFILES

Corner bead for dry lining

PVC corner profiles for creating plasterboard edges. Plasterboard panel edges must be attached.

Colour: 10 - white
Rounding off radius: 19 mm
Notes:
Specially developed for schools and nurseries.
Fulfil the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3776	2 mm	305	102598	Hard PVC	35 PCS / 80 BOX

Corner bead for dry lining

PVC corner profile with indentation on one side to create plasterboard edges. For creating curved plasterboard constructions. Plasterboard panel edges must be attached.

Colour: 10 - white
Rounding off radius: 19 mm
Notes:
Minimum bending radius > 30 cm.
Specially developed for schools and nurseries.
Fulfil the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3778	3 mm	305	102609	Hard PVC	35 PCS / 80 BOX

Corner bead for dry lining

PVC corner profile, with an extra-long plastering leg, for joining on plasterboard panels, providing greater stability and preventing cracks in the cut edge area. With sharp-tipped head for creating sharp corners.

Colour: 10 - white
Notes:
Trim-Tex RJ10LP
Rigid Jumbo Corner Bead 10'




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37172	2 mm	305	114399	Hard PVC	45 PCS / 63 BOX

Corner bead for dry lining

PVC corner profile, with an self-adhesive plastering leg, for joining on plasterboard panels.

Colour: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37169	2 mm	250	115783	Hard PVC	50 PCS / 15 BOX

CORNER PROFILES

Wallpaper corner bead

PVC wallpaper edging profile for glass fibre and textured wallpapers. With predetermined breaking point on one side of the profile leg, for use as wallpaper edging.




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3840	2 mm	260	102482	Hard PVC	60 PCS / 36 BOX
	2 mm	260	120447	Hard PVC	60 PCS / 36 BOX

Corner bead for dry lining

PVC corner profile with long plastering leg for covering up tears along the cutting edge. The profiles must also be fastened with clips.

Colour: 10 - white
Rounding off radius: 2,5 mm
Notes:

Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3763	3 mm	305	108872	Hard PVC	50 PCS / 80 BOX

Corner bead for dry lining

PVC corner profile, cut along one side, with a long plastering leg for covering up tears along the cutting surface and creating plasterboard edges. For creating curved plasterboard constructions.

Colour: 10 - white
Rounding off radius: 2,5 mm
Notes:

Minimum bending radius >30 cm. Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
3767	3 mm	300	102569	Hard PVC	20 PCS / 182 BOX

Corner bead for dry lining

Edge profile with a radius of 9.5 mm and extra long legs, for a filler thickness of 3 mm.

Notes:
Trim-Tex 35010
3/8 Medium Bullnose 10'
color value: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
8058	1 mm	305	103602	Hard PVC	35 PCS / 80 BOX

CORNER PROFILES

Corner bead for dry lining

PVC edge profile cut on one side for filling plaster-board edges. For the production of curved GK constructions. GK board edges must be touched.

Notes:
Specially developed for schools and nurseries. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).
color value: 10 - white



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
8060		305	110434		25 PCS / 96 BOX

PLASTER STOP PROFILES

Stop profile for dry lining

Stop profile with filler perforation for 9.5-mm-thick plasterboard.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1135	9,5 mm	250	100734	Galvanised steel	25 PCS / 140 BUN
	9,5 mm	300	100740	Galvanised steel	25 PCS / 140 BUN
1131	12,5 mm	250	100684	Galvanised steel	25 PCS / 90 BUN
	12,5 mm	300	100698	Galvanised steel	25 PCS / 80 BUN
1132	15 mm	250	100703	Galvanised steel	25 PCS / 90 BUN
	15 mm	300	100709	Galvanised steel	25 PCS / 80 BUN

Stop profile for dry lining

“Göppinger” aluminium profile for creating single edges at plastered junctions, e.g. sliding ceiling wall connections, for 9.5-mm plasterboard sheets.

Notes:
With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
9298	9,5 mm	250	102147	Aluminum natural	50 PCS / 250 BUN

Stop profile for dry lining

Stop profile with filler perforation for 12.5-mm-thick plasterboard.

Colour: 10 - white



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
11311	12,5 mm	300	107370	Galvanised steel, with white basic coating	25 PCS / 80 BUN

Stop profile for dry lining

“Göppinger” profile made of galvanised steel for creating single edges at plastered junctions, e.g. sliding ceiling and wall connections, for plasterboard sheets of 12.5 mm and thicker.

Notes:
With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1234	12,5 mm	250	102658	Galvanised steel	20 PCS / 210 BUN
	12,5 mm	275	102766	Galvanised steel	20 PCS / 210 BUN
	12,5 mm	300	102712	Galvanised steel	20 PCS / 210 BUN

PLASTER STOP PROFILES

Stop profile for dry lining

“Göppinger” profile made of galvanised steel for creating single edges at plastered junctions, e.g. sliding ceiling and wall connections, for plasterboard sheets of 12.5 mm and thicker.

Notes:
With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
12349	12,5 mm	250	120274	Galvanised steel	25 PCS / 150 BUN
	12,5 mm	275	120275	Galvanised steel	25 PCS / 140 BUN
	12,5 mm	300	120276	Galvanised steel	25 PCS / 130 BUN




Stop profile for dry lining

Edge and stop profile for double edging with 2 x 12.5 plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1138	12,5 mm	250	100752	Galvanised steel	15 PCS / 55 BUN



Stop profile for dry lining

“Göppinger” profile made of aluminium for creating single edges at plastered junctions, e.g. sliding ceiling and wall connections, for plasterboard sheets of 12.5 mm and thicker.

Material thickness: 0,35 mm
Notes:
Profile is not CE-compliant. With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plasterboards (mm)	Length (cm)	Material thickness (mm)	Order number	Material	Package/ Large pack
9599	12,5 mm	250	0,35 mm	106170	Aluminum natural	50 PCS / 200 BUN
	12,5 mm	275	0,35 mm	119350	Aluminum natural	50 PCS / 200 BUN
	12,5 mm	300	0,35 mm	106171	Aluminum natural	50 PCS / 200 BUN
9299	12,5 mm	250	0,4 mm	102150	Aluminum natural	50 PCS / 200 BUN
	12,5 mm	300	0,4 mm	102152	Aluminum natural	50 PCS / 200 BUN




Stop profile for dry lining

Stop profile made of aluzinc steel 12.5 mm for plastering into drywall construction. Use profiles in accordance with data sheet “Planning and Application”.

Gypsum plasterboards: 12,5 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
10883	2 mm	305	115337	Steel, aluzinc	50 PCS / 65 BOX



PLASTER STOP PROFILES

Stop profile for dry lining

Stop profile with filler perforation for 15-mm-thick plasterboard.

Colour: 10 - white



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
11321	15 mm	300	107529	Galvanised steel, with white basic coating	25 PCS / 80 BUN



Stop profile for dry lining

“Göppinger” aluminium profile for creating single edges at plastered junctions, e.g. sliding ceiling wall connections, for 15-mm plasterboard sheets.

Notes:

With 3D surface structure for greater profile stability and improved plaster embedding.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
9297	15 mm	250	106345	Aluminum natural	50 PCS / 275 BUN



Stop profile for dry lining

Stop profile with filler perforation for 18-mm-thick plasterboard.

Stainless steel version: 2233



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1133	18 mm	250	100713	Galvanised steel	25 PCS / 120 BUN
	18 mm	300	100718	Galvanised steel	25 PCS / 120 BUN




Stop profile for dry lining

Stop profile with filler perforation for 20-mm-thick plasterboard.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1134	20 mm	250	100722	Galvanised steel	25 PCS / 120 BUN
	20 mm	300	100729	Galvanised steel	25 PCS / 120 BUN



Stop profile for dry lining

“Göppinger” profile made of aluminium for creating single edges at plastered junctions, e.g. sliding ceiling and wall connections, for plasterboard panels of 25 mm and thicker (2 x 12.5 mm)

Notes:

With 3D surface structure for greater profile stability and improved plaster embedding.




Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
9002	25 mm	250	102919	Aluminum natural	50 PCS / 150 BUN



PLASTER STOP PROFILES

Stop profile for dry lining

Stop profile with filler perforation for 25-mm-thick plasterboard.




Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1136	25 mm	250	100744	Galvanised steel	25 PCS / 80 BUN
	25 mm	300	100748	Galvanised steel	25 PCS / 65 BUN

Connecting profile for plaster

The new aluminium cornice profile with a white base coating is a unique solution for creating a perfect transition from the ceiling grid to a smooth frieze edging that encompasses all four walls, for example. Simply clip on and tighten; there is no need to create a complex replacement structure.

Colour: 10 - white
Notes: Simple plugging and screwing replaces costly replacement constructions.




Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
9272		250	110320	Aluminum, with basic coating	15 PCS / 50 BUN

Stop profile for dry lining

PVC corner profile, cut along one side, for creating ceiling edges along curved walls. Universally applicable for panels with a thickness of 10 mm and 12.5 mm thanks to the pre-defined breaking point.

Colour: 10 - white
Notes: Minimum bending radius > 30 cm.




Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3768	9,5 / 12,5 mm	300	102575	Hard PVC	20 PCS / 182 BOX

Stop profile for dry lining

Stop profile made of PVC for creating single plastered junctions. Also available with removable protective strips for guard building elements against dirt.

Colour: 10 - white
Notes: Trim-Tex 9000
Flat Tear Away® L Bead



NEW

Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
37862		305	118485	Hard PVC	50 PCS / 140 BOX

PLASTER STOP PROFILES


Stop profile for dry lining

"Göppinger profile" made of PVC for creating single plastered junctions. Also available with removable protective strips for guard building elements against dirt.

Colour: 10 - white
Notes:
Trim-Tex 9010
½ Tear Away 10'



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3785	12,5 mm	305	108879	Hard PVC	50 PCS / 80 BOX




Stop profile for dry lining

"Göppinger profile" made of PVC for creating single plastered junctions.

Colour: 10 - white
Notes:
Trim-Tex AS3210
½ L Bead



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
37864	12,5 mm	305	115341	Hard PVC	80 PCS / 80 BOX
37865	15 mm	305	115342	Hard PVC	80 PCS / 80 BOX




Curved wall connecting profile for dry lining

PVC angle for creating curved connections on mineral fibre ceilings, such as for round columns or walls.

Colour: 10 - white
Notes:
Trim-Tex 8158
7/8 Flex Grid Angle




Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3769		250	102578	Hard PVC	10 PCS / 182 BOX



SHADOW JOINT PROFILES

Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 10-mm shadow joint. For creating plastered single edges at junctions, e.g. sliding walls and ceiling connections, for 9.5-mm plasterboard panels.




Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1316	9,5 mm	250	10 mm	101196	Galvanised steel	15 PCS / 99 BUN
	9,5 mm	300	10 mm	101212	Galvanised steel	15 PCS / 99 BUN
1314	12,5 mm	250	10 mm	101150	Galvanised steel	15 PCS / 95 BUN
	12,5 mm	300	10 mm	101156	Galvanised steel	15 PCS / 95 BUN

Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 15-mm shadow joint (closed). For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.

Stainless steel version: 2241



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1311	12,5 mm	300	15 mm	109445	Galvanised steel	15 PCS / 108 BUN

Connecting profile for dry lining

Stop profile made of galvanised steel with white base coat for assemblies underneath plasterboard panels, with a 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.

Colour: 10 - white
Stainless steel version: 2263




Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
13131	12,5 mm	300	20 mm	108508	Galvanised steel, with white basic coating	15 PCS / 69 BUN

Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 10-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.

color value: 10 - white




Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
13141	12,5 mm	300	10 mm	109163	Galvanised steel, with white basic coating	15 PCS / 95 BUN

SHADOW JOINT PROFILES

Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 15-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.




Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1319	12,5 mm	250	15 mm	101255	Galvanised steel	15 PCS / 88 BUN
	12,5 mm	300	15 mm	101260	Galvanised steel	15 PCS / 88 BUN

Connecting profile for dry lining

Stop profile made of galvanised steel with white base coating for assemblies underneath plasterboard panels, with a 15-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.


color value: 10 - white



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
13191	12,5 mm	300	15 mm	108256	Galvanised steel, with white basic coating	15 PCS / 88 BUN

Connecting profile for dry lining


Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 4-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1371	12,5 mm	250	4 mm	101354	Galvanised steel	15 PCS / 128 BUN
	12,5 mm	300	4 mm	101370	Galvanised steel	15 PCS / 112 BUN

Connecting profile for dry lining


Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 6-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1373	12,5 mm	300	6 mm	108512	Galvanised steel	10 PCS / 216 BUN

Connecting profile for dry lining

Galvanised steel render stop with 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1750	12,5 mm	300	20 mm	106753	Galvanised steel	20 PCS / 72 BUN


SHADOW JOINT PROFILES

Connecting profile for dry lining

Galvanised steel render stop with 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1751	12,5 mm	300	20 mm	106802	Galvanised steel	25 PCS / 105 BUN




Connecting profile for dry lining

Galvanised steel render stop with 15-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1753	12,5 mm	300	15 mm	108422	Galvanised steel	25 PCS / 120 BUN




Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 10-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 15-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1304	15 mm	300	10 mm	106405	Galvanised steel	15 PCS / 83 BUN



Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.

Stainless steel version: 2263



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1313	12,5 mm	250	20 mm	101136	Galvanised steel	15 PCS / 69 BUN
	12,5 mm	300	20 mm	101143	Galvanised steel	15 PCS / 69 BUN




Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 15-mm plasterboard panels.




Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1315	15 mm	300	20 mm	101190	Galvanised steel	15 PCS / 70 BUN



SHADOW JOINT PROFILES

Connecting profile for dry lining


Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 15-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 15-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1328	15 mm	300	15 mm	101312	Galvanised steel	15 PCS / 76 BUN

Connecting profile for dry lining


Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 6-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 15-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1374	15 mm	300	6 mm	108514	Galvanised steel	10 PCS / 165 BUN

Connecting profile for dry lining


Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 5-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 15-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1377	15 mm	300	5 mm	106406	Galvanised steel	15 PCS / 168 BUN

Connecting profile for dry lining


Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 6-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 20-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1375	20 mm	300	6 mm	108513	Galvanised steel	10 PCS / 144 BUN

Connecting profile for dry lining

Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 20-mm shadow joint. For creating plastered single edges at junctions, e.g. sliding ceiling and wall connections, for 25-mm plasterboard panels.



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
1325	25 mm	300	20 mm	101306	Galvanised steel	15 PCS / 42 BUN

SHADOW JOINT PROFILES

Connecting profile for dry lining


PVC render stop with 6-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.

Colour: 10 - white

Notes:

Trim-Tex AS5410

1/2" x 1/4" Z Shadow



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
37814	ab 12,5 mm	305	6 mm	114374	Hard PVC	50 PCS / 80 BOX
37824	ab 12,5 mm	305	12 mm	114371	Hard PVC	50 PCS / 80 BOX
37834	ab 12,5 mm	305	18 mm	114370	Hard PVC	50 PCS / 80 BOX

Connecting profile for dry lining

End profile made of PVC with 15 mm shadow gap. For producing finishes filled on one side, e.g. B. in the area of sliding ceiling or wall connections, for plasterboard from 15 mm.

Colour: 10 - white

Notes:

Trim-Tex AS6010

5/8" x 5/8" Z Shadow



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
37827	15 mm	305	15 mm	119532	Hard PVC	50 PCS / 80 BOX

Connecting profile for dry lining

End profile made of PVC with 18 mm shadow gap. For producing finishes filled on one side, e.g. B. in the area of sliding ceiling or wall connections, for plasterboard from 15 mm.

Colour: 10 - white

Notes:

Trim-Tex AS5910

5/8" x 3/4" Z Shadow



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
37825	15 mm	305	18 mm	119533	Hard PVC	50 PCS / 80 BOX

Connecting profile for dry lining

Connection and end profile made of PVC with shadow gap 9 mm for plasterboard from 9.5 mm. Cut on one side for the production of curved connections and terminations, e.g. B. in the area of sliding ceiling or wall connections. Additionally with tear-off protective strip to protect adjacent components from contamination.

Colour: 10 - white

Notes:

Trim-Tex 5550T

3/8" X 3/8" Tear Away Shadow Archway



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
37822	9,5 mm mm	305	9 mm	119530	Hard PVC	25 PCS / 96 BOX

SHADOW JOINT PROFILES

Connecting profile for dry lining

End profile made of PVC with 12 mm shadow gap. For producing finishes filled on one side, e.g. B. in the area of sliding ceiling or wall connections, for plasterboard from 12.5 mm. Additionally with tear-off protective strip to protect adjacent components from contamination.

Notes:
Trim-Tex 5510T
½" X ½" Tear Away Shadow



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
3789	12,5 mm	305	115251	10 - white	Hard PVC	25 PCS / 96 BOX


Connecting profile for dry lining

PVC render stop for creating single plastered endings with 12-mm shadow joints. For plasterboard panels of 12.5 mm and thicker.

Colour: 10 - white
Notes:
Trim-Tex AS8710
½" x ½" F Reveal



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
37844	ab 12,5 mm	305	12 mm	114400	Hard PVC	25 PCS / 80 BOX
37842	9,5 mm	305	9 mm	119544	Hard PVC	25 PCS / 80 BOX




Connecting profile for dry lining

PVC stop profile for creating single plastered endings with shadow joints. For plasterboard panels of 12.5 mm and thicker with pull-out cover strips.

Colour: 10 - white
Notes:
Trim-Tex 9140
Caulk Channel Tear Away 10'



Item number	Plasterboards (mm)	Length (cm)	Shadow gap	Order number	Material	Package/ Large pack
3788	15 mm	305	5 mm	114398	Hard PVC	40 PCS / 80 BOX



CONNECTING PROFILES


Connecting profile for dry lining

Stainless steel shadow joint profile
for plasterboard panels of 12.5 mm and thicker.

Gypsum plasterboards: 12,5 mm
Shadow gap: 20 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2263	14 mm	250	101386	Stainless steel	15 PCS / 69 BUN




Connecting profile for dry lining

Stainless steel connection profile with filler perforations and 15 mm formed shadow joint for 12.5-mm plasterboard panels.

Gypsum plasterboards: 12,5 mm
Shadow gap: 15 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2241	14 mm	250	106468	Stainless steel	15 PCS / 108 BUN




Connecting profile for dry lining

PVC stop profile for creating single plastered endings with shadow joints. For plasterboard panels of 12.5 mm and thicker with pull-out cover strips.

Colour: 10 - white
Notes:
Trim-Tex 3010
½" Pullaway® L Bead



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3766	ab 12,5 mm	300	102559	Hard PVC	35 PCS / 70 BOX




Connecting profile for dry lining

PVC stop profile for creating one-side trowled graduations . For plasterboard panels of 9.5 mm and thicker. With two flexible lips and detachable protective strips for protecting adjacent building elements.

Colour: 10 - white



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3784	ab 9,5 mm	300	102620	Hard PVC	30 PCS / 63 BOX



Connection profile with shadow gap and connection lip DL

Connection and end profile made of PVC
Shadow gap from 6.5 to 3.5 mm
for plasterboard from 9.5 mm
with round connection lip and tear-off
Strips to protect adjacent components.
For the production of one-sided fillers
Connections and terminations.

Notes:
Trim-Tex 9210
¾" Super Seal Tear Away®



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
37832	9,5 mm	305	119557	10 - white	Hard PVC	25 PCS / 96 BOX

NEW



Connection profile with narrow sealing lip

Connection and end profile made of PVC for all plasterboard thicknesses with connection lip and tear-off Strips to protect adjacent components. For the production of one-sided fillers Connections and terminations.

Notes:
Trim-Tex 9230
Flat Deflection Bead



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
NEW 37863		305	119556	10 - white	Hard PVC	60 PCS / 42 BOX

Connection profile with flexible soft connection

Connection and end profile made of PVC for plasterboard from 6.5 mm with connection lip and tear-off Strips to protect adjacent components. For the production of one-sided fillers Connections and terminations.

Notes:
Trim-Tex 9220
Deflection Bead



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
NEW 37848	6,5 mm	305	119542	10 - white	Hard PVC	48 PCS / 42 BOX

DESIGN PROFILES

Shadow joint profile for dry lining

PVC decorative profile with 13-mm shadow joint. For joining on plasterboard panels of 12.5 mm and thicker on one side. For vertical and horizontal applications.

Colour: 10 - white
Notes:
Trim-Tex AS5110
1/2" x 1/2" Reveal



13



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
37724	ab 12,5 mm	305	114369	Hard PVC	20 PCS / 63 BOX

Shadow joint profile for dry lining

PVC decorative profile with 20-mm shadow joint. For joining on plasterboard panels of 12.5 mm and thicker on one side. For vertical and horizontal applications.

Colour: 10 - white
Notes:
Trim-Tex AS5210
1/2" x 3/4" Reveal Bead



20



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
37734	ab 12,5 mm	305	114373	Hard PVC	15 PCS / 63 BOX

Shadow joint profile for dry lining

PVC render stop with 25-mm shadow joint. For joining on plasterboard panels of 12.5 mm and thicker on one side. For vertical and horizontal applications.

Colour: 10 - white
Notes:
Trim-Tex AS5310
1/2" x 1" Reveal



25



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
37744	ab 12,5 mm	305	114372	Hard PVC	15 PCS / 63 BOX

Expansion joint profile for dry lining

Expansion joint profiles made of galvanised steel, with an expansion element made of flexible PVC, joins building wall and ceiling expansion joints. For 12.5-mm plasterboard panels.

Movement absorption tension/compression:
+5/-2 mm

Notes:
PVC centre section can only be reworked with suitable coatings to a limited extent. Approval by coating manufacturer required.




Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
3226	12,5 mm	300	101514	10 - white	Galvanised steel	5 PCS / 70 BUN

Expansion joint profile for dry lining

White PVC movement joint profile with flexible PVC centre for producing movement joints in walls or ceilings according to the requirements of DIN 18181.

Movement absorption tension/compression:
+/-1,5 mm

Notes:
PVC centre section can only be reworked with suitable coatings to a limited extent. Approval by coating manufacturer required.




Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
3758	ab 8 mm	2,500	115058	10 - white	Rigid PVC with soft PVC	1 ROL / 50 BOX

Expansion joint profile for dry lining

Movement joint profile made of PVC with a middle section made of soft PVC for forming movement joints in the wall or ceiling area, in accordance with the requirements of DIN 18181.

Movement absorption tension/compression:
+/-1,5 mm

Notes:
PVC centre section can only be reworked with suitable coatings to a limited extent. Approval by coating manufacturer required.



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
3750	ab 8 mm	7,500	102521	10 - white	Rigid PVC with soft PVC	1 ROL / 120 BOX
37509	ab 8 mm	2,500	114624	10 - white	Rigid PVC with soft PVC	1 ROL / 144 BOX
37507	ab 8 mm	305	118343	10 - white	Rigid PVC with soft PVC	50 PCS / 80 BOX

Expansion joint profile for dry lining

Movement joint profile made of PVC with middle section made of soft PVC and two stop bars especially for easy installation in flat surfaces. Additionally with two tear-off protective strips to protect the middle section. For creating expansion joints in walls or ceilings, in accordance with the requirements of DIN 18181.

Movement absorption tension/compression:
+/- 2 mm
Notes:
PVC centre section can only be reworked with suitable coatings to a limited extent. Approval by coating manufacturer required.



Item number	Plasterboards (mm)	Length (cm)	Order number	Colour	Material	Package/ Large pack
3755	ab 9,5 mm	305	109062	10 - white	Rigid PVC with soft PVC	25 PCS / 63 BOX

Expansion joint profile for dry lining

Movement joint profile made of PVC with a flexible connection in the middle part, which enables a controlled movement of 9.5 mm. The tear-off strip protects the middle from the filler and also serves as a guide. A proper base on fire-proof walls remains necessary.

Gypsum plasterboards: 9,5 mm
Notes:
Trim-Tex 093V
093V Expansion



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
8068	1 mm	305	110405	Hard PVC	20 PCS / 80 BUN

EDGING PROFILES

Edge profile for dry lining


Edging profile for drywall made of galvanized steel, for plasterboard of 12.5 mm.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1233		300	109156	Galvanised steel	50 PCS / 47 BOX

Edge profile for dry lining


Clip-on profile made of galvanised steel sheets for various plasterboard thicknesses, connections and edges. **Colour: 10 - white**



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1120	9,5 mm	250	107948	Galvanised steel, with white basic coating	25 PCS / 99 BUN
1121	12,5 mm	250	106574	Galvanised steel, with white basic coating	25 PCS / 90 BUN
	12,5 mm	300	106575	Galvanised steel, with white basic coating	25 PCS / 70 BUN
1122	15 mm	250	107657	Galvanised steel, with white basic coating	25 PCS / 70 BUN
1123	18 mm	250	101022	Galvanised steel, with white basic coating	25 PCS / 63 BUN

Edge profile for dry lining


PVC edging profile for a plasterboard thickness of 9.5 mm. For creating precise connections and edges. **Colour: 10 - white**



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3738	9,5 mm	250	114632	Hard PVC	50 PCS / 36 BOX
3741	12,5 mm	250	114626	Hard PVC	50 PCS / 36 BOX
	12,5 mm	300	114627	Hard PVC	50 PCS / 36 BOX
3747	15 mm	250	114745	Hard PVC	50 PCS / 36 BOX
	15 mm	300	114747	Hard PVC	50 PCS / 36 BOX

Self adhesive edge profile for dry lining

Self-adhesive edging profile made of white PVC with protective lip, for 12.5 mm gypsum panels, e.g. for creating gypsum panel connections to windows and doors. Verified and tested airtightness. **Colour: 10 - white**



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3735	12,5 mm	250	102240	Hard PVC	50 PCS / 36 BOX
	12,5 mm	300	118460	Hard PVC	50 PCS / 36 BOX

EDGING PROFILES

Selfadhesive edge profile for dry lining

Self-adhesive edging profile made of white PVC with protective lip, for 12.5 mm gypsum panels, e.g. for creating gypsum panel connections to windows and doors. Verified and tested airtightness.

Colour: BF - traffic white



Item number	Of opening	Length (cm)	Order number	Material	Package/ Large pack
37361	12,5 mm	250	111699	Rigid PVC with soft PVC	50 PCS / 36 BOX
	12,5 mm	270	111953	Rigid PVC with soft PVC	50 PCS / 36 BOX
	12,5 mm	300	111954	Rigid PVC with soft PVC	50 PCS / 36 BOX

Selfadhesive fillable edging profile for dry lining

Self-adhesive PVC edging profile with protective lip for 12.5 mm panels and 13 mm EPS reveal panels, with fillable side, protective lip and tear-off adhesive tab for film covering, e.g. for forming window and door connections.

Colour: 10 - white

Processing instructions:

The movement absorption of the foam tape is restricted by the filling of the over-fillable leg.



Item number	Of opening	Length (cm)	Order number	Material	Package/ Large pack
NEW NEW NEW 37362	12,5 mm	250	118905	Rigid PVC with soft PVC	25 PCS / 24 BOX
	12,5 mm	270	118906	Rigid PVC with soft PVC	25 PCS / 24 BOX
	12,5 mm	300	118908	Rigid PVC with soft PVC	25 PCS / 24 BOX


Edge profile for dry lining

"Göppinger" profile and PVC edging profile in one!

Colour: 10 - white

Notes:

Trim-Tex 1710
1/2" Mud On J Bead




Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
3787	12,5 mm	305	102295	Hard PVC	50 PCS / 80 BOX

Corner edge profile for dry lining

PVC corner edging profile for a plasterboard thickness of 12.5 mm.

Colour: 10 - white



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
SALE SALE 3744	12,5 mm	250	101729	Hard PVC	50 PCS / 16 BUN
	12,5 mm	300	101733	Hard PVC	50 PCS / 16 BUN


Picture profile for dry lining

Picture rail made of galvanised metal sheets for 12.5-mm plasterboard panels.

White aluminium version: 91118
Notes:
Only for purely static loads of max. 0.15 kN/running metre. Not suitable for multimedia devices.



Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
1118	12,5 mm	250	101006	Galvanised steel	15 PCS / 95 BUN



Hook for Picture profile 1118/91118

High-quality aluminium picture hooks for picture rails 1118/91118.

Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
92125		3	112275	Aluminum natural	20 PCE / 99 BAG




Picture profile for dry lining

Aluminium picture rail for 12.5 mm plasterboards for wall-side installations.
Only for purely static loads. Max. load: 0.15 kN/lfm. Not suitable for multimedia devices.

Notes:
Only for purely static loads of max. 0.15 kN/running metre. Not suitable for multimedia devices.

Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
92118		300	107242	Aluminum natural	5 PCS / 264 BUN



Hook for Picture profile 92118

High-quality aluminium picture hooks for picture rail 92118.

Item number	Plasterboards (mm)	Length (cm)	Order number	Material	Package/ Large pack
92126		3	112276	Aluminum natural	20 PCE / 99 BAG



Zipper for Nylonrope

Zipper for perlon cord.

Notes:
Supplement to perlon rope with loop 92123 and 92124.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
92122		2	107246	Galvanised steel	20 PCE / 99 BOX

Nylonrope with loop

Perlon rope with loop

Notes:
Supplement to Zipper 92122.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
92123		100	107247	Nylon	20 PCE / 99 BOX
92124		200	107248	Nylon	20 PCE / 99 BOX


COMPOSITE PROFILES

Composite corner bead "WET-FLEX 100" for dry lining

Flexible, self-sticking composite profile from the roll with a water-activatable adhesive side. It's suitable for inside and outside edges in every angle positions.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37320	1 mm	3,050	114761		8 ROL / 24 BOX




Composite corner bead "OS-300" for dry lining

Paper-concealed composite profile for the production of precise edges in the drywall construction. The adjusted angle allows an expeditious treatment on 90° outside edges.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37324	1 mm	274	114451		50 PCS / 99 BOX




Composite corner bead "IS-300" for dry lining

Paper-concealed composite profile for the production of precise outside edges in the drywall construction. The adjusted angle allows an expeditious treatment on 90° outside edges.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37323	1 mm	274	114450		50 PCS / 99 BOX




Composite corner bead "BIG-STICK 300" for dry lining

Composite profile for the production of precise edges in drywall construction. The adjusted angle allows an expeditious treatment on 90° outside edges. Because of the reinforced composite head, it's able to produce a particularly stable edge.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37325	1 mm	274	114452		50 PCS / 99 BOX




Composite corner bead "MID-FLEX" for dry lining

Flexible, paper-concealed composite profile of the role, it's suitable for inside and outside edges in every angle position.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37322	1 mm	3,050	114762		10 ROL / 24 BOX



COMPOSITE PROFILES


Composite corner bead "UNO-BEAD 222" for dry lining

Flexible, paper-flocked composite profile of the role, it's situable for inside and outside edges in every angel position.

Material thickness (mm): 0,9 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37331	1 mm	3,050	114991		12 ROL / 28 BOX




Composite corner bead "ORIGINAL" for dry lining

Flexible, paper-flocked composite profile of the role, it's situable for inside and outside edges in every angel position.

Material thickness (mm): 0,8 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37329	1 mm	3,050	114990		12 ROL / 24 BOX




Composite corner bead "GOLD" for dry lining

Flexible, paper-concealed composite profile of the role, it's situable for inside and outside edges in every angel position.

Material thickness (mm): 0,8 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37340	1 mm	3,050	117043		10 ROL / 24 BOX



Composite "Fast Edge" corner bead for dry lining


Paper-concealed composite profile for the production of precise edges in the drywall construction. The adjusted angle allows an expeditious treatment on 90° outside edges.

Notes:
Trim-Tex FEP09
Large Fast Edge® Paper 9'

Processing instructions:
Inserting full-surface in the filling compound like conventional profiles with the printed side facing out. Puttying the embossed paper wing, the remaining profile leg doesn't need to be filled full-surface over.
Please notice the treatment note in the technical datasheets!



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37317	1 mm	274	118688		50 PCS / 54 BOX



Composite corner bead "Fast Edge Roll" for dry lining

Flexible, paper-concealed composite profile of the role, it's situable for inside and outside edges in every angel position. The profile will get the desired angular positon by creasing. The roll material allows an individual adjustment of the profile to the edge and thus reduces waste and costs.

Material thickness (mm): 0,8 mm

Notes:


Trim-Tex FE275R

Fast Edge® Roll 2.75"

Processing instructions:

Inserting full-surface in the filling compound like conventional profiles with the printed side facing out. Filling the embossed paper wing in, the remaining profile leg doesn't need to be filled full-surface over.

Please notice the treatment note in the technical datasheets!




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37318	1 mm	3,050	118689		10 ROL / 12 BOX

Composite corner bead "ARCH-FLEX 100" for arches in dry lin.

Flexible composite profile with incised legs for the production of precise edges in curved or arched constructions, situable for inside and outside edges in every angel adjustments.

Material thickness (mm): 0,8 mm




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37327	1 mm	3,050	114764		12 ROL / 20 BOX

Composite corner bead "PERFECT-90°" for dry lining

Flexible, paper-concealed composite profile of the role, it's situable for perfect 90° inside edges.

Material thickness (mm): 0,6 mm




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37333	1 mm	3,050	114993		12 ROL / 30 BOX

Composite strip "TUFF-TAPE" for inside edges and joints

Flexible, paper-flocked composite profile of the role, it's situable for inside edges in every angel position and panel joints.

Material thickness (mm): 0,8 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37339	1 mm	3,050	115031		12 ROL / 24 BOX

COMPOSITE PROFILES

Composite profile "CRACK-TAPE" for drywall repairs

Flexible paper-flocked composite strip from the roll for repairing stress cracks on surfaces and edges.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37347	1 mm	3,050	120424		12 ROL / 24 BOX



Composite profile "TILE-TAPE" for edges in wet areas

Flexible composite profile from the roll, for use under tiles and slabs, to prevent leaks caused by cracking on inner and outer edges at all angles.

Material thickness (mm): 0,8 mm

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37348	1 mm	3,050	120425		12 ROL / 24 BOX




Composite stop an connecting bead "L-BEAD 300" for dry lin.

Flexible composite profile for the production of precise connections and terminations in drywall construction. The profile of the role will get the desired angular positon by creasing.

Material thickness (mm): 0,8 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37326	1 mm	3,050	114763		12 ROL / 24 BOX




Composite stop and connecting bead "EDGE-TAPE"

Flexible, paper-concealed composite profile for making perfect connections to windows or other wall connections in drywall construction.

Material thickness (mm): 0,8 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37334	1 mm	3,050	114994	paper	12 ROL / 20 BOX



"ROLL-PATCH 5.5" for drywall repairs

Flexible composite strip from the roll for flat filling.

Material thickness (mm): 0,6 mm
Product width: 140 mm




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37328	1 mm	610	114765		6 ROL / 24 BOX



Composite corner bead "WET-STICK 90" for dry lining

Self-sticking composite profile with a water-activatable adhesive side for the production of precise edges in the drywall construction. The adjusted angle allows an expeditious treatment on 90° outside edges.

Material thickness (mm): 0,8 mm



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
37321	1 mm	274	114448		50 PCS / 64 BOX

JOINT COVER STRIPS

Joint cover strips

Self-adhesive fabric joint cover strips 50 mm as a reinforcement grid for filling the joints of panel joints and repairing cracks in plastered surfaces.

Mesh size: 2 x 2 mm
Grammage: 55 g/m²
Processing instructions:
According to normative specifications, panel joints must always be completely filled with filler.



Item number	Width (mm)	Length (cm)	Order number	Material	Color	Package/ Large pack
14950	50	15,300	119709	Glass fiber	10 - white	12 PCE / 18 BOX
14951	50	9,000	119710	Glass fiber	10 - white	24 PCE / 25 BOX
14952	50	4,500	119711	Glass fiber	10 - white	54 PCE / 18 BOX
14953	50	2,500	119712	Glass fiber	10 - white	60 PCE / 18 BOX
14954	50	2,000	119713	Glass fiber	10 - white	60 PCE / 18 BOX
14955	100	9,000	119714	Glass fiber	10 - white	12 PCE / 25 BOX
14956	100	4,500	119715	Glass fiber	10 - white	27 PCE / 18 BOX

Self-adhesive spatula fabric

Self-adhesive filler fabric, for the reinforcement of filled surfaces indoors. Can be used as a reinforcement grid when filling joints and in the area of cracks, as well as for the renovation of cracked surfaces. Alkaline-resistant, non-shifting, plasticizer-free.

Mesh size: 2 x 2 mm
Grammage: 55 g/m²
Notes:
Properties: Alkali-resistant, displacement-resistant, plasticiser-free



Item number	Fabric dimension	Order number	Material	Color	Package/ Large pack
14957	100 cm x 100 m	119853	Glass fiber	10 - white	100 M2 / 48 ROL

PROFILE ADHESIVE

Spray adhesive GLUKON prime

Adhesive and contact adhesive for the assembly of filler profiles made of composite material, rigid PVC or metal on various substrates such as plasterboard.
Also suitable for bonding PE foils, vapor barriers, insulation materials such as XPS/EPS, PUR/PIR, etc.

Item number	Description	Order number	Contents	Package/ Large pack
1430	Spray adhesive GLUKON prime	118502	Spray can 500 ml	12 PCE / 114 BOX



Spray can handle

Handle for ergonomic processing with the spray can. Good tactile pressure point due to built-in spring mechanism. Prevents hand fatigue. Suitable for most commercially available spray cans.

Notes:
Material: impact-resistant plastic

Item number	Description	Order number	Contents	Package/ Large pack
1423	Spray can handle	118515		6 PCE / 99 BOX
	Spray can handle	119046		144 PCE / 99 BOX



Spray adhesive GLUKON prime

Adhesive and contact adhesive for mounting of filler profiles made of composite, rigid PVC or metal on various substrates such as e.g. plasterboard. Also suitable for bonding of PE foils, vapor barriers, insulating materials such as XPS/EPS, PUR/PIR, etc.

Notes:
Only to be used with the following system components! Premium gun Art. 1428, hose Art. 1427 or Art. 1426.

Item number	Description	Order number	Contents	Package/ Large pack
1429	Spray adhesive GLUKON prime	118503	Pressure vessel 13 kg	1 PCE / 12 BOX



Premium Pistol

Premium spray gun as system component for the pressure tank (Art. 1429), incl. nozzle. Particularly robust due to full metal construction, easy spray jet adjustment for maximum precision and of precision and reliability in daily use.

Item number	Description	Order number	Contents	Package/ Large pack
1428	Premium Pistol	118513		1 PCE / 99 BOX



Hose for pressure tank

Reinforced high-pressure hoses for a secure and durable connection of the premium gun to the pressure vessel. The length of the hose increases the radius of action and enables thus efficient working.

Notes:
Length: 3.70 m

Item number	Description	Order number	Contents	Package/ Large pack
1426	Hose for pressure tank	118512	3,70 m	1 PCE / 99 BOX



PROFILE ADHESIVE

Hose for pressure tank

Reinforced high pressure hose for a safe and long-lasting connection of the premium gun to the pressure vessel. The length of the hose increases the operating radius and thus enables efficient operation.

Notes:
Length: 5.5 m



Item number	Description	Order number	Contents	Package/ Large pack
1427	Hose for pressure tank	118511	5,50 m	1 PCE / 99 BOX

Lance 50 cm

Lance made of solid metal for the extension of the premium gun by 50 cm. For ergonomic, back-friendly work on floors working on floors, walls and ceilings. Quick and stepless adjustment of the spray jet width.

Notes:
Length: 50 cm



Item number	Description	Order number	Contents	Package/ Large pack
1425	Lance 50 cm	118514		1 PCE / 99 BOX

Transport trolley

Stable transport cart with rollers with stable holding basket for the pressure vessel.

Notes:
With smooth-running swivel castors (2 with parking brake). Height-adjustable guide handle.



Item number	Description	Order number	Contents	Package/ Large pack
1424	Transport trolley	118517		1 PCE / 1 BOX

Citrus cleaner

Citrus cleaning spray, highly effective cleaning agent on a natural basis. PH neutral, non-corrosive mode of action. Particularly suitable for cleaning closed-pore and colorfast surfaces.

Notes:
Do not use as a remover! Carry out a preliminary test in a concealed location.



Item number	Description	Order number	Contents	Package/ Large pack
1422	Citrus cleaner	118516	500 ml	12 PCE / 99 BOX

NEW

Compound applicator "MUD-PRO MP2-MOUNTED"

Material applicator "Mud-Pro MP 2" for an efficient and cost-saving processing of composite profiles for inside and outside edges. Allows an even application of material directly to the profile and can be used for paper-laminated composite profiles and composite profiles, which are applied with putty. The application device consists of a solid and durable stainless steel construction. No daily cleaning required, after completion of work, the wings are folded and the application device soaked in sufficient water.

The material applicator Mud-Pro MP2 includes the upper and lower bucket as well as the applicator.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1472		34	114441		1 PCE / 24 BOX

Outside rolling tool 90° "OUTSIDE ROLLING-TOOL OSR 300"

Outer edge roller "Outside Rolling Tool OSR 300", for pressing paper-laminated composite profiles at 90 ° outer edges. The outer edge roller in conjunction with the extension pole "Extension Pole EP" 1478 allows ergonomic and efficient processing and guarantees the required uniform contact pressure.

Suitable for product: 37324; 37322; 1478



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1473		8	114442		1 PCE / 999 BOX

Outside rolling tool 90° "OUTSIDE ROLLING-TOOL WSR"

External edge roller "Outside Rolling Tool WSR" is used for pressing composite profiles at 90 ° outer edges and is particularly suitable for the wet profiles "Wet-Flex 100" 37320 and "Wet-Stick 90" 37321. The outer edge scooter in conjunction with the extension rod "Extension Pole EP" 1478 enables ergonomic and efficient processing and guarantees the required uniform contact pressure.

Suitable for product: 37327; 37325; 37321; 37320; 1478



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1474		8	114443		1 PCE / 999 BOX

Inside rolling tool 90° "INSIDE ROLLING-TOOL ISR"

Inside edge roller "Inside Rolling Tool ISR", for pressing paper-laminated composite profiles and composite profiles at 90 ° inside edges. The inner edge scooter in conjunction with the extension pole "Extension Pole EP" 1478 enables ergonomic and efficient processing and guarantees the required uniform contact pressure.

Suitable for product: 37327; 37323; 37322; 1478



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1477		8	114444		1 PCE / 999 BOX

Extension pole "EXTENSION POLE EP"

The extension pole supplemented the inner and outer edge. The pole is 91 to 152 cm long and extendable by steps of 15 cm. The comfort handel enabled a excellent handling.

Suitable for product: 1477; 1474; 1473



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1478		8	114445		6 PCE / 999 BOX

Folding tool "FLEX-FOLDER"

The "Flex-Folder" folding tool is used to adjust the angle of paper-laminated composite profiles and composite profiles from the roll. For efficient and quick preparation of the flexible composite profiles.

Suitable for product: 37327; 37326; 37322; 37320



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1479		8	114446		12 PCE / 999 BOX

MUD-PRO MP2 spare parts kit

Spare parts set for the Mud-Pro MP 2 material applicator. Contains a shaped piece for the profile insert and a shaped piece with teeth for the material outlet. The material outlet determines the amount of filler that is applied to the composite profile and thus ensures efficient and cost-saving processing of composite profiles for inner and outer edges.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1468		8	115673		1 PCE / 20 BOX

Edge roller set ISR-OSR-SSR

Edge roller set consisting of:
- Outside edge roller "Outside Rolling Tool OSR"
- Inside edge roller "Inside Rolling Tool ISR"
- Single side roller "Single Side Rolling Tool SSR"
for pressing composite profiles onto inner and outer edges. In conjunction with the extension pole "Extension Pole EP" 1478, the roller tools enable ergonomic and efficient processing and guarantee the required uniform contact pressure.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1469		37	115573		4 PCE / 25 BOX

Profile shear

Special cutter with a premarked template for ensuring precise cutting of PVC profiles at a right angle.



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1452		26	102376		50 PCE / 16 BOX

Sales racks Protektor


Protector sales display for rod and roll goods. **Material:** Aluminum



Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1500		120	117080	Aluminum	1 PCE / 1 BOX



PRIMERS THAT ENSURE CLEAN RESULTS

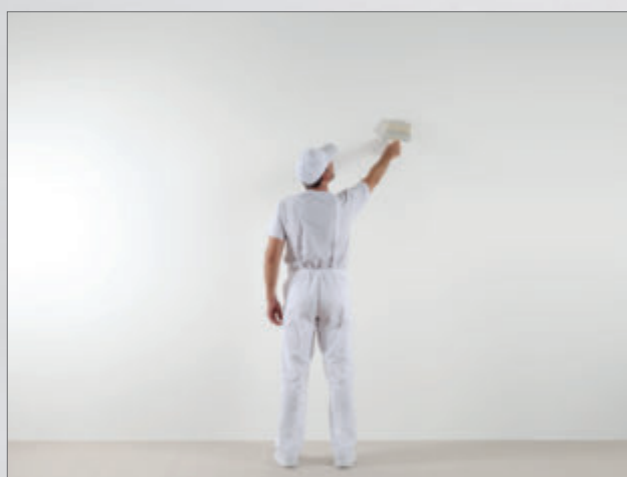

Whether working with plasterboard, concrete or masonry, the construction chemistry product range from Protektor provides the perfect basis for achieving optimal results. Creating the proper substrate conditions is essential for any professional painting, plastering or wallpapering job. Protektor construction chemistry offers a product range that provides perfect priming tailored to the varied requirements of differing substrates. Our various primers ensure that you have a surface for all smooth, highly absorbent, poorly adhering or bleeding substrates. Water-based, solvent-free and eco-friendly bonding primers – for a professional result.

- **Betonkontakt (Concrete contact)** – Bonding coat on smooth. Concrete Bonding coat for gypsum plaster, gypsum-based render systems and lime plaster.
- **Aufbrennsperre (Absorbent substrate primer)** – Reduces suction. Primer for substrates with high or varying absorbency.
- **Putzgrund (Plaster primer)** – white-pigmented bonding primer. Containing quartz e.g. before the application of decorative plasters.
- **Tiefengrund (Deep primer)** – solvent-free, unpigmented, deep penetrating primer. Primer for stabilising chalky and sandy substrates.
- **Sperrgrund (Barrier primer)** – isolating and sealing primer For sealing bleed-through substances e.g. for decorative plasters and renders.



PERFEKT VORBEREITET

PROTEKTOR BAUCHEMIE

Die Gipsarten, Beton oder Mauerwerk, mit Baucheimie von Protektor haben Sie die Grundlage für ein optimales Ergebnis. Die Schaffung der richtigen Untergrundvoraussetzung ist ein Muss für professionelles Malen, Putzen und Tapezierarbeiten. Protektor Baucheimie bieten Ihnen die richtigen Lösungen für eine perfekte Grundierung abhängig von der jeweiligen Anforderung des Untergrundes. Mit unserer universell einsetzbaren Baucheimie haben Sie jetzt die vollständige Lösung für alle glatten, stark saugenden, zu weitgehend oder durchschlagenden Untergründe: Mauerwerk, Betonputz und unverputztes Mauerwerk, Gipsputz, Gipsbinder, Gipsanstrich – für ein optimales Ergebnis.

- ✓ **Betonkontakt** – Haftbrücke auf glatten Beton
- ✓ **Aufbrennsperre** – Reduzierung des Sauggrades
- ✓ **Putzgrund** – Haftbrücke auf grobkörnigen Untergründen
- ✓ **Tiefengrund** – Quarzgefüllte, weiß pigmentierte Baucheimie
- ✓ **Sperrgrund** – Isolationsschicht, ungelappte Feinmasse
- ✓ **Sperrgrund** – Isolationsschicht, ungelappte Feinmasse

www.protektor.com



Concrete contact

Bonding bridge on an even floor. Bonding bridge for system plaster and adhesive binder on smooth concrete.

- alkali resistant
- red pigmentation
- for interiors
- ready to use or as a concentrate.



Item number	Description	Order number	Usage	Contents	Pallet contents
1440	Concrete contact	115141	Approx. 200 - 300 g/m ² depending on substrate.	20 kg	32 BUC
1441	Concrete contact	114571	Approx. 200 - 300 g/m ² depending on substrate.	6 kg	70 BUC

Primer absorb. substr.

Reduces absorbency. Apply primer to substrates with high or varying absorbency.

- high alkali-resistance
- yellow pigmentation
- for interiors and exteriors
- ready to use.



Item number	Description	Order number	Usage	Contents	Pallet contents
1442	Primer absorb. substr.	115142	Approx. 100–200 ml/m ² depending on substrate.	15 L	32 BUC
1482	Primer absorb. substrate Concentrate	115143	Approx. 50–100 ml/m ² (concentrate) depending on the substrate.	15 L	32 BUC

Barrier primer

Isolation and sealing primer. Primer for critical mineral, substrates that show through, e.g. for decorative plaster.

- specially made to prevent against bleeding materials
- improves mechanical bond
- white pigmentation
- for interiors and exteriors
- ready to use.



Item number	Description	Order number	Usage	Contents	Pallet contents
1448	Barrier primer	115140	Approx. 200–300 g/m ² depending on substrate.	15 kg	32 BUC
1449	Barrier primer	114579	Approx. 200–300 g/m ² depending on substrate.	6 kg	70 BUC

Plaster base

Acrylic pigmented undercoat Bonding agent, e.g. prior to applying decorative plasters.

- evens the absorbency of the substrate
- breathable
- weatherproof
- for interior and exteriors
- ready to use and as a concentrate



Item number	Description	Order number	Usage	Contents	Pallet contents
1444	Plaster base	115144	Approx. 200–300 g/m ² depending on substrate.	20 kg	32 BUC
1445	Plaster base	114575	Approx. 200–300 g/m ² depending on substrate.	6 kg	70 BUC

Penetrating primer LF

Solution-free primer. Non-pigmented primer for strengthening chalky and sandy substrates.

- for mineral substrates
- reduces and evens out absorbency
- for interiors and exteriors
- ready to use.

Item number	Description	Order number	Usage	Contents	Pallet contents
1446	Penetrating primer LF	115443	Approx. 100–250 ml/m² depending on substrate.	10 L	50 CAN
1447	Penetrating primer LF	115444	Approx. 100–250 ml/m² depending on substrate.	5 L	96 CAN



Concrete contact Eco

Item number	Description	Order number	Usage	Contents	Pallet contents
14403	Concrete contact Eco	119944		20 kg	32 BUC



Primer absorb. substr. eco

Item number	Description	Order number	Usage	Contents	Pallet contents
14423	Primer absorb. substr. eco	119946		15 L	32 BUC



Plaster base eco

Item number	Description	Order number	Usage	Contents	Pallet contents
14443	Plaster base eco	119947		20 kg	32 BUC



Penetrating primer LF eco



Item number	Description	Order number	Usage	Contents	Pallet contents
14463	Penetrating primer LF eco	119948		10 L	60 CAN



THE RIGHT CEILING FOR EVERY ROOM

Ready-made solutions of superb quality: flexibility and a wide range of installation options make this an outstandingly reliable system which is quick to install.

The right metal substructure provides the outline for your dream solution. This gives sustainable stability. Our substructures for suspended ceilings are chosen by many architects because of the large degree of freedom they offer in creating plans and in the choice of materials.

STANDARD CEILINGS AND WALLS


PRODUCT CLASS 6000

C-ceiling profile with square return

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed length on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5118	C 60-27-06	118	100117	60	0,570	16 PCS / 16 BUN




C-ceiling profile with square return

Application area: suspended ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5120	C 60-27-06	260	110004	60	0,570	12 PCS / 15 BUN
	C 60-27-06	300	110006	60	0,570	12 PCS / 15 BUN
	C 60-27-06	310	110007	60	0,570	12 PCS / 15 BUN
	C 60-27-06	400	110008	60	0,570	12 PCS / 15 BUN




C-ceiling profile with square return 0,7 mm

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5116	C 60-27-07	400	109998	60	0,660	12 PCS / 15 BUN




C-ceiling profile with round return

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5117	C 60-27-06	260	109999	60	0,570	12 PCS / 15 BUN
	C 60-27-06	300	110001	60	0,570	12 PCS / 15 BUN
	C 60-27-06	310	110002	60	0,570	12 PCS / 15 BUN
	C 60-27-06	400	110003	60	0,570	12 PCS / 15 BUN




STANDARD CEILINGS AND WALLS
PRODUCT CLASS 6000

C-ceiling profile smooth with square return

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Acceptance only in full bulk bundles.
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5121	C 60-27-06	400	109895	60	0,570	12 PCS / 15 BUN




C-ceiling profile smooth with square return

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Acceptance only in full bulk bundles.
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5128	C 60-27-06	400	109896	60	0,570	12 PCS / 15 BUN




C-ceiling profile smooth with round return

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Acceptance only in full bulk bundles.
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5101	C 60-27-06	400	112057	60	0,570	12 PCS / 15 BUN




C-ceiling profile smooth with round return

Application area: hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Acceptance only in full bulk bundles.
Fixed lengths on request.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5111	C 60-27-06	400	110098	60	0,570	12 PCS / 15 BUN




U connection profile

Application area: connection profile for hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
White coated see art. no. 53244
Black coated see art. no. 58122

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5244	U 28-27-06	300	109994	28,5	0,380	16 PCS / 28 BUN
	U 28-27-06	400	109995	28,5	0,380	16 PCS / 28 BUN




STANDARD CEILINGS AND WALLS
PRODUCT CLASS 6000

U connection profile

Application area: connection profile for hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
White coated see art. no. 53168
Black coated see art.no. 58168

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5168	U 28-45/27-06	300	109947	28	0,469	16 PCS / 20 BUN




U-connection profile for constructions at same level

Application area: connection profile for level ceiling constructions for attaching safety cross connectors no. 6116.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5179	UD 28-45/27-06	300	100732	32	0,510	16 PCS / 20 BUN




Hat ceiling profile

Application area: ceilings and wall facings with very low installation height.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18168-2
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5114	48-15,5-06	400	100112	48	0,471	10 PCS / 20 BUN




Hat ceiling profile

Application area: ceilings and wall facings with very low installation height.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18168-2

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
50198	75 - 15,5	400	114770	75	0,655	10 PCS / 20 BUN




U connection profile for hat ceiling profile

Application area: connection profile for hat profiles (e.g. 5114 and 50198) on hanging ceilings and wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5167	UD 17,2	300	100665	17,2	0,307	12 PCS / 50 BUN




STANDARD CEILINGS AND WALLS
PRODUCT CLASS 6000

C-stud

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5211	C 50-50-06	250	109948	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	260	109949	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	275	109950	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	300	109951	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	325	109952	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	350	109953	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	375	109954	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	400	109955	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	450	109957	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	500	109958	48,8	0,706	8 PCS / 16 BUN
	C 50-50-06	600	109959	48,8	0,706	8 PCS / 16 BUN




C-stud

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5215	C 75-50-06	250	109961	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	260	109962	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	275	109963	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	300	109964	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	325	109965	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	350	109966	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	375	109968	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	400	109969	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	450	109971	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	500	109973	73,8	0,820	8 PCS / 12 BUN
	C 75-50-06	600	109975	73,8	0,820	8 PCS / 12 BUN



STANDARD CEILINGS AND WALLS


PRODUCT CLASS 6000

C-stud

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5216	C 100-50-06	250	109976	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	260	109977	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	275	109978	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	300	109979	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	325	109980	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	350	109981	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	375	109982	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	400	109983	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	450	109985	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	500	109987	98,8	0,929	8 PCS / 8 BUN
	C 100-50-06	600	109989	98,8	0,929	8 PCS / 8 BUN




C-stud

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5141	C 125-50-06	300	109943	123,8	1,066	8 PCS / 8 BUN
	C 125-50-06	400	109944	123,8	1,066	8 PCS / 8 BUN
	C 125-50-06	500	109946	123,8	1,066	8 PCS / 8 BUN
	C 125-50-06	600	113770	123,8	1,066	8 PCS / 8 BUN




C-stud

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5224	C 150-50-06	270	115623	148,8	1,161	4 PCS / 12 BUN
	C 150-50-06	400	109990	148,8	1,161	4 PCS / 12 BUN
	C 150-50-06	600	109991	148,8	1,161	4 PCS / 12 BUN




STANDARD CEILINGS AND WALLS
PRODUCT CLASS 6000

U-track

Application area: connection profile for walls/wall faces or for free-spanning ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5230	U 50-40-06	260	100854	50	0,580	8 PCS / 20 BUN
	U 50-40-06	300	109890	50	0,580	8 PCS / 20 BUN
	U 50-40-06	400	100892	50	0,580	8 PCS / 20 BUN




U-track

Application area: connection profile for walls/wall faces or for free-spanning ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5233	U 75-40-06	260	100951	75	0,690	8 PCS / 15 BUN
	U 75-40-06	300	109889	75	0,690	8 PCS / 15 BUN
	U 75-40-06	400	100952	75	0,690	8 PCS / 15 BUN




U-track

Application area: connection profile for walls/wall faces or for free-spanning ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5234	U 100-40-06	260	100954	100	0,806	8 PCS / 10 BUN
	U 100-40-06	300	109891	100	0,806	8 PCS / 10 BUN
	U 100-40-06	400	100957	100	0,806	8 PCS / 10 BUN




U-track

Application area: connection profile for walls/wall faces or for free-spanning ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5248	U 125-40-06	400	109997	125	0,880	4 PCS / 15 BUN




U-track

Application area: connection profile for walls/wall faces or for free-spanning ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5247	U 150-40-06	400	109996	150	0,980	4 PCS / 15 BUN



STANDARD CEILINGS AND WALLS


PRODUCT CLASS 6000

U Reinforcing profile

Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5129	UA 50-40-20	250	109897	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	260	109898	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	275	109899	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	300	109900	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	325	109901	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	350	109902	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	375	109903	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	400	109904	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	450	109906	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	500	109907	48,8	1,770	6 PCS / 15 BUN
	UA 50-40-20	600	113734	48,8	1,770	6 PCS / 15 BUN




U Reinforcing profile

Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5130	U 75-40-20	250	109908	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	260	109909	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	275	109910	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	300	109911	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	325	109912	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	350	109913	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	375	109914	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	400	109915	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	450	109917	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	500	109919	73,8	1,990	4 PCS / 25 BUN
	U 75-40-20	600	109921	73,8	1,990	4 PCS / 25 BUN



STANDARD CEILINGS AND WALLS


PRODUCT CLASS 6000

U Reinforcing profile

Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5131	U 100-40-20	260	100914	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	275	102974	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	300	100513	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	325	103589	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	350	100522	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	375	104128	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	400	100528	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	450	103465	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	500	103466	98,8	2,485	4 PCS / 15 BUN
	U 100-40-20	600	103468	98,8	2,485	4 PCS / 15 BUN




U Reinforcing profile

Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5132	U 125-20	400	109938	123,8	2,870	2 PCS / 30 BUN
	U 125-20	500	109939	123,8	2,870	2 PCS / 30 BUN
	U 125-20	600	109940	123,8	2,870	2 PCS / 30 BUN




U Reinforcing profile

Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5140	U 150-20	400	114620	148,8	3,310	2 PCS / 24 BUN
	U 150-20	500	114603	148,8	3,310	2 PCS / 24 BUN
	U 150-20	600	114605	148,8	3,310	2 PCS / 24 BUN
	U 150-20	700	118451	148,8	3,310	2 PCS / 24 BUN



STANDARD CEILINGS AND WALLS


PRODUCT CLASS 6000

U Reinforcing profile unperforated

Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5149	UA 50-20	300	112385	48,8	1,770	6 PCS / 15 BUN
	UA 50-20	400	112386	48,8	1,770	6 PCS / 15 BUN
5150	UA 75-20	300	112387	73,8	1,990	4 PCS / 25 BUN
	UA 75-20	400	112388	73,8	1,990	4 PCS / 25 BUN
5151	UA 100-20	300	112389	98,8	2,485	4 PCS / 15 BUN
	UA 100-20	400	112390	98,8	2,485	4 PCS / 15 BUN
5152	UA 125-20	400	114944	123.8	2,870	2 PCS / 30 BUN




U-connecting profile

Application area: connection profile for UA profiles on free-spanning ceilings.

Material: S320 GD+Z
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5512	for UA 50	400	115983	52,8	1,939	1 PCS / 198 PCS
5513	for UA 75	400	111302	77,8	2,496	1 PCS / 98 PCS
5514	for UA 100	400	111303	102,8	2,865	1 PCS / 108 PCS
5515	for UA 125	400	111304	127,8	3,155	1 PCS / 100 PCS
5516	for UA 150	400	111306	152,8	3,548	1 PCS / 100 PCS





ECOLOGY MEETS ECONOMICS

A well-designed profile enables rapid installation as well as making it simple to create cut-outs for the passage of bulky cable or pipes. While maintaining full stability and the quality of the profiles and the system. This profile range which has won multiple awards meets the requirements of SPEC 91311 and has been granted an EPD by the IBU Institute for Construction and Environment.

You can find further details in our special brochure.

MAXI-TEC®
HIGHTECH PROFILES 



The Environmental Product Declaration – a multiple tool for sustainable success.



Extensive information platform about sustainable construction. PROTEKTOR is listed in the DGNB (German Sustainable Building Council) Navigator.

**Protektor
Sustainability**
View now »




MAXI-TEC U-track

Application area: connection profile for walls/wall faces.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5030	U 50-06	400	114784	50	0,524	8 PCS / 16 BUN
5033	UW 75-06	400	114783	75	0,592	8 PCS / 12 BUN
5034	U 100-06	400	114782	100	0,791	8 PCS / 8 BUN




MAXI-TEC C-stud

Application area: stand profile for walls/wall faces.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5011	C 50-06	300	114795	48,8	0,638	8 PCS / 16 BUN
	C 50-06	400	114793	48,8	0,638	8 PCS / 16 BUN
5015	C 75-06	300	114789	73,8	0,706	8 PCS / 15 BUN
	C 75-06	400	114791	73,8	0,706	8 PCS / 12 BUN
5016	C 100-06	300	114787	98,8	0,770	8 PCS / 8 BUN
	C 100-06	400	114785	98,8	0,770	8 PCS / 10 BUN





ATTUNED TO YOUR NEEDS

PROTEKTOR offers many specialist products to enable creating superstructures, curves, arches and connections.

For example the GR-connection profile for convex and/or concave curved wall and ceiling constructions, RS-wall profiles or special profiles for door frames.

SPECIAL PRODUCTS


PRODUCT CLASS 6640

U connection profile white

Application area: connection profile for hanging ceilings with white shadow joints.
White outer side, RAL 9010.

Material: Galvanised steel, with white basic coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
53244	U 28-27	300	112189	28,5	0,380	16 PCS / 28 BUN




U connection profile white with uneven wings

Application area: connection profile for hanging ceilings with white shadow joints.
White outer side, RAL 9010.

Material: Galvanised steel, with white basic coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
53168	U 28-45 /27	300	112190	28	0,469	16 PCS / 20 BUN




Grid angle

For universal uses.
*Distance between perforations may vary due to production constraints.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
DIN test standard: DIN 18168-2
Notes:
Regular perforation only on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5178	28 x 28 mm	400	100726	28	0,760	8 PCS / 25 BUN




Inside corner profile 90°LWi

Application area: for the inner corner of walls.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5170	LWi 60 x 60	300	100689		0,631	10 PCS / 42 BUN



Flexible angle profile

Area of application for forming wall corners or for transitions in roof slopes. The flexible angle profile can be cut to the desired length on site and bent by hand to the required angle positions.

Material: Galvanised steel
Material thickness (mm): 0,6 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5450	100 mm	2,500	117684	100	0,471	1 PCE / 44 BOX




SPECIAL PRODUCTS
PRODUCT CLASS 6640

U-wall profile UW

Application area: connection profile for walls/wall faces with sliding ceiling connections.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5236	U 60 x 50 x 60	400	100960	50	0,918	4 PCS / 100 BUN
5237	U 60 x 75 x 60	400	100962	75	1,055	4 PCS / 70 BUN
5238	U 60 x 100 x 60	400	100963	100	1,192	4 PCS / 50 BUN
NEW 5239	U 60 x 125 x 60	400	119413	125	1,320	4 PCS / 50 BUN




Drywall furring profile

Application area: mounting construction panels on walls/wall facings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005

Do not use as a ceiling sub-construction!

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5112	48-15.5	230	100109	48	0,414	10 PCS / 20 BUN




Hat profile

Application area: walls/wall facings for attaching construction panels as a clamp system or as a mounting rail for nut/spring clips.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5143	13 x 26 mm	300	100608	26	0,231	15 PCS / 100 BUN




Hat profile

Application area: walls/wall facings for mounting construction panels as a clamping system.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5156	13 x 38 mm	300	100620	38	0,284	15 PCS / 80 BUN




Covering strip

Application area: walls/wall facings as a coverage profile in connection with hat profile no. 5143.

Material: PVC
Notes:
Special colours from 1000 m on request

10 white, 22 grey

Item number	Description	Length (cm)	Colour	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
	12 x 33 mm	300	10 - white	100073	33	0,140	15 PCS / 95 BUN
3762	12 x 33 mm	300	BN - light grey	116985	33	0,140	15 PCS / 95 BUN
	12 x 33 mm	300	91 - anthracite	118481	33	0,140	15 PCS / 95 BUN



SPECIAL PRODUCTS

PRODUCT CLASS 6640


Covering strip

Application area: walls/wall facings as a coverage profile in connection with hat profile no. 5156.

Material: PVC

10 white

Item number	Description	Length (cm)	Colour	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
3765	12 x 56 mm	300	10 - white	112188	56	0,210	15 PCS / 52 BUN




Covering strip E6 EV 1 anodised

Application area: walls/wall facings as a coverage profile in connection with hat profile no. 5143.

Material: Aluminum, anodized

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6578	8 x 37 mm	300	116478	37	0,240	15 PCS / 100 BUN



Filling profile


Application area: walls/wall facings as a coverage profile in connection with hat profile no. 5143 or 6549.

Material: PVC

Material thickness (mm): 1,4 mm

10 white

Item number	Description	Length (cm)	Colour	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
3655	for Item no. 6549	300	10 - white	103340	10	0,052	20 PCS / 262 BUN




Tongue and groove board pivot clip galvanised

Application area: ceilings and walls for tongue and groove boards in combination with hat profile no. 5143.

Material: Galvanised steel

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6146	groove 3 mm	101396		0,006	250 PCE / 80 BOX
6144	groove 4 mm	101391		0,006	250 PCE / 80 BOX
6148	groove 5 mm	100862		0,006	250 PCE / 80 BOX

SALE




Aluminium hat profile anodised E6 EV1

Application area: walls/wall facings for mounting construction panels as a clamping system.

Material: Aluminum, anodized

Material thickness (mm): 1,5 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6549	9 x 30 mm	300	118341	30	0,200	20 PCS / 66 BUN




SPECIAL PRODUCTS

PRODUCT CLASS 6640

Substructure reinforcement sheets

Application area: walls/wall linings for attaching wall-mounted loads such as wall cabinets, shelves, etc.

Material: Galvanised steel
Material thickness (mm): 0,7 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6670	625x300 mm	62	102103		1,200	1 PCE / 20 PCE

Beam levelling bracket profile

Application area: exposed beam ceilings or attic extensions.
Article 5580 must be ordered separately if needed.
Alternatively, the film can be fixed with a suitable double-sided adhesive tape.

Material: Galvanised steel
Material thickness (mm): 0,7 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5570	100 x 30 mm	260	112183	30	0,731	8 PCS / 40 BUN

Piping profile

Beading profile for attaching vapour barrier connected with levelling bracket 5570.

Material: PVC
Notes:
60 keder profiles are required per bundle of beam levelling angle profiles.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5580	80 mm	8	107340		0,001	60 PCE / 60 BAG

Beam levelling adapter

Application area: extending installation height of beam levelling bracket profile up to max. 165 mm, plus beam/rafter height.

Material: Galvanised steel
Material thickness (mm): 0,8 mm




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5575	for 5570	115039		0,038	100 PCE / 30 BOX

Angle profile

Can be used universally.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Notes:
Further angle measurements available on request.



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5161	28 x 28 mm	300	106601	28	0,237	20 PCS / 50 BUN
5162	41 x 41 mm	400	100654	40	0,351	20 PCS / 50 BUN


SPECIAL PRODUCTS
PRODUCT CLASS 6640

Angle profile

Can be used universally.

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: EN 14195:2005
Notes:
Further angle measurements available on request.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5186	30 x 50 mm	300	110249	50	0,428	20 PCS / 50 BUN




Angle profile

Can be used universally.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 14195:2005
Notes:
Further angle measurements available on request.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5189	30 x 30 mm	300	110251	30	0,451	10 PCS / 50 BUN
5165	40 x 20 mm	300	100663	20	0,451	8 PCS / 60 BUN
5177	40 x 40 mm	300	100723	40	0,620	10 PCS / 50 BUN
5194	50 x 50 mm	300	110654	50	0,777	10 PCS / 40 BUN




Sheet steel panel

The Protektor sheet steel panel made of galvanised sheet steel is used for the construction of fire walls in stud construction or as a reinforcing layer in the construction of burglar-resistant walls.

Material: Galvanised steel
Material thickness (mm): 0,5 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 5453	1.000 mm x 2.000 mm	120255		3,925	2 M2 / 100 PCE



Aluminium inspection flap with 12.5 mm GKBI

Application area for ceiling and wall as opening for maintenance and installation work. With 12.5 mm GKBI, filled.

Material: Plasterboard with aluminium
Notes:
Construction opening dimension approx. 3 - 5 mm larger than nominal dimension

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6765	20 x 20 cm	118909		0,900	1 PCE / 60 BOX
6766	30 x 30 cm	118915		1,600	1 PCE / 56 BOX
6767	40 x 40 cm	118916		2,440	1 PCE / 52 BOX
6768	50 x 50 cm	118917		3,500	1 PCE / 30 BOX
6769	60 x 60 cm	118918		4,750	1 PCE / 13 BOX



SPECIAL PRODUCTS

PRODUCT CLASS 6640

Inspection flap made of painted steel with snap lock

Application area for ceiling and wall as opening for maintenance and installation work.
White lacquered.

Material: Galvanised steel with coating
Notes:
Construction opening dimension approx. 3 - 5 mm larger than nominal dimension

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6727	20 x 20 cm	114926		0,518	1 PCE / 116 BOX
6732	30 x 30 cm	114927		1,498	1 PCE / 12 BOX
6733	40 x 40 cm	114928		2,750	1 PCE / 56 BOX
6735	50 x 50 cm	114929		2,330	1 PCE / 14 BOX
6736	60 x 60 cm	114930		3,018	1 PCE / 32 BOX




Wall niches with special waterproof coating

Can be used for both drywall constructions and solid walls. Mounting element for niche-shaped storage spaces, tileable and waterproof

Material: Polystyrene

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
57260	200x400	119551		1,500	1 PCE / 40 BOX
57261	300x600	119552		1,800	1 PCE / 20 BOX



multifunctional adhesive and sealant

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
57265	for wall niches	27	119550		0,450	1 PCE / 12 PCE




PROTEKTOR BEAM LEVELLING BRACKET PROFILE

MORE SPACE FOR ROOF INSULATION



THE SOLUTION PROVIDER FOR OLD AND NEW CONSTRUCTIONS

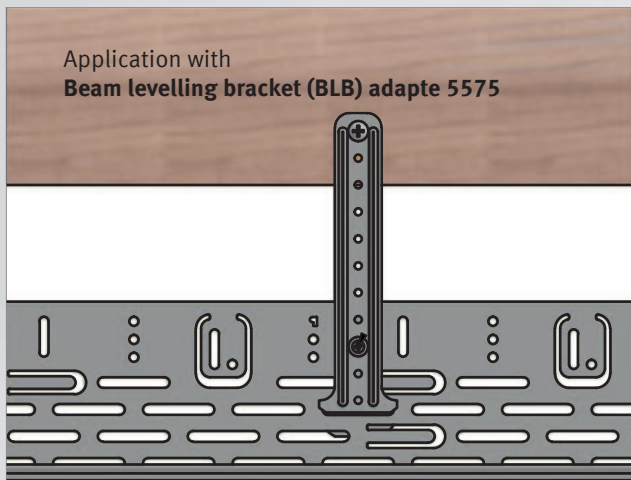

Product video
View now »



Saving energy is an important factor when redeveloping, updating and renovating. More and more old buildings are being fitted with increased insulation and new internal floors and walls under sloping roofs.


Those carrying out the work repeatedly face the same problems. Inadequate rafter height that does not support the required thickness of insulation and means that under rafter insulation is needed. Uneven wooden beams or rafters make the installation of close-fitting planking on sloping roofs and wooden rafters a veritable jigsaw puzzle. The solution for these applications is the new rafter levelling angle profile from PROTEKTOR.

- Awarded the “Product innovation building in our heritage” at BAU 2007
- Precise adjustment of the profile using slot-shaped holes and pre-stamped right-angle brackets
- Under rafter insulation secured against slipping
- Simple job to fit the damp-proof membrane

Beam levelling bracket (BLB) adapte 5575

The BLB adapter, combined with profiles, provides up to 165 mm available height on top of the rafter/beam height. This allows significantly

DRY LINING

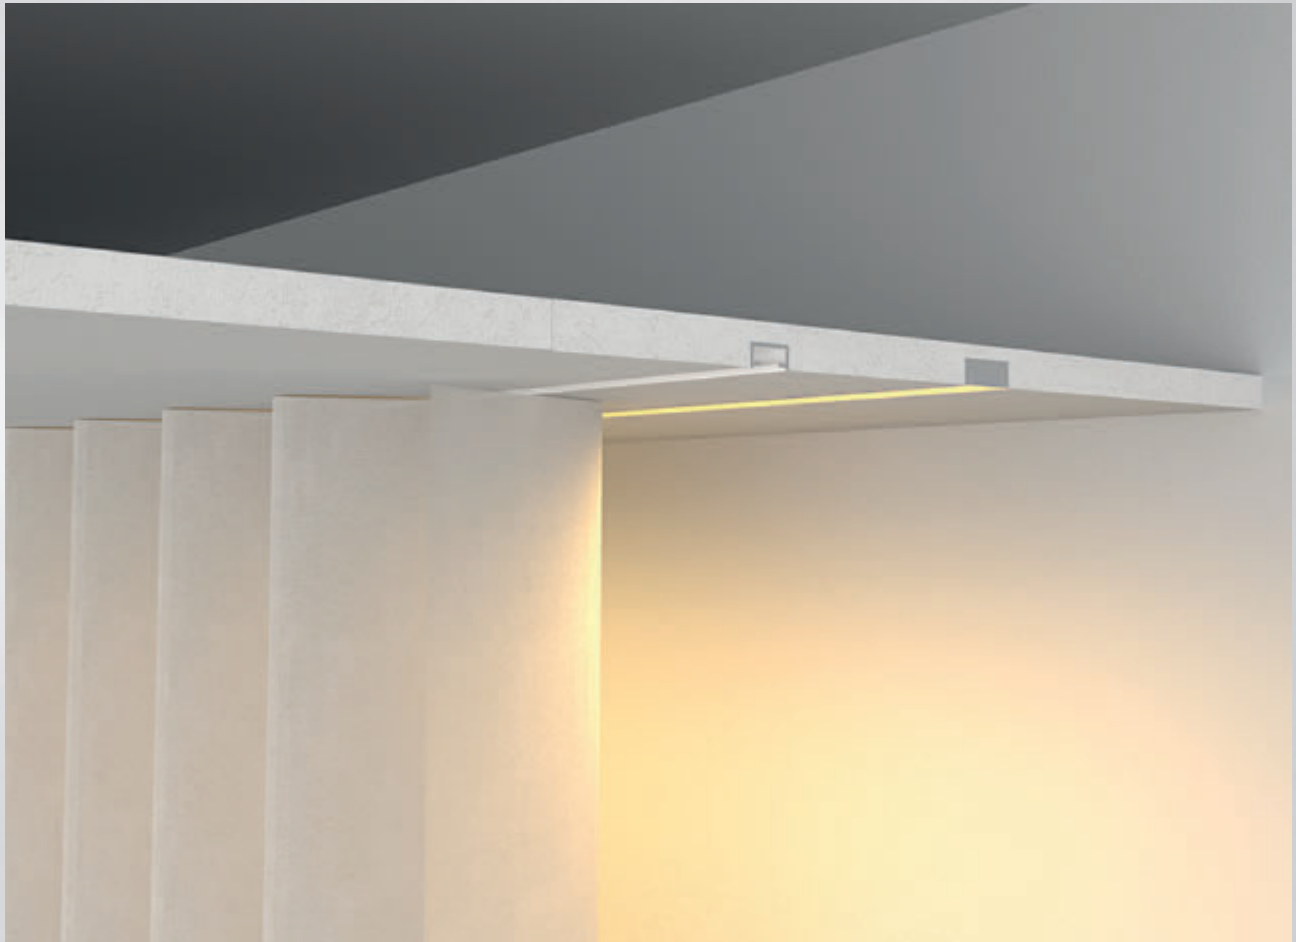

DESIGN ELEMENTS: PRECISELY PREFABRICATED FOR PERFECT RESULTS

Preformed parts play a decisive role in the realisation of high-quality construction projects by providing a tailor-made solution for functional applications. They are an essential element in modern drywall construction and offer an efficient solution for many applications, particularly in the design of ceilings and walls. They enable quick installation and contribute to considerable time savings.

Advantages:


- ▶ Perfect design and high quality
- ▶ Simple assembly
- ▶ Time-saving realisation
- ▶ Attractive and precise results

PREFORMED PARTS
PRODUCT CLASS 6100

Curtain system GRP 12.5 mm single track

Plasterboard with integrated white VS57 curtain profile, single track.
 Protective cover included.
 Edge distance: 70 / 100 mm

Material: Plasterboard with aluminium
Notes:
 Max. Load per curtain rail 7 kg / m
 Please order stopper set 57238 and connector 57237 separately.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57230	12,5 mm	200	119547		5,000	10 PCE / 4 BUN

Corner piece for single track curtain system

Corner piece, simple-track, for plasterboard with integrated white VS57 curtain profile.
 Protective cover included.

Material: Plasterboard with aluminium
Notes:
 Max. Load per curtain rail 7 kg / m




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57235	GFK 12,5 mm	119554		3,200	1 PCE / 10 BUN

Curtain system 12.5 mm double track

Plasterboard with integrated white VS57 curtain profile, double track.
 Protective cover included.
 Edge distance: 70 / 70 / 100 mm

Material: Plasterboard with aluminium
Notes:
 Max. Load per curtain rail 7 kg / m
 Please order stopper set 57238 and connector 57237 separately.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57234	GKF 12,5	200	119548		6,500	10 PCE / 5 BUN

Corner piece for double track curtain system

Corner piece, double-track, for plasterboard with integrated white VS57 curtain profile.
 Protective cover included.

Material: Plasterboard with aluminium
Notes:
 Max. Load per curtain rail 7 kg / m



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57236	GKF 12,5 mm	119555		3,500	1 PCE / 10 BUN

Interconnects

For longitudinal connection of the GKF 12.5 mm curtain system, single and double track

Material: Spring steel, galvanized



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57237	for curtain rail	4	119945		0,002	10 PCE / 1 BAG

PREFORMED PARTS
PRODUCT CLASS 6100

Stopper set

Stopper set for curtain rails consisting of 10 stoppers and a drilling template

Material: PE



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57238	for curtain rails	120116		0,009	1 PCE / 1.000 BAG

3-layer bonded gypsum blocks, 12,5 mm

For use in wall areas with sliding ceiling connections and where increased sound insulation is required.

Material: Plasterboard
Norm: EN 14190:2014



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 57100	50 mm	200	119343		2,550	8 PCE / 30 BOX
NEW 57101	75 mm	200	119344		3,825	8 PCE / 20 BOX
NEW 57102	100 mm	200	119345		5,100	6 PCE / 20 BOX



QUALITY IS ALWAYS A GOOD FIT


Whether you are connecting, fixing, tensioning, adjusting or hanging – PROTEKTOR accessories are always a smart solution. The perfect compatibility of the components with each other makes work easier and ensures high-quality results.

STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Quick cross-connector

For creating cross connections of CD profiles on hanging ceiling sub-constructions.

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6102	for C 60-27	108534		0,040	100 PCE / 45 BOX

Flat quick cross-connector

For creating cross connections of CD profiles on hanging ceiling sub-constructions.

Material: Galvanised steel
Material thickness (mm): 0,8 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6105	for C 60-27	103182		0,054	100 PCE / 270 BOX

Flat quick cross-connector

For creating cross connections from UA-50 to CD 60-27 profiles on hanging ceiling sub-constructions.

Material: Galvanised steel
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6100	for U50 to C 60-27	101259		0,042	100 PCE / 250 BOX

Angle anchor

For creating cross connections of CD profiles on hanging ceiling sub-constructions. Always to be fitted in pairs and pressed together using pliers.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,25 kN/Pair




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6090	for C 60-27	114751		0,020	100 PCE / 120 BOX

C-ceiling profile connector

For connecting CD 60-27 profiles lengthwise.

Material: Galvanised steel
Material thickness (mm): 0,5 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6078	for C 60-27	8	107904		0,038	100 PCE / 45 BOX

STANDARD ACCESSOIRES
PRODUCT CLASS 6500

C-ceiling profile connector

For connecting CD 60-27 profiles lengthwise.

Material: Galvanised steel
Material thickness (mm): 0,6 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6079	for C 60-27	8	110789		0,030	100 PCE / 45 BOX

Angle connector flat

For longitudinal axial connection of CD 60/27 profiles in angles of 45° to 180°

Material: Galvanised steel
Material thickness (mm): 0,5 mm




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6077	for C 60-27	119032		0,072	100 PCE / 24 BOX

CD safety cross connector

For connecting CD profiles on ceiling sub-structures.

Material: Galvanised steel
Material thickness (mm): 0,8 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN/Paar




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6116	for C 60-27	107925		0,055	100 PCE / 45 BOX

U-hanger flat, for C 60-27

For mounting CD profiles on ceiling sub-structures

Material: Galvanised steel
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6169	65 mm	110127	65	0,033	100 PCE / 280 BOX
6167	125 mm	110126	125	0,058	100 PCE / 136 BOX
6159	200 mm	106313	200	0,080	100 PCE / 66 BOX




U-hanger flat for wood frame

For attaching frame wood on hanging ceiling sub-structures.

Material: Galvanised steel
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6166	125 mm	114050	50	0,057	100 PCE / 136 BOX




STANDARD ACCESSOIRES
PRODUCT CLASS 6500

U-hanger bent for CD 60-27

For attaching CD profiles on hanging ceiling sub-structures.

Material: Galvanised steel
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6161	65 mm	111371	60	0,032	100 PCE / 45 BOX
6157	125 mm	107906	60	0,058	100 PCE / 45 BOX

Quick install clip

For directly attaching CD profiles on hanging ceiling sub-constructions.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6092	for CD 60-27	111373		0,031	100 PCE / 120 BOX

Fixing clip

For directly attaching ceiling profiles to wooden substructures

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,15 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6128	for CD 60-27	118344		0,030	100 PCE / 102 BOX

Direct hanging rail runner for direct mounting

For attaching CD profiles on hanging ceiling sub-structures.

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,15 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6096	for CD 60-28	112380		0,031	100 PCE / 45 BOX

Adjustable direct hanging for C 60-27

For attaching CD profiles on hanging ceiling sub-structures. 2-pieces, includes safety clamps. Use washers for wooden beam screw joints.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6111	40 - 70 mm	111475		0,130	50 PCE / 66 BOX
6110	59 - 108 mm	107924		0,140	100 PCE / 16 BOX


STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Hanger for ceiling profile 60-27

For attaching CD profiles on hanging ceiling sub-constructions, especially onto wooden beams.

Material: Galvanised steel
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,25 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6117	170 mm	106028		0,038	100 PCE / 144 BOX
6118	270 mm	106029		0,060	100 PCE / 84 BOX




Anchor hanger with tension spring

For attaching CD profiles on ceiling sub-constructions with wire support.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,25 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6034	for C 60-27	101129		0,043	100 PCE / 80 BOX




CD hanger

For mounting CD profiles on ceiling sub-constructions with wire support. Quick assembly facilitated by lateral wire insertion.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6038	for C 60-27	107902		0,059	100 PCE / 45 BOX




Tension spring with suspension wire

For mounting ceiling sub-constructions.

Material: Steel wire, galvanized / Spring steel
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,25 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6009	100mm	101045		0,018	100 PCE / 60 BOX
6008	200 mm	101028		0,033	100 PCE / 96 BOX




Quick install hanger hook/eye

For mounting ceiling sub-constructions.

Material: Steel wire, galvanized / Spring steel
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,15 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6300	100 - 300 mm	111355		0,048	100 PCE / 30 BOX
6301	300 - 600 mm	111356		0,077	100 PCE / 24 BOX
6302	600 - 1000 mm	111357		0,114	100 PCE / 20 BOX



STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Double spring with special spring

For extending hooks/eyelet wires on ceiling sub-constructions. Quick assembly facilitated by lateral wire insertion.

Material: Spring steel, galvanized
Material thickness (mm): 0,75 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6004		115797		0,022	100 PCE / 120 BOX

Suspension wire with hook

Application area: ceiling sub-constructions connected to suspension hangers.

Material: Steel wire, galvanised
Material thickness (mm): 4 mm
Norm: EN 13964:2014
Norm: DIN18168-1



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6051	125 mm	101160		0,014	100 PCE / 200 BOX
6052	250 mm	101162		0,027	100 PCE / 200 BOX
6053	375 mm	101165		0,039	100 PCE / 150 BOX
6054	500 mm	101166		0,050	100 PCE / 100 BUN
6055	750 mm	101167		0,074	100 PCE / 50 BUN
6056	1000 mm	101168		0,097	100 PCE / 50 BUN

Suspension wire with eye

Application area: ceiling sub-constructions connected to suspension hangers.
Eyelet Ø 6 mm

Material: Steel wire, galvanised
Material thickness (mm): 4 mm
Norm: DIN18168-1
Norm: EN 13964:2014



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6041	125 mm	101137		0,014	100 PCE / 200 BOX
6042	250 mm	101144		0,027	100 PCE / 200 BOX
6043	375 mm	101145		0,039	100 PCE / 150 BOX
6044	500 mm	101147		0,051	100 PCE / 100 BUN
6045	750 mm	101148		0,074	100 PCE / 50 BUN
6046	1000 mm	101151		0,097	100 PCE / 50 BUN
6048	1250 mm	101155		0,118	100 PCE / 50 BUN
6050	1500 mm	101157		0,148	100 PCE / 50 BUN
6040	2000 mm	107871		0,194	100 PCE / 50 BUN
6062	2500 mm	111346		0,244	100 PCE / 50 BOX
6063	3000 mm	111347		0,294	100 PCE / 50 BOX


STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Adjusting strip for Nonius hanger

For mounting ceiling sub-constructions connected with vernier subdividers.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6020	working length 85 mm	101099		0,020	100 PCE / 100 BOX
6021	working length 135 mm	101101		0,035	100 PCE / 100 BOX
6022	working length 235 mm	101104		0,056	100 PCE / 84 BOX
6023	working length 340 mm	101106		0,075	100 PCE / 56 BOX
6024	working length 440 mm	101110		0,090	100 PCE / 40 BOX
6025	working length 540 mm	101111		0,105	100 PCE / 40 BOX
6026	working length 640 mm	101112		0,126	100 PCE / 32 BOX
6027	working length 740 mm	101114		0,150	100 PCE / 32 BOX
6028	working length 840 mm	101116		0,165	100 PCE / 24 BOX
6029	working length 940 mm	101117		0,175	100 PCE / 24 BOX




Adjusting strip for Nonius hanger

For mounting ceiling sub-constructions connected with vernier subdividers.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
DIN test standard: DIN 18168-2

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
60211	working length 1040 mm	111348		0,195	50 PCE / 40 BUN
60212	working length 1140 mm	110165		0,212	50 PCE / 40 BUN
60213	working length 1240 mm	111350		0,227	50 PCE / 40 BUN
60214	working length 1340 mm	110166		0,243	50 PCE / 40 BUN
60215	working length 1440 mm	111351		0,260	50 PCE / 40 BUN
60216	working length 1540 mm	110167		0,277	50 PCE / 32 BUN
6019	working length 1640 mm	101096		0,310	50 PCE / 32 BUN
60218	working length 1740 mm	111352		0,327	50 PCE / 32 BUN
60219	working length 1840 mm	111353		0,335	50 PCE / 32 BUN
60220	working length 1940 mm	110162		0,345	50 PCE / 32 BUN
60225	working length 2440 mm	110163		0,429	50 PCE / 24 BOX
60230	working length 2940 mm	110164		0,513	50 PCE / 20 BOX




Nonius bar

For mounting onto ceiling sub-constructions to extend vernier suspensions.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6031		300	109824		0,174	20 PCE / 15 BUN




STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Nonius connector

For mounting onto ceiling sub-constructs to extend vernier suspensions.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6032		111883		0,020	100 PCE / 132 BOX

Fixing clip

Application area: ceiling substructures to create a connection between vernier shells and subdividers.
Please apply 2 pieces per connection.

Material: Steel wire, galvanised
Material thickness (mm): 2,5 mm
Norm: EN 13964:2014
Norm: DIN18168-2




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6199	for Nonius hanger	101525		0,006	100 PCE / 600 BOX

Safety pin

Application area: ceiling substructures to create a connection between vernier shells and subdividers.
Bend around fixing clip after installing.

Material: Steel wire, galvanised
Norm: EN 13964:2014
Norm: DIN18168-2




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6201	for Nonius hanger	101532		0,005	100 PCE / 300 BOX

Nonius hanger perforated

Application area: ceiling sub-constructs with vernier suspensions.

Material: Galvanised steel
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6015	for hanging wood	19	101081		0,039	100 PCE / 100 BOX

Nonius hanger angled

Application area: ceiling sub-constructs with vernier suspensions.

Material: Galvanised steel
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6017	for wood hanging	17	101090		0,050	100 PCE / 45 BOX


STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Nonius hanger

For attaching CD profiles on ceiling sub-construct-
tions with vernier suspensions.

Material: Galvanised steel
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6012	for C 60-27	12	101054	28,5	0,037	100 PCE / 102 BOX




Nonius hanger

For attaching CD profiles on ceiling sub-construct-
tions with vernier suspensions.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6018	for C 60-27	13	107918		0,054	100 PCE / 45 BOX



Nonius Hanger diagonal pull

For fastening ceiling profiles for substructures,
dome and vault constructions. Variably adjustable
for inclined suspensions.
Lateral fastening possible due to rotary function.

Material: Galvanised steel
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5547	for C 60-27	17	117398		0,065	100 PCE / 32 BOX




Nonius hanger

For attaching CD profiles on ceiling sub-construct-
tions with vernier suspensions, including fixing
clip.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6014	für CD 60-27	101077		0,045	100 PCE / 32 BOX




Nonius hanger

For attaching UA profiles on ceiling sub-construct-
tions with vernier suspensions, including fixing
clip.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6013	for U-50-20	101070		0,045	100 PCE / 32 BOX




STANDARD ACCESSOIRES
PRODUCT CLASS 6500

Connecting bracket

For attaching UA profiles to floors and ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6185	for U 50	111884	40	0,070	100 PCE / 60 BOX




Connecting bracket

For attaching UA profiles to floors and ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Load carrying class: k.A.

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6183	for U 75 / U 100	110041	68	0,115	25 PCE / 252 BUN
6182	for U 100/U 125	110040	93	0,234	25 PCE / 168 BUN
6190	for U 125 / U 150	112401	118	0,234	25 PCE / 168 BUN




Push fit bracket set for door post

For attaching UA/CW profiles to floors and ceilings. Includes:
4 x push-fit brackets
8 x pegs
8 x PVC guide rails for CW profiles

Material: Galvanised steel
Material thickness (mm): 2 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6751	for U/C 50	103740	47	0,740	1 PCE / 500 BOX
6752	for U/C 75	103741	73	1,080	1 PCE / 500 BOX
6753	for U/C 100	103742	97	1,440	1 PCE / 500 BOX




Push fit bracket for door post

For attaching UA profiles to floor and ceiling.

Material: Galvanised steel

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6754	for U 50	114741	47	0,185	50 PCE / 20 BOX
6755	for U 75	114742	73	0,270	25 PCE / 20 BOX
6756	for U 100	114743	97	0,360	25 PCE / 20 BOX




Adjustable pivot bracket

For attaching CD profiles on wall facing.

Material: Galvanised steel
Material thickness (mm): 0,8 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6156	30 mm	101419	60	0,034	100 PCE / 55 BOX
6158	60 mm	106389	60	0,043	100 PCE / 65 BOX




STANDARD ACCESSOIRES
PRODUCT CLASS 6500

flange clip

For attaching CD-60-27 profiles. Not suitable for mounting ceiling constructions.
For flange thickness ≥ 7 to ≤ 28 mm.

Material: Galvanised steel
Material thickness (mm): 0,6 mm




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6141	for C 60-27	103372		0,024	100 PCE / 45 BOX

Hanger

For attaching T rails on ceiling sub-constructions with wire support. Quick installation with special spring for lateral wire entries.

Material: Galvanised steel
Material thickness (mm): 1,5 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,15 kN



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6162	for T-main profile	108001		0,034	100 PCE / 72 BOX



SPECIAL PROFILES FOR CREATIVE DRYWALL CONSTRUCTION

Ceilings and walls are the most important design elements to shape the character of a room. Round and well-designed dry-wall constructions are in trend for shaping light and design installations. For special structures, radii, curves and connections, Protektor flexibilo offers a unique range of different special profiles.

With the concave or convex bendable ceiling profiles of the Protektor flexibilo series and the corresponding connection profiles, a wide variety of arch types, meandering ceilings, domes and freely designed shapes can be formed. The profiles can be bent directly on the construction site in all directions and in a dimensionally stable manner using simple means.

The flexibilo wall profiles are also individually formable and can be turned into round, elliptical and architecturally freely designed drywalls in just a few steps.

 **flexibilo**
DIE FORMBAREN

FORMABLE PROFILES FLEXIBILO
PRODUCT CLASS 6590


Concavely bendable C ceiling profile

Application area: for curved ceiling constructions.
Profiles must be bent on site.

Minimum bending radius 110 mm.
The specifications of the manufacturer of the
boards must be observed

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: EN 13964

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5550	C ceiling profile 60-27	300	117004	60	0,570	8 PCS / 24 BUN




C Ceiling profile for concave and convex curves

Application area: for curved ceiling constructions.
Profiles must be bent on site.

Minimum bending radius 110 mm.
The specifications of the manufacturer of the
boards must be observed

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: EN 13964

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5549	C Ceiling profile 60-27	300	119500	60	0,533	8 PCS / 24 BUN




GR-connection profile pre-slotted

Application area: connection profile for vaulted
ceilings as well as horizontal convex and concave
connections to walls/columns.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5241	U 28.5-27	300	108511	28,5	0,380	8 PCS / 24 BUN




U connection profile bendable

Application area: for curved ceiling constructions.
Profiles must be bent on site.

Minimum bending radius 110 mm.
The specifications of the manufacturer of the
boards must be observed.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: EN 13964

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5552	UD 28	300	116996	29	0,380	8 PCS / 25 BUN




U track profile bendable

Application area: for curved wall constructions.
Profiles must be bent on site.

Minimum bending radius 200 mm.
The specifications of the manufacturer of the
boards must be observed.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: EN 13964

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5553	UW 50-06	300	117000	50	0,580	8 PCS / 25 BUN
5555	UW 75-06	300	117002	75	0,690	8 PCS / 20 BUN
5556	UW 100-06	300	117003	100	0,806	8 PCS / 15 BUN




FORMABLE PROFILES FLEXIBILO
PRODUCT CLASS 6590

RS/U-track pre-slotted


Application area: connection profile for round walls and angled connections.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5272	U 50-06	300	107822	50	0,530	8 PCS / 20 BUN
5273	U 75-06	300	107823	75	0,630	8 PCS / 15 BUN
5274	U 100-06	300	107824	100	0,740	8 PCS / 10 BUN



PROTEKTOR RS/U-TRACK PRE-SLOTTED ONE PROFILE FOR TWO APPLICATION AREAS

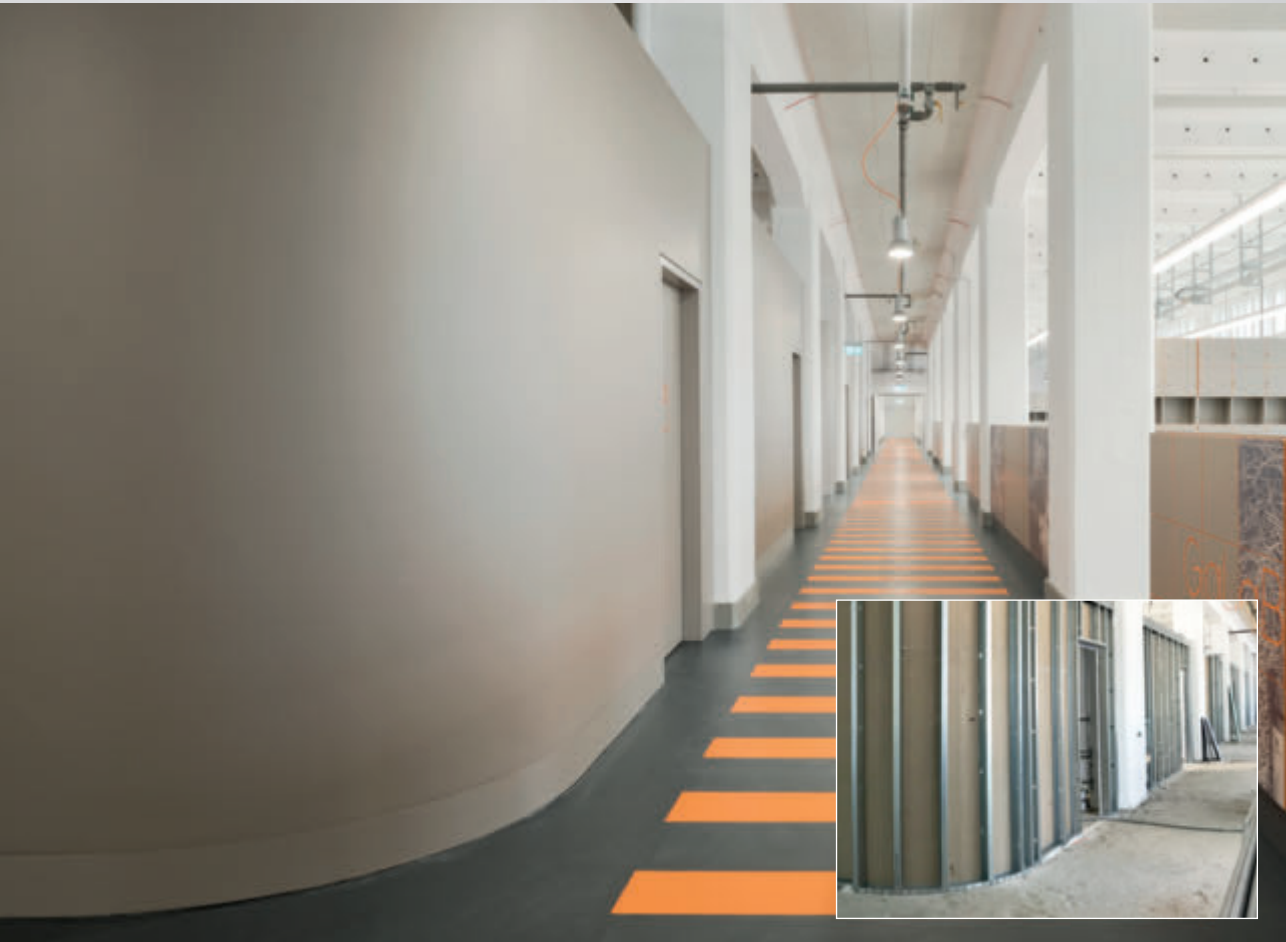

PROTEKTOR RS/U-TRACK PRE-SLOTTED – INNOVATIVE, PATENTED, DOES MORE



Time is money
With Protektor you do not waste your time either searching for the right product or fitting it. Our RS Profile can be used for a large variety of jobs in new and re-developments. It covers a number of different construction needs. The intelligent arrangement of prestamped shapes and perforations allows useful combinations and rapid fitting.

Hugely flexible
Special wall U-profile with a unique structure allowing two types of use:

- Rounded walls
- For slanted connections of partition walls and shaft walls

Amazing combinations
Cleverly designed perforations and pre-stamping allow sensible combination options. Makes work on new constructions, renovations, and reconstruction noticeably simpler.

Well thought-out designs

- A single product for multiple construction demands
- Easy to handle
- More flexibility
- Time saving
- Less storage space

PROTEKTOR RS-PROFIL – EIN PROFIL FÜR ZWEI ANWENDUNGSBEREICHE

Das innovative Protektor RS-Profil aus unserem Fullbündel lässt mehr. Dank seiner einzigartigen Struktur ist das spezielle U-Profil sowohl in einer Standardkonstruktion einsetzbar, als auch bei besonderen Konstruktionen als auch bei Anschlüssen von Montagegeräten oder Vorrichtungen an Schlangen.

Ausgangspunkt für Schlangen

Spezialanwendung für Sonderbau

PROTEKTOR RS-PROFIL – EIN HILFSREICHES PROBLEMLÖSER

Die besonderen Leistungen und Stützungen des Protektor RS-Profiles lassen sinnvolle Kombinationen möglich und damit wirtschaftliche Lösungen im Neubau sowie in der Renovierung, Sanierung, z. B.:

- nur ein Produkt für mehrere bauliche Anforderungen
- einfache Handhabung
- Flexibilität und Zeitersparnis
- weniger Lagerfläche

PROTEKTOR RS-PROFIL – EIN PROFIL IN MARKTRECHTEN ABMESSUNGEN

Profil	Art. Nr.	Stärke	Material	Standardlänge	Standardbreite	Standardhöhe	Standardgewicht
PROTEKTOR RS-PROFIL	1000000	1000	Alu	2,50 m	100 mm	100 mm	1,5 kg
PROTEKTOR RS-PROFIL	1000001	1000	Alu	2,50 m	100 mm	100 mm	1,5 kg
PROTEKTOR RS-PROFIL	1000002	1000	Alu	2,50 m	100 mm	100 mm	1,5 kg


Product video
View now »



DRY LINING



INSTRUCTIONS FOR APPLICATION

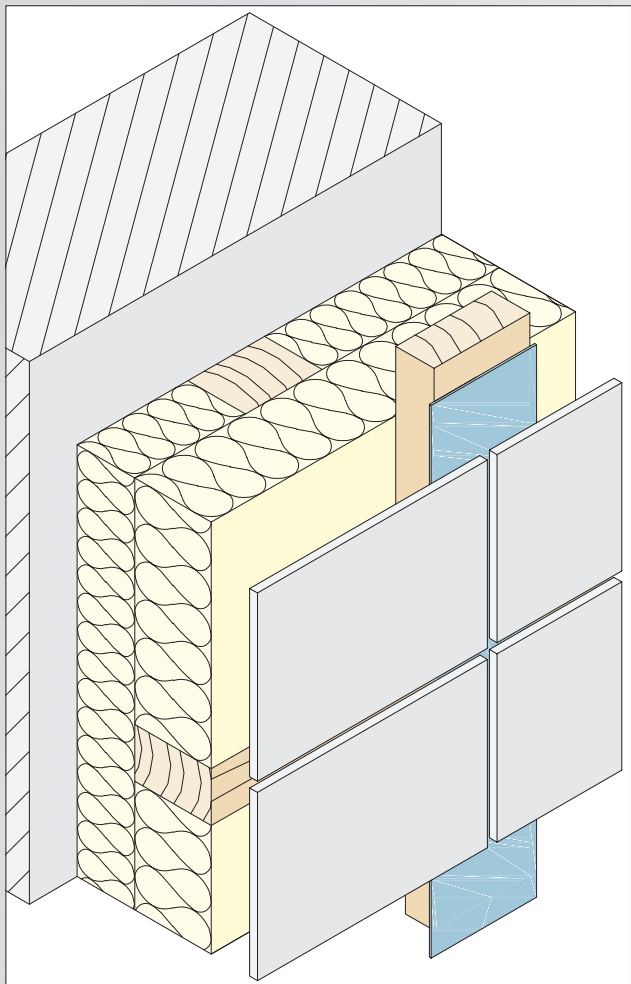

The joint tapes can be used for vertical joints and have different functions.

Joint tapes decouple the facade cladding and reduce noise transmission. They furthermore reduce water penetration and protect the substructure as well as the insulation from penetrating water.

For wooden substructures, the joint tape must overlap at least 5 mm on each side of the substructure.

PROTEKTOR joint tapes are made from aging- resistant and weather-resistant EPDM or soft PVC. The EPDM joint tapes significantly exceed the requirements of DIN 18516 Part 1 regarding temperature fluctuations and temperature limitations. Installation of the substructure is facilitated by the EPDM joint tapes with an adhesive foil, which is applied on site. Note: The adhesive foil increases the material thickness by approx. 0.2 mm.

PROTEKTOR recommends using joint tapes on wooden and aluminium substructures.

JOINT TAPES
PRODUCT CLASS 6650

Partition wall tape one-sided self-adhesive

Application area: connection sealing strips, self-gluing one side for ceiling constructions.
Building material class B2.

Material: Polyethylene
Material thickness (mm): 3 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6197	30 mm	3,000	101522	30	0,008	30 ROL / 12 BOX
6194	45 mm	3,000	101511	45	0,011	20 ROL / 12 BOX
6195	70 mm	3,000	101516	70	0,016	12 ROL / 12 BOX
6196	95 mm	3,000	101520	95	0,020	10 ROL / 12 BOX



Mixed fibre fleece one-sided self-adhesive

Application area: connection sealing strips for self-gluing one side of dividing walls.
Building material class B3.

Material: Mixed fibre fleece
Material thickness (mm): 3 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6187	50 x 3 mm	2,000	101506	50	0,022	6 ROL / 72 BOX
6188	70 x 3 mm	2,000	100125	70	0,035	4 ROL / 72 BOX
6189	95 x 3 mm	2,000	101509	95	0,045	3 ROL / 72 BOX



Joint tape with fold groove

With central groove and double perforations.
Ideally suited for as a reinforcing strip for covering joints on gypsum and gypsum fibreboards.

Material: paper
Norm: EN 13963:2005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
53110	50 mm	2,300	112163	50	0,040	20 ROL / 66 BOX
53111	50 mm	7,500	112165	50	0,500	20 ROL / 45 BOX



Edge protection aluzink

Perforated paper with metal strips;
Ideally suited for reinforcing the corners of walls, roof extensions and ceilings when executing drywall construction.
Variable in use for acute to obtuse-angled edges.

Material: Paper with metal strips
Norm: EN 14353

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
53000	50 mm	3,000	112170	50,0	1,320	10 ROL / 42 BOX



Trennfix separation strips

With single-sided self-adhesive strips for separating construction elements and preventing the formation of tears along construction element connections.

Material: paper

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
53400	65 mm	5,000	114231	65	0,350	24 ROL / 30 BOX





PRECISION CONNECTS

Here you will find everything you need for stable connections. Our precision and high quality fixing elements make for rapid and precise work. The product range includes self-drilling screws and dowels to provide secure attachments.


FIXING ACCESSORIES

PRODUCT CLASS 6600

Mounting set

For jointing connection angles with UA profiles and back-to-back screws on wide span supports.
Includes: Flathead screw with special 2mm-square neck
DIN 603/4.6 with U washers and nuts,
M8 x 20 mm.
Quality 4.6

Material: Galvanised steel



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6203	M8 x 20 SW 13	101533		0,021	100 PCE / 384 BOX


Mounting set

For connecting light steel components.
Includes: Hexagon head screws with combination nut.
M8 x 30 mm
Quality 8.8
Quality 8.8

Material: Galvanised steel

Norm: DIN EN ISO 4017

DIN test standard: DIN EN ISO 4032



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6202	M8 x 30 SW 13	114437		0,042	100 PCE / 350 BOX


Dry wall screw with bit

Universal drywall screw FN with flat head, double thread and nail point. For hangers and profiles on wood/wood materials and thin-walled steel profiles.
incl. bit per box

Material: Steel, phosphated

Norm: EN 14566

Norm: DIN18182-2



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6228	FN 4,2 x 35 mm	119453		1,900	500 PCE / 288 BOX
6229	FN 4,2 x 65 mm	119349		3,200	500 PCE / 96 BOX


Dry wall screw FN with flat head

Drywall screw FN with flat head for suspension on wooden components

Material: Steel, phosphated

Norm: EN 14566

Norm: DIN18182-2




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6242	FN 4.2 x 35 mm	112447		0,611	200 PCE / 600 BOX

Ceiling dowel

Steel dowels for connecting drywall construction systems in concrete.

Material: Galvanised steel

European Technical Approval: ETA-14/0390




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6260	6 x 40 mm	110628		0,015	100 PCE / 300 BOX

FIXING ACCESSORIES
PRODUCT CLASS 6600

Impact dowel

For installing UW profiles with a drilling diameter of 6 mm.
Max. mounting thickness of 12 mm.
Not suitable for suspended ceilings!

Material: Galvanised steel



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6248	6 x 40 mm	101666		0,004	100 PCE / 450 BOX

Sheet metal screw

Sheet metal screw with cross-head and screw tip for sheet metal thicknesses of up to 0.7 mm, with outside head diameter of 11 mm.

Material: Galvanised steel
Norm: EN 14566



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6239	4,2 x 13 mm	112445		1,800	1.000 PCE / 384 BOX


Sheet metal screw with flat head

Sheet metal screw with cross-head and self-drilling tip for sheet metal thicknesses between 0.7 and 2.25 mm, with outside head diameter of 11 mm.

Material: Galvanised steel
Norm: EN 14566



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6236	4,2 x 13 mm	112438		1,800	1.000 PCE / 384 BOX
6237	4,2 x 19 mm	112443		2,500	1.000 PCE / 388 BOX

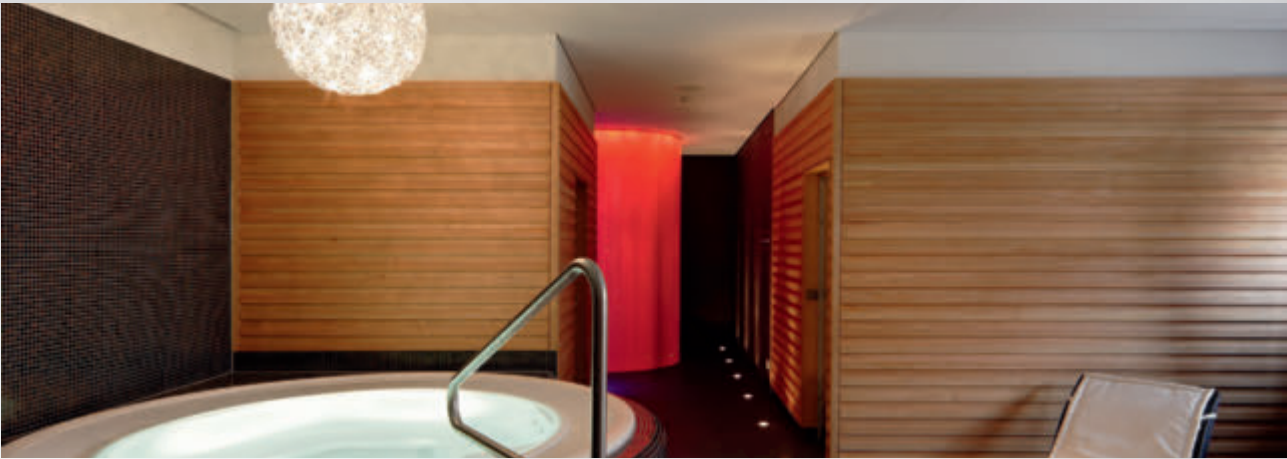

OVERVIEW OF CORROSION PROTECTION STANDARDS

Providing highly resistant protection against corrosion will guarantee that metal substructures for drywall remain durable for a long period of time. All PROTEKTOR metal substructures are protected against corrosion in line with the industry norms and provided complete protection under normal climatic conditions. When faced with higher demands, such as in exterior areas or swimming halls, additional coating is needed. Protektor offers profile systems to meet these needs, including accessories conform to EN ISO 12944.

In order to ensure the necessary degree of safety, additional corrosion protection coating is applied at the factory, in line with EN 13964. The quality of the special coatings has been tested and confirmed.




Corrosivity categor and corrosion stress in accordance with EN ISO 12944-2	Examples for environments in line with EN ISO 12944-2 and EN ISO 9223		Suitable system by Protektor with protection duration	Tests	Coating
	outside	inside			
C3 moderate	Urban and industrial atmosphere with moderate level of air contaminants, coastal areas with low level of salt content.	Production areas with high level of moisture and some air contaminants, e.g. dairy plants, breweries, laundries, food production facilities.	Profiles: C3 - very high C4 - high C5 - medium Accessories and UA profiles: C3 - very high to C5 - high	Condensate test 720 h for all profiles and accessory components. Salt spray test 720 h for profiles. Additional salt spray test C5M 1,440 h for all accessory components and UA profiles.	CD/UD/CW and UW are coil coated. UA profiles and accessory components are powder coated.
C4 strong	Industrial areas, coastal areas with moderate levels of salt content.	Rooms subject to frequent condensation and high levels of air contaminants caused by production processes, e.g. industrial facilities and swimming halls. Damp rooms, e.g. shower areas, chemical facilities, boat houses located over sea water.	Profiles: C4 - high C5 - medium Accessories and UA profiles: C3 - very high to C5 - high	Condensate test 720 h for all profiles and accessory components. Salt spray test 720 h for profiles. Additional salt spray test C5M 1,440 h for all accessory components and UA profiles.	CD/UD/CW and UW are coil coated. UA profiles and accessory components are powder coated.
C5 very strong	Coastal and off-shore areas with high levels of salt content. When sealed corners are indicated in the tender specifications.	Buildings and areas subject to nearly constant condensation and with high levels of contaminants, e.g. saltwater baths and thermal baths. When sealed corners are indicated in the tender specifications.	Profiles: C5 - high Accessories and UA profiles: C3 - very high to C5- high	Condensate test 720 h and salt spray test C5M 1,440 h for all accessory components and profiles.	UA profiles and accessory components are powder coated.
Please observe the respective tender specifications when choosing a suitable system.					

ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

Ceiling profile round return C3 very high|C4 high|C5 middle

Application area: hanging ceilings and wall facings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
DIN test standard: DIN 18168-2
Notes:
Similar to RAL 9005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58102	C 60-27	400	112237	60	0,575	12 PCS / 15 BUN

U-connection profile C3 very high|C4 high|C5 middle

Application area: connection profile for hanging ceilings and wall facings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 9005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58122	UD 28-27	300	109447	28,5	0,370	16 PCS / 28 BUN

U-connection profile C3 very high|C4 high|C5 middle

Application area: connection profile for hanging ceilings and wall facings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 9005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58168	U 28-45/27	300	110274	28	0,471	16 PCS / 20 BUN

Hat ceiling profile C3 very high|C4 high|C5 middle

Application area: ceilings and wall facings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 9005



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59014	48-15.5	400	108912	48	0,473	10 PCS / 20 BUN

ANTI CORROSION DEFENDO
PRODUCT CLASS 6570


C-stud C3 very high|C4 high|C5 middle

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings with increased corrosion resistance requirements.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request

Similar to RAL 9005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59011	C 50-06	300	110069	48,8	0,706	8 PCS / 16 BUN
	C 50-06	350	110502	48,8	0,706	8 PCS / 16 BUN
	C 50-06	400	110070	48,8	0,690	8 PCS / 16 BUN
	C 50-06	450	110503	48,8	0,706	8 PCS / 16 BUN




C-stud C3 very high|C4 high|C5 middle

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings with increased corrosion resistance requirements.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 9005

Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59015	C 75-06	300	110071	73,8	0,830	8 PCS / 12 BUN
	C 75-06	350	110504	73,8	0,820	8 PCS / 12 BUN
	C 75-06	400	110073	73,8	0,830	8 PCS / 12 BUN
	C 75-06	450	110505	73,8	0,820	8 PCS / 12 BUN
	C 75-06	500	118082	73,8	0,820	8 PCS / 12 BUN




C-stud C3 very high|C4 high|C5 middle

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings with increased corrosion resistance requirements.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request
Similar to RAL 9005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59016	C 100-06	260	115736	98,8	0,950	8 PCS / 8 BUN
	C 100-06	300	110074	98,8	0,950	8 PCS / 8 BUN
	C 100-06	350	110506	98,8	0,929	8 PCS / 8 BUN
	C 100-06	400	110076	98,8	0,950	8 PCS / 8 BUN
	C 100-06	450	110507	98,8	0,929	8 PCS / 8 BUN
	C 100-06	500	115982	98,8	0,929	8 PCS / 8 BUN




DRY LINING

ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

C-stud C3 very high|C4 high|C5 middle

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings with increased corrosion resistance requirements.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request
Similar to RAL 9005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59041	C 125-06	400	110436	123,8	1,067	8 PCS / 8 BUN

C-stud C3 very high|C4 high|C5 middle

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings with increased corrosion resistance requirements.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Fixed lengths on request
Similar to RAL 9005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59024	C 150-06	400	110651	148,8	1,161	4 PCS / 12 BUN

U-track C3 very high|C4 high|C5 middle

Application area: supporting bracket for walls/wall faces or for free-spanning ceilings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 9005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59030	U 50-06	400	108079	50	0,580	8 PCS / 20 BUN
59033	U 75-06	400	108080	75	0,690	8 PCS / 15 BUN
59034	U 100-06	400	108081	100	0,806	8 PCS / 10 BUN
59048	U 125- 06	400	110430	125	0,917	4 PCS / 15 BUN
59047	U 150-06	400	108122	150	0,980	4 PCS / 15 BUN

Ceiling profile round return C4 very high|C5 high

Application area: hanging ceilings and wall facings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Norm: EN 13964
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58130	C 60-27	400	110068	60	0,575	12 PCS / 15 BUN

ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

U-connection profile C4 very high|C5 high

Application area: connection profile for hanging ceilings and wall facings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58148	U 28-27	300	109485	28,5	0,370	16 PCS / 28 BUN

C-stud MAXI C4 very high|C5 high

Application area: stand profile for walls/wall faces or support profile for free-spanning ceilings with increased corrosion resistance requirements.
H cut-out at each end, continuously every 250 mm and subsequently every 500 mm.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59211	C 50-06	300	110083	48,8	0,706	8 PCS / 16 BUN
	C 50-06	400	110084	48,8	0,706	8 PCS / 16 BUN
59215	C 75-06	300	110085	73,8	0,820	8 PCS / 12 BUN
	C 75-06	400	110086	73,8	0,820	8 PCS / 12 BUN
59216	C 100-06	300	110087	98,8	0,929	8 PCS / 8 BUN
	C 100-06	400	110088	98,8	0,929	8 PCS / 8 BUN

U-Wall profile UW C4 very high|C5 high

Application area: supporting bracket for walls/wall faces or for free-spanning ceilings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59230	U 50	400	109688	50	0,580	8 PCS / 20 BUN
59233	U 75	400	109689	75	0,690	8 PCS / 15 BUN
59234	U 100	400	109690	100	0,806	8 PCS / 10 BUN

U-reinforcing profile UA C3-C5 universal

Application area: walls/wall faces, especially in door areas, or support profiles for free-spanning ceilings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59019	U 50-20	300	110077	48.8	1,770	6 PCS / 15 BUN
	U 50-20	350	110508	48.8	1,770	6 PCS / 15 BUN
	U 50-20	400	110078	48.8	1,770	6 PCS / 15 BUN
	U 50-20	450	110509	48.8	1,770	6 PCS / 15 BUN
	U 50-20	500	114734	48.8	1,770	6 PCS / 15 BUN

ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

U-reinforcing profile UA C3-C5 universal

Application area: walls/wall faces, especially in door areas, or support profiles for free-spanning ceilings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 2 mm
Norm: EN 14195:2005
Norm: DIN18182-1
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59020	U 75-20	300	110079	73.8	1,990	4 PCS / 25 BUN
	U 75-20	350	110510	73.8	1,990	4 PCS / 25 BUN
	U 75-20	400	110080	73.8	1,990	4 PCS / 25 BUN
	U 75-20	450	110511	73.8	1,990	4 PCS / 25 BUN
	U 75-20	500	114735	73.8	1,990	4 PCS / 25 BUN
59021	U 100-20	300	109679	98.8	2,485	4 PCS / 15 BUN
	U 100-20	350	110512	98.8	2,485	4 PCS / 15 BUN
	U 100-20	400	109680	98.8	2,485	4 PCS / 15 BUN
	U 100-20	450	110513	98.8	2,485	4 PCS / 15 BUN
	U 100-20	500	114736	98.8	2,485	4 PCS / 15 BUN
59022	U 125-20	400	110428	123.8	3,065	2 PCS / 30 BUN
59023	U 150-20	400	115813	148.8	3,678	2 PCS / 24 BUN
	U 150-20	600	115814	148.8	3,678	2 PCS / 24 BUN

CD quick cross brace C3-C5 high

For creating cross connections for CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,8 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes:
Similar to RAL 7016




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58104	for C 60-27	109449		0,040	100 PCE / 45 BOX

CD-quick cross brace flat C3-C5 high

For creating cross connections from UA-50 to CD 60-27 profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes:
Similar to RAL 7016




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58304	for U 50 to C 60-27	110179		0,042	100 PCE / 45 BOX

C-ceiling profile connector C3-C5 high

For laterally connecting CD 60-27 profiles with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,5 mm
Norm: EN 13964:2014
Notes:
Similar to RAL 7016



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58103	for C 60-27	8	109448		0,043	100 PCE / 45 BOX


ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

U-hanger flat C3-C5 high

For attaching CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.

Material: Galvanised steel, with C3-C5-surface coating
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58159	200 mm	115165		0,080	100 PCE / 66 BOX




U-hanger C3-C5 pre-bent high

For attaching CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58121	125 mm	109467		0,058	100 PCE / 45 BOX




Nonius hanger C3-C5 high

For attaching CD profiles on ceiling sub-constructions with vernier suspensions increased corrosion resistance.

Material: Galvanised steel with coating
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes:
Similar to RAL 7016

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58108	for C 60-27	12	109452		0,048	100 PCE / 51 BOX




Adjustable direct hanging for CD 60-27 C3-C5 high

For attaching CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.
Suspension height up to CD profile sub-construction 59-108 mm.
2-pieces, includes safety clamps. Use washers for wooden beam screw joints.

Material: Galvanised steel with coating
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes: Bi
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58310	59 - 108 mm	112300		0,130	100 PCE / 16 BOX




Click-Fix Track mounting C3-C5 high

For directly attaching CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58128	for C 60-27	110704		0,028	100 PCE / 102 BOX




ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

Nonius hanger for UA 50 C3-C5 high

For attaching UA profiles on ceiling sub-constructions with vernier suspensions, without safety bars, with increased corrosion resistance.

Material: Galvanised steel with coating
Material thickness (mm): 1 mm
Norm: EN 13964:2014
DIN test standard: DIN 18168-2
Load carrying class: 0,40
Notes:
Similar to RAL 7016




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58129	without safety clip	110705		0,053	100 PCE / 32 BOX

Fixing clip C3-C5 high

Application area: ceiling sub-constructions as a connection between vernier shells and subdividers, with increased corrosion resistance requirements.
Please apply 2 pieces per connection.

Material: Steel wire, galvanised with coating
Material thickness (mm): 2,5 mm
Norm: EN 13964:2014
Notes:
Similar to RAL 7016




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58107	for Nonius	119474		0,006	100 PCE / 600 BOX

Nonius hanger C3-C5 perforated high

Application area: ceiling sub-constructions with vernier suspensions, with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Notes:
Similar to RAL 7016




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58106	for wood hanging	19	110652		0,050	100 PCE / 45 BOX

Nonius hanger 90° angle C3-C5 high

Application area: ceiling sub-constructions with vernier suspensions, with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Notes:
Similar to RAL 7016



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58317	for wood hanging	116151		0,050	100 PCE / 45 BOX


ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

Adjusting strip for Nonius hanger C3-C5 high

Application area: ceiling sub-constructs
connected to vernier subdividers with increased
corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58109	working length 85 mm	109450		0,025	100 PCE / 100 BOX
58110	working length 135 mm	109453		0,035	100 PCE / 100 BOX
58111	working length 235 mm	109455		0,056	100 PCE / 84 BOX
58112	working length 340 mm	109456		0,075	100 PCE / 56 BOX
58113	working length 440 mm	109457		0,090	100 PCE / 40 BOX
58114	working length 540 mm	109458		0,105	100 PCE / 40 BOX
58115	working length 640 mm	109459		0,126	100 PCE / 32 BOX
58116	working length 740 mm	109461		0,150	100 PCE / 32 BOX
58117	working length 840 mm	109460		0,165	100 PCE / 24 BOX
58118	working length 940 mm	109462		0,175	100 PCE / 24 BOX




Adjusting strip for Nonius hanger C3-C5 high

Application area: ceiling sub-constructs
connected to vernier subdividers with increased
corrosion resistance requirements.

Material: Galvanised steel with coating
Norm: EN 13964:2014
Norm: DIN18168-2
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58123	working length 1140 mm	110168		0,212	50 PCE / 40 BOX
58124	working length 1340 mm	110169		0,243	50 PCE / 40 BOX
58119	working length 1640 mm	109463		0,310	50 PCE / 32 BOX
58125	working length 1940 mm	110170		0,345	50 PCE / 32 BOX
58126	working length 2440 mm	110171		0,429	50 PCE / 24 BOX




Safety cross connector C3-C5 high

For connecting CD profiles on level sub-constructs
with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 0,8 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN/Paar
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58105	for C 60-27	110042		0,055	100 PCE / 45 BOX




Angle-fixing bracket for UA-profile C3-C5 high

For attaching UA profiles to floors and ceilings with
increased
corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 2 mm
Notes:
Similar to RAL 7016

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59185	for UA 50	8	109835	40	0,098	25 PCE / 160 BOX




ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

Angle-fixing bracket for UA-profile C3-C5 high

For attaching UA profiles to floors and ceilings with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Material thickness (mm): 2 mm
Norm: {"classificationCheckNormEn": "12944"}
Notes:
Similar to RAL 7016

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59183	for UA 75 / UA 100	8	109834	68	0,169	25 PCE / 252 BUN
59182	for UA 100 / UA 125	8	109833	93	0,234	25 PCE / 168 BUN




Dry wall screw with trumpet head universal

For connecting panelling materials for sheet metal thicknesses of up to 0.7 mm with double lead thread with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Norm: EN 14566
Norm: DIN18182-2

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58205	TN 3,5 x 25 mm	112467		1,000	1000 PCE / 384 BOX
58206	TN 3,5 x 35 mm	112468		2,000	1000 PCE / 288 BOX




Dry wall screw C3-C5 with trumpet head universal

For connecting panelling materials for sheet metal thicknesses of 0.7 to 2.25 mm with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Norm: EN 14566
Norm: DIN18182-2
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58215	TB 3,5 x 25 mm	112469		1,000	1000 PCE / 384 BOX
58216	TB 3,5 x 35 mm	112470		2,000	1000 PCE / 288 BOX




Fibreboard screw TB C3-C5 with wedge head and Phillips slot

For attaching fibreboards with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Norm: EN 14566
Notes:
Similar to RAL 7016

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58241	3,9 x 30 mm	0	112471		1,000	1000 PCE / 288 BOX




Sheet metal screw C3-C5 with flat head and Phillips slot uni

For connecting metal sheets of 0.7 to 2.25 mm in thickness with increased corrosion resistance requirements. Head diameter 11 mm.

Material: Galvanised steel with coating
Norm: EN 14566
Notes:
Similar to RAL 7016

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58236	4.2 x 13 mm	112472		1,500	1000 PCE / 384 BOX




ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

Self-tapping screw with oval head C3-C5 universal

For connecting metal sheets of 0.7 to 2.25 mm in thickness with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Notes: Similar to RAL 7016




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58227	3,8 x 11,1 mm	118345		1,000	1.000 PCE / 384 BOX

Sheet metal screw C3-C5 with flat head and Phillips slot uni

For connecting metal sheets of up to 0.7 mm in thickness with increased corrosion resistance requirements.

Material: Galvanised steel with coating
Norm: EN 14566
Norm: DIN18168-2
Notes: Similar to RAL 7016




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58239	4.2 x 13 mm	112473		1,000	1.000 PCE / 384 BOX

Mounting set M 8 x 20 / spanner size 13 C3-C5 universal

For connecting UA profiles with connection angles. Comprised of flat-head screws with special DIN 603/4.6 square necks, with washer and nut.

Material: Galvanised steel with coating
Notes: black



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58203	for door frames	109829		0,021	100 PCE / 350 BOX

Touch-up paint universal

For treating interfaces and minor scratches on site. Spray can: Contents 0.4 l
Please ensure thick application, approx. 200 µm



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58150		27	109712		0,450	12 PCE / 84 BOX

Ceiling dowel with nail C3

Application area: Exterior areas and wet areas not subject to aggressive conditions.

Material: Stainless steel A4

European Technical Approval: ETA-09-0313



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58220	6 x 45 mm	4	111945		0,010	100 PCE / 880 BOX

ANTI CORROSION DEFENDO
PRODUCT CLASS 6570

Ceiling dowel with nail head C4-C5

Application area: chlorinated atmospheres, atmospheres with extreme levels of chemical pollution, swimming halls, brine baths.

Material: Stainless steel 1.4529

European Technical Approval: ETA-09-0313



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
58221	6 x 45 mm	4	111946		0,010	100 PCE / 880 BOX


SOUND INSULATION – PROFILES AND ACCESSORIES

PRODUCT CLASS 6530



EXPERIENCE THE DIFFERENCE

Special construction elements for ceilings and walls prevent sound passing through them e.g. under a wooden beam ceiling, for wooden frame buildings and when renovating old buildings. New constructions can also gain more peace and quiet from this technically smart solution, improving the quality of life. Built-in relaxation.




Product video
View now »

SOUND INSULATION SILENCIO
PRODUCT CLASS 6530

TPS C-ceiling profile

Application area: ceiling profile impact sound protection systems underneath wooden beam ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5104	C 55-18,5	400	100101	55	0,495	12 PCS / 40 BUN

TPS-U-wall connection profile

Application area: connection profile for TPS profiles on impact sound protection systems underneath wooden beam ceilings.

Material: Galvanised steel
Material thickness (mm): 0,56 mm
Norm: EN 14195:2005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5313	for Item no. 5104	300	114096		0,250	12 PCS / 20 BUN

TPS-CD-connector

For creating a lengthwise connection of TPS profiles for impact sound insulation underneath wooden beam ceilings.

Material: Galvanised steel
Material thickness (mm): 0,6 mm




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6127	for 5104	101337		0,048	100 PCE / 80 BOX

TPS-spring clip FN 4,2 x 35 mm adjustable with screws

For attaching TPS profiles for impact sound insulation underneath wooden beam ceilings. Includes 200 wooden screws, FN 4.2 x 35 mm (art. no. 6242)
Max. load $f \approx 0.08$ kN (8 kg) per spring clip

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: {"classificationCheckNormEn":"EN 13964"}
DIN test standard: DIN 18168-2




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6126	for 5104	109714		0,058	100 PCE / 45 BOX

RC-profile

Application area: walls/wall facings.
Horizontal installation.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5100	for facing shell	300	103576		0,380	10 PCS / 50 BUN

SOUND INSULATION SILENCIO
PRODUCT CLASS 6530

Hat spring rail

Application area: underneath wooden ceiling beams for improving sound insulation.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5007	60-27-06	400	117203		0,791	10 PCS / 54 BUN

U-hanger acoustically insulated for CD 60-27

For attaching CD profiles on hanging ceiling sub-constructions for improving sound insulation.

Material: Galvanised steel
Material thickness (mm): 0,9 mm
Norm: EN 13964
Norm: {"classificationCheckNormEn": "EN 13964"}
DIN test standard: DIN 18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6160	125 mm	107907	60	0,072	100 PCE / 45 BOX

U-hanger flat acoustically insulated

For attaching CD profiles on hanging ceiling sub-constructions for improving sound insulation.

Material: Galvanised steel
Material thickness (mm): 0,9 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
56369	70 mm	109842	70	0,058	100 PCE / 50 BOX
56367	125 mm	109844	125	0,072	100 PCE / 50 BOX
56359	200 mm	109843	200	0,094	100 PCE / 20 BOX

Click-Fix Track mounting acoustically insulated

For attaching CD profiles on hanging ceiling sub-constructions for improving sound insulation.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
56393	for C 60-27	112115		0,042	100 PCE / 80 BOX

Adjustable direct hanging acoustically insulated for C 60-27

For attaching CD profiles on hanging ceiling sub-structures to improve sound insulation. 2-pieces, includes safety clamps. Use washers for wooden beam screw joints.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Load carrying class: 0,40 kN



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
56311	50 - 80 mm	115612		0,100	50 PCE / 48 BOX
56310	69 - 118 mm	115611		0,115	50 PCE / 32 BOX


SOUND INSULATION SILENCIO
PRODUCT CLASS 6530

Adjusting strip for Nonius hanger acoustically insulated

Application area: ceiling sub-constructions connected to vernier subdividers for improving wall facings.

Material: Galvanised steel
Material thickness (mm): 1 mm
Norm: EN 13964:2014
Norm: DIN18168-2

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
56321	190 mm	109846		0,049	100 PCE / 80 BOX
56322	290 mm	109847		0,070	100 PCE / 50 BOX
56323	390 mm	109848		0,089	100 PCE / 24 BOX
56324	490 mm	109849		0,104	100 PCE / 15 BOX
56325	590 mm	109850		0,119	100 PCE / 12 BOX
56326	690 mm	109851		0,140	100 PCE / 15 BOX




Wire with eye acoustically insulated

Application area: ceiling sub-constructions connected to suspension hangers for improving wall facings.

Material: Steel wire, galvanised
Material thickness (mm): 4 mm
Norm: EN 13964:2014


Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
56342	250 mm	25	109853		0,041	100 PCE / 50 BOX
56344	500 mm	50	109854		0,065	100 PCE / 16 BOX



Acoustic insulated element

For attaching accessories with Ø 12-mm perforations. 3-piece acoustic insulation element (upper, lower parts and washer).

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
56300		109841		0,014	100 PCE / 80 BOX





Spring clamp

For attaching wooden slats to improve sound insulation.
maximum load $f \leq 0,10$ kN

Material: Galvanised steel
Material thickness (mm): 0,7 mm
Norm: EN 13964:2014

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6129	for spring hanging	101342		0,018	250 PCE / 36 BOX



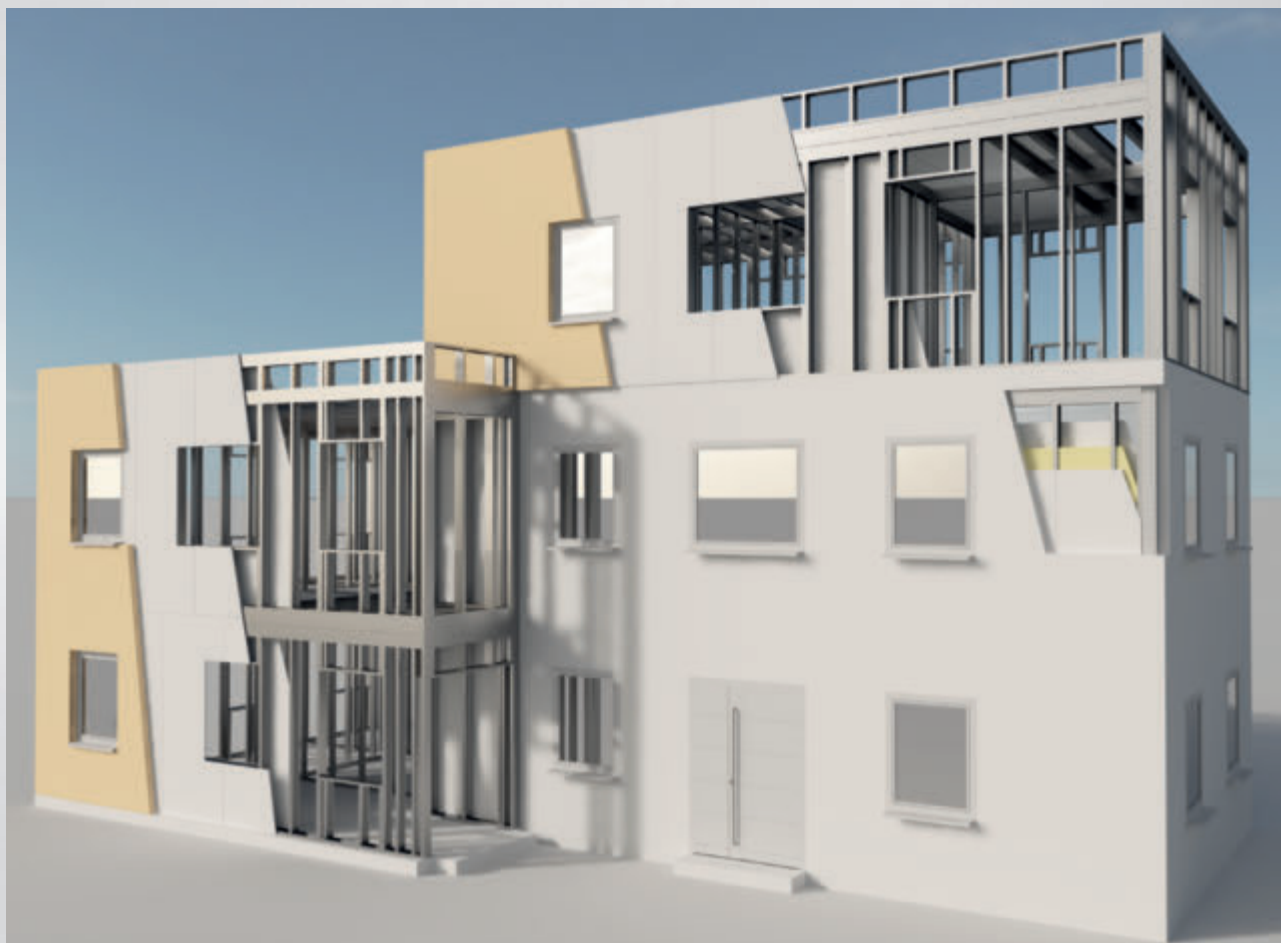

EDIFICIO – THE PROFESSIONAL LIGHTGAUGE STEEL CONSTRUCTION SYSTEM DEVELOPED BY PROTEKTOR

Many tasks are easier to complete with edificio, the lightweight steel construction system made by Protektor. Extensions, refurbishments, new buildings, façades are just some of the projects that can be executed quickly and accurately with this construction method.

Cold formed C and U profiles form the basis for edificio light-gauge steel structures. The procedure for installation is accepted by dry wall experts and is seamlessly integrated into existing routine workflows.

You can find further details in our special brochures.



Product video

View now »




LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO
PRODUCT CLASS 6550

C-wide span beam profiles

Application area: wide span supports for free-spanning or hanging ceilings.

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5127	Typ C102	400	100408	102,5	2,500	1 PCS / 96 PCS
	Typ C102	600	100420	102,5	2,500	1 PCS / 96 PCS




U-beam/wall profile

Application area: wall profile for walls or wide span supports for free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 1,5 mm
Norm: EN 1090-1

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4705	50-50-15	300	117187		1,680	6 PCS / 15 BUN




C-beam/wall profile

Application area: wall profile for walls or wide span supports for free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 1,5 mm
Norm: EN 1090-1
Notes:
Fixed length on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4710	97-50-15	400	118838	97	2,355	1 PCS / 84 BUN
	97-50-15	500	118839	97	2,355	1 PCS / 84 BUN
	97-50-15	600	118840	97	2,355	1 PCS / 84 BUN
	97-50-15	700	118841	97	2,355	1 PCS / 84 BUN
4715	147-50-15	400	118842	147	2,935	1 PCS / 72 BUN
	147-50-15	500	118843	147	2,935	1 PCS / 72 BUN
	147-50-15	600	118844	147	2,935	1 PCS / 72 BUN




C-beam/wall profile

Application area: wall profile for walls or wide span supports for free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 2 mm
Norm: EN 1090-1
Notes:
Fixed length on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4810	97-50-20	400	118845	97	3,150	1 PCS / 84 BUN
	97-50-20	500	118846	97	3,150	1 PCS / 84 BUN
	97-50-20	600	118847	97	3,150	1 PCS / 84 BUN
4815	147-50-20	400	118848	147	3,940	1 PCS / 72 BUN
	147-50-20	500	118849	147	3,940	1 PCS / 72 BUN
	147-50-20	600	118850	147	3,940	1 PCS / 72 BUN




LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO
PRODUCT CLASS 6550

U-beam profile

Application area: wide span supports on free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 1,5 mm
Norm: EN 1090-1
Notes:
Fixed length on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4419	197-40-15	400	118851	197	3,370	1 PCS / 60 BUN
	197-40-15	500	118852	197	3,370	1 PCS / 60 BUN
	197-40-15	600	118853	197	3,370	1 PCS / 60 BUN




U-beam profile

Application area: wide span supports on free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 2 mm
Norm: EN 1090-1
Notes:
Fixed lengths on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4519	197-40-20	400	118854	197	4,480	1 PCS / 60 BUN
	197-40-20	500	118855	197	4,480	1 PCS / 60 BUN
	197-40-20	600	118856	197	4,480	1 PCS / 60 BUN




U-beam profile

Application area: wide span supports on free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 2 mm
Norm: EN 1090-1
Notes:
No stock items, only order-related fixed lengths.
Lengths > 800 cm on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4525	247-40-20	400	115808	247	5,085	1 PCS / 50 PCS
4529	297-40-20	400	115809	297	5,865	1 PCS / 50 PCS




U-beam profile

Application area: wide span supports on free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 3 mm
Norm: EN 1090-1
Notes:
No stock items, only order-related fixed lengths.
Lengths > 800 cm on request

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4914	147-40-30	400	115810	147	5,238	1 PCS / 50 PCS
4918	197-40-30	400	106591	197	6,408	1 PCS / 50 PCS
4923	247-40-30	400	115811	247	7,578	1 PCS / 50 PCS
4929	297-40-30	400	115812	297	8,748	1 PCS / 50 PCS




LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO
PRODUCT CLASS 6550

U-connection profile

Application area: supporting bracket for wide span supports on free-spanning or free-hanging ceilings.

Material: S320 GD+Z
Material thickness (mm): 2 mm
Norm: EN 14195:2005




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5138	for Item no. 5127	400	100585	108	3,500	1 PCS / 200 PCS

U-connection profile

Application area: connection profile for walls or free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 1,5 mm
Norm: EN 1090-1




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4410	100-40-15	500	118857	100	2,050	1 PCS / 96 BUN
4415	150-40-15	500	118858	150	2,650	1 PCS / 72 BUN
4420	200-40-15	500	118859	200	3,230	1 PCS / 60 BUN

U-connection profile

Application area: connection profile for walls or free-spanning ceilings.

Material: S320 GD + ZM
Norm: EN 1090-1
Material thickness (mm): 2 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4510	101-40-20	500	118860	101	2,050	1 PCS / 96 BUN
4515	151-40-20	500	118861	151	2,650	1 PCS / 72 BUN
4520	201-40-20	500	114241	201	3,230	1 PCS / 60 PCS
	201-40-20	500	118862	201	3,230	1 PCS / 60 BUN

U-connection profile

Application area: connection profile for free-spanning ceilings.

Material: S320 GD + ZM
Material thickness (mm): 2 mm
Notes:
No stock items, only customised production.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4427	251-40-20	400	106577	251	5,138	1 PCS / 50 PCS
4530	301-40-20	400	106528	301	5,928	1 PCS / 50 PCS

ediWall U-connection profile

Application area: connection profile for walls.

Material: S320 GD + ZM
Material thickness (mm): 2 mm
Norm: EN 1090-1



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4477	151-70-20	500	118081	151	4,460	1 PCS / 40 PCS

LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO


PRODUCT CLASS 6550

U-ring tie profile

Application area: upper connection profile on load-bearing walls.

Material: S320 GD + ZM
Material thickness (mm): 1,5 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4610	100-175-15	500	114916	100	5,265	1 PCS / 50 PCS
4615	150-175-15	500	115551	150	5,850	1 PCS / 50 PCS




U-ring tie profile angled

Application area: upper connection profile on load-bearing walls.

Material: S320 GD + ZM
Notes:
Inclination must be specified when ordering, max. 20 °.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4611	100-175-15	500	114017	100	5,265	1 PCS / 50 BUN
4616	150-175-15	500	114018	150	5,850	1 PCS / 50 BUN




Supporting bracket

Application area: supporting bracket for wide span supports on free-hanging ceilings.

Material: S320 GD + ZM
Material thickness (mm): 3 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5503	70-50-30	400	111844	50	2,340	1 PCS / 125 PCS




Supporting bracket

Application area: supporting bracket for wide span supports on free-hanging ceilings.

Material: S320 GD + ZM
Material thickness (mm): 4 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5502	70-50-40	400	111843	50	3,120	1 PCS / 100 PCS




profile as tilting protection

Safety against tilting in the upper part of wide span beams.
e≤1500 mm

Material: Galvanised steel
Material thickness (mm): 2 mm
Norm: EN 14195:2005
DIN test standard: DIN 18168-2

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
5198	30 x 30 mm	400	114440	30	0,887	8 PCS / 25 BUN



LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO


PRODUCT CLASS 6550

Installation level profile

For creating an installation level (42.5 mm) in the wall area. Installation is horizontal.

Material: Galvanised steel
Material thickness (mm): 0,6 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4364	42,5 mm	300	115078		0,801	10 PCS / 200 BUN




Wall fixing angle

For attaching wide span supports to the wall or for creating replacements.

Material: Galvanised steel
Material thickness (mm): 3 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6172	for C 102	107361	97	0,397	1 PCE / 25 PCE




Wall fixing angle

For mounting wide span supports with threaded rods.

Material: Galvanised steel
Material thickness (mm): 10 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6184	158 x 90 x 45 mm	101498		0,720	1 PCE / 25 PCE




Support-reinforcements

For tilt protection in the support area of wide span supports.

Material: S320 GD+Z
Material thickness (mm): 4 mm

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4540	TA 100-40	106579	90	0,362	1 PCE / 25 PCE
4541	TA 150-40	106580	123	0,407	1 PCE / 25 PCE
4542	TA 200-40	106581	148	0,587	1 PCE / 25 PCE
4543	TA 250-40	106582	173	0,587	1 PCE / 25 PCE
4544	TA 300-40	106583	202	0,684	1 PCE / 25 PCE




Connection angle

For attaching wide span supports to the wall or for creating replacements.

Material: S320 GD+Z
Material thickness (mm): 2 mm

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4550	AW 90-20 50x50	9	115107	90	0,079	25 PCE / 252 BUN
4551	AW 140-20 50x50	14	115108	140	0,119	25 PCE / 252 BUN




LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO

PRODUCT CLASS 6550

Connection angle perforated on both sides

For attaching wide span supports to the wall or for creating replacements.

Material: S320 GD+Z
Material thickness (mm): 2 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4554	AW 90-20 60x40	9	115428	90	0,079	25 PCE / 252 BUN
4558	AW 140-20 60x40	14	115429	140	0,119	25 PCE / 252 BUN

Connection angle

For attaching wide span supports to the wall or for creating replacements.

Material: S320 GD + ZM
Material thickness (mm): 4 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4552	AW 90-40 50x50	9	106586	90	0,351	1 PCE / 25 PCE
4553	AW 140-40 50x50	14	106587	140	0,546	1 PCE / 25 PCE

Connecting bracket

Connection bracket for fastening C-stud profiles to wall openings in non-load-bearing exterior walls.

Material: S320 GD + ZM
Material thickness (mm): 2 mm
Load carrying class: k.A.




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4548	L 100 x 80 x 2mm	116690	80	0,226	25 PCE / 40 BUN

ediWall Holding clip

Retaining clamp for fixing the C-stud profiles with sliding ceiling connection for non-load-bearing external walls

Material: Galvanised steel
Material thickness (mm): 1 mm




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4597	150	116688	147	0,104	25 PCE / 40 BOX

Adapter

For mounting wide span supports with threaded rods.

Material: S320 GD+Z
Material thickness (mm): 4 mm




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6186		9	106079		0,300	1 PCE / 25 PCE

LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO
PRODUCT CLASS 6550

Galvanised threaded rod set M10 8.8

For suspending wide-span beam structures with threaded rod. **Material:** Galvanised steel


Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6558	2000 mm	200	115467		10,100	1 SET / 50 BOX



Suspension clamp

For mounting threaded bars, Ø 10mm, onto IP beams with a max. flange thickness of 24 mm. Lower section with joint. **Material:** Galvanised steel


Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6586	flange 2-24 mm	102067		0,275	1 PCE / 50 PCE



Suspension clamp

For mounting threaded bars, Ø 10mm, onto IP beams with a max. flange thickness of 20 mm. **Material:** Galvanised steel


Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6587	flange 2-20 mm	102068		0,220	1 PCE / 50 PCE



Ground plate

For distributing loads when mounting wide span supports with threaded rods. **Material:** Galvanised steel
Material thickness (mm): 5 mm


Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6589	10,5 mm	6	102073		0,071	25 PCE / 110 BOX



Beam clamp set

For securing wide span supports onto steel beams with flange thicknesses of up to 25 mm. **Material:** Galvanised steel

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6588	M10x50 for C102	102070		0,170	10 PCE / 240 BOX
6590		105745		0,169	10 PCE / 240 BOX




LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO
PRODUCT CLASS 6550

Suspension clamp

For securing vernier shells to steel beams.
Vertical installation.

Material: Spring steel, galvanized




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6580	for 2-3 mm	102057		0,014	100 PCE / 50 BOX
6585	flange 8-14 mm	108289		0,014	100 PCE / 50 BOX

Suspension clamp

For securing vernier shells to steel beams.
Vertical installation.

Material: Spring steel, galvanized




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6582		103111		0,009	100 PCE / 40 BOX

Super TEKS screw

For use with a sheet metal thickness of up to 6.0 mm.

Material: Galvanised steel

European Technical Approval: ETA-10/0182



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6234	6.3 x 19 mm SW 8	118480		2,650	500 PCE / 250 BOX


Connecting screw SL4

Self-drilling screw for connecting edificio light-weight steel profiles.
 $\Sigma_{\max} t_1+t_2$: 4.0 mm

Material: Galvanised steel

Notes:

Bit art. no. 6490 required for processing




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4591	4,8 x 16 mm	116327		1,490	1.000 PCE / 260 BOX
NEW 4592	4,8 x 16 mm	120205		0,672	250 PCE / 520 BOX

Bit for connecting screw SL4

Bit for processing the connecting screw SL4 art. no. 4591 or 4592

Material: Galvanised steel



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6490	square 6x6 mm	116322		0,019	1 PCE / 25 PCE

LIGHTWEIGHT STEEL CONSTRUCTION EDIFICIO
PRODUCT CLASS 6550

Thread forming screw

for connecting steel components to each other.
Σmax. t1 + t2: 13.0 mm
Pre-drilling of the steel components necessary.
European Technical Approval: ETA-11/0191

Material: Galvanised steel



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4593	hexagon head 16 mm TDBLF-T-10,6x23	16	118943		0,025	100 PCE / 275 BOX

Impact screw insert with magnet

Insert for impact screw for the use of the screw
Art.-No. 4593

Material: Galvanised steel




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6491	for art. no. 4593	119037		0,335	1 PCE / 40 PCE

profile as tilting protection

Safety against tilting in the upper part of wide
span beams with increased corrosion protection

Material: Galvanised steel with coating
Norm: EN 14195:2005
DIN test standard: DIN 18168-2




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
59198	30 x 30 mm	400	114625		0,887	8 PCS / 25 BUN

Nonius hanger C3-C5

For attaching CD profiles on ceiling sub-construc-
tions with vernier suspensions increased corrosion
resistance.
For external ceilings with suspension heights of
500 - 1000 mm

Material: Galvanised steel with coating
Material thickness (mm): 1,2 mm
Norm: EN 13964:2014
Norm: DIN18168-2
Coating norm: DIN EN ISO 12944
Load carrying class: 0,25



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
4599	for exterior ceilings	12	118390		0,048	100 PCE / 51 BOX



PASSAGIO TELESCOPIC SUPPORT

When conventional c-stud profiles and reinforced profiles reach their limits, the supports of Protektor form the right basis to safely absorb high static forces. The height-adjustable supports are easy to assemble without welding and are ideally suited for the installation of heavy doors, fire doors, radiators and heavy-duty equipment.



Load table of the telescopic supports		Door leaf width b = 1.01 m		Door leaf width b = 1.26 m	
		Max. Deflection 2 mm	Max. Deflection 4 mm	Max. Deflection 2 mm	Max. Deflection 4 mm
Wall height	Profile cross-section	Maximum door leaf weight			
2,50 m	QH 50x50x4	460 kg	570 kg	300 kg	450 kg
	RH 75x50x4	600 kg	600 kg	600 kg	600 kg
	RH 100x50x4	600 kg	600 kg	600 kg	600 kg
2,75 m	QH 50x50x4	185 kg	370 kg	120 kg	240 kg
	RH 75x50x4	510 kg	600 kg	320 kg	600 kg
	RH 100x50x4	600 kg	600 kg	600 kg	600 kg
3,00 m	QH 50x50x4	105 kg	215 kg	70 kg	140 kg
	RH 75x50x4	290 kg	590 kg	190 kg	385 kg
	RH 100x50x4	600 kg	600 kg	395 kg	600 kg
3,50 m	QH 50x50x4	55 kg	110 kg	35 kg	70 kg
	RH 75x50x4	150 kg	300 kg	95 kg	195 kg
	RH 100x50x4	310 kg	600 kg	200 kg	400 kg
4,00 m	QH 50x50x4	35 kg	70 kg	20 kg	45 kg
	RH 75x50x4	95 kg	190 kg	60 kg	125 kg
	RH 100x50x4	200 kg	400 kg	125 kg	255 kg

Door height < 2.10 m / wind set load 0.285 kN/m² / dead weight of wall 0.50 kN/m² / installation area 2 / horizontal line load 1.00 kN/m
Distance to next profile ≤ 0.15 m / height of floor structure: 0.00 m / distance to bottom hinge: 0.424 m / distance between hinges: 1.435 m
Fasteners: according to static requirements and manufacturer's specifications

SUPPORTS AND DOOR SYSTEMS PASSAGIO


TELESCOPIC SUPPORT

Telescopic support 50 x 50 x 4 mm

For mounting heavy doors, fire doors, radiators and heavy duty equipment.

Material thickness (mm): 4 mm
Material: Galvanised steel

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
6605	2,47 - 2,75 m	275	119917	16,300	1 PCE / 10 PCE
6606	2,72 - 3,00 m	300	119919	17,700	1 PCE / 10 PCE
6607	2,97 - 3,25 m	325	119929	19,100	1 PCE / 10 PCE
6608	3,22 - 3,50 m	350	119930	20,500	1 PCE / 10 PCE
6609	3,47 - 3,75 m	375	119931	21,900	1 PCE / 10 PCE
6610	3,72 - 4,00 m	400	119933	23,300	1 PCE / 10 PCE




Telescopic support 75 x 50 x 4 mm

For mounting heavy doors, fire doors, radiators and heavy duty equipment.

Material thickness (mm): 4 mm
Material: Galvanised steel

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
6615	2,47 - 2,75 m	275	119937	20,400	1 PCE / 10 PCE
6616	2,72 - 3,00 m	300	119938	22,200	1 PCE / 10 PCE
6617	2,97 - 3,25 m	325	119939	23,900	1 PCE / 10 PCE
6618	3,22 - 3,50 m	350	119940	25,800	1 PCE / 10 PCE
6619	3,47 - 3,75 m	375	119941	27,400	1 PCE / 10 PCE
6620	3,72 - 4,00 m	400	119943	29,200	1 PCE / 10 PCE




Telescopic support 100 x 50 x 4 mm

For mounting heavy doors, fire doors, radiators and heavy duty equipment.

Material thickness (mm): 4 mm
Material: Galvanised steel

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
6625	2,47 - 2,75 m	275	119899	24,700	1 PCE / 10 PCE
6626	2,72 - 3,00 m	300	119901	26,800	1 PCE / 10 PCE
6627	2,97 - 3,25 m	325	119902	29,000	1 PCE / 10 PCE
6628	3,22 - 3,50 m	350	119903	31,100	1 PCE / 10 PCE
6629	3,47 - 3,75 m	375	119904	33,300	1 PCE / 10 PCE
6630	3,72 - 4,00 m	400	119905	35,500	1 PCE / 10 PCE




Telescopic lintel 50 x 50 x 4 mm

For mounting heavy doors, fire doors, radiators and heavy duty equipment.

Material thickness (mm): 4 mm
Material: Galvanised steel

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
6645	0,76 - 1,00 m	100	119908	7,400	1 PCE / 10 PCE
6646	1,01 - 1,25 m	125	119909	8,800	1 PCE / 10 PCE
6647	1,26 - 1,50 m	150	119910	10,200	1 PCE / 10 PCE



SUPPORTS AND DOOR SYSTEMS PASSAGIO


TELESCOPIC SUPPORT

Telescopic lintel 75 x 50 x 4 mm

For mounting heavy doors, fire doors, radiators and heavy duty equipment.

Material thickness (mm): 4 mm
Material: Galvanised steel

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
6655	0,76 - 1,00 m	100	119911	8,300	1 PCE / 10 PCE
6656	1,01 - 1,25 m	125	119913	10,100	1 PCE / 10 PCE
6657	1,26 - 1,50 m	150	119914	11,800	1 PCE / 10 PCE




Telescopic lintel 100 x 50 x 4 mm

For mounting heavy doors, fire doors, radiators and heavy duty equipment.

Material thickness (mm): 4 mm
Material: Galvanised steel

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
6665	0,76 - 1,00 m	100	119915	9,900	1 PCE / 10 PCE
6666	1,01 - 1,25 m	125	119916	12,100	1 PCE / 10 PCE
6667	1,26 - 1,50 m	150	119918	14,200	1 PCE / 10 PCE




Door frame profile

Application area: walls, profiles pre-stamped to DIN standard unfinished construction dimensions.

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005

Item number	Description	Length (cm)	Order number	Weight (kg/m/pc)	Package/ Large pack
5261	U 50-06	130	100983	0,800	1 PCE / 100 PCE
5262	U 75-06	130	100984	0,950	1 PCE / 100 PCE
5263	U 100-06	130	100985	1,100	1 PCE / 100 PCE



SUPPORTS AND DOOR SYSTEMS
PRODUCT CLASS 6400



PASSAGIO CA DOOR SUPPORT SYSTEM

The demands placed on door systems in interior design are constantly increasing - from sound and fire protection to increasing visual demands. This leads to higher door leaf weights and increased opening cycles, which can lead to visible cracks in wall surfaces. Conventional solutions such as UA profiles reach their static limits here. The Passagio CA door support system from Protektor offers a robust, load-bearing solution for heavy doors and protects against damage caused by repeated loading. It has been specially developed to be considered efficiently in the planning phase and represents an economical alternative to oversized square tubes.

With Passagio, planners, building owners and specialised contractors benefit from simpler implementation and high stability.



Wall height	Wall opening height	CA 50-50-20 (4850)			CA 75-50-20 (4851)			CA 100-50-20 (4852)		
		Wall opening width			Wall opening width			Wall opening width		
		≤ 0,885 m	≤ 1,010 m	≤ 1,135 m*	≤ 0,885 m	≤ 1,010 m	≤ 1,135 m*	≤ 0,885 m	≤ 1,010 m	≤ 1,135 m*
≤ 3,00 m	≤ 2,26 m	215 kg	190 kg	165 kg	250 kg	220 kg	195 kg	280 kg	245 kg	215 kg
≤ 3,50 m		125 kg	110 kg	95 kg	145 kg	125 kg	110 kg	160 kg	140 kg	125 kg
≤ 4,00 m		85 kg	75 kg	65 kg	100 kg	85 kg	75 kg	110 kg	100 kg	85 kg
≤ 4,50 m		65 kg	55 kg	50 kg	75 kg	65 kg	60 kg	80 kg	75 kg	65 kg

* For wall opening widths >1.02 m, the lintel profile (5261, 5262 and 5263) is not sufficient. In this case, the lintel must also be created using a CA profile.


SUPPORTS AND DOOR SYSTEMS PASSAGIO

CA DOOR SUPPORT SYSTEM

CA door support profile

Application area for the connection of heavy doors in drylining walls

Material thickness (mm): 2 mm
Material: S320 GD + ZM




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4850	CA 48,8 - 50 - 20	300	119362	48,8	2,440	1 PCS / 100 BUN
NEW	CA 48,8 - 50 - 20	400	119363	48,8	2,440	1 PCS / 100 BUN
NEW 4851	CA 73,8 - 50 - 20	300	119365	73,8	2,810	1 PCS / 100 BUN
NEW	CA 73,8 - 50 - 20	400	119366	73,8	2,810	1 PCS / 100 BUN
NEW 4852	CA 98,8 - 50 - 20	300	119367	98,8	3,210	1 PCS / 100 BUN
NEW	CA 98,8 - 50 - 20	400	119368	98,8	3,210	1 PCS / 100 BUN

CA Connection bracket set

For fixing CA profiles to the floor and ceiling.
Consisting of:
2 x connection bracket
4 x mounting set

Material thickness (mm): 3 mm
Material: S320 GD + ZM




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4536	pour CA 50	119371	44	0,638	1 PCE / 100 PCE

CA Connection bracket set

For fixing CA profiles to the floor and ceiling.
Consisting of:
2 x connection bracket
4 x mounting set

Material thickness (mm): 3 mm
Material: S320 GD + ZM




Item number	Description	Order number	Width (mm)	Weight (kg/pc)	Package/ Large pack
NEW 4537	for CA 75	119372	69	0,985	1 PCE / 100 PCE

CA Connection bracket set

For fixing CA profiles to the floor and ceiling.
Consisting of:
2 x connection bracket
4 x mounting set M8 8.8

Material thickness (mm): 3 mm
Material: S320 GD + ZM



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4538	CA 100	119373	94	1,330	1 PCE / 100 PCE



PASSAGIO PARAPETS AND CEILING SKIRTS

Thanks to the flexible system design, our C-BS profiles and BS mounting brackets can be used to easily create both balustrades and ceiling skirts. The recommended construction variants and details can be found on our homepage and in the technical brochures for each system.

Parapets:

The Protektor balustrades offer safe fall protection in lightweight construction and are based on the proven edificio lightweight steel profiles. Different minimum heights apply depending on the fall height:

- Up to 12.00 m fall height: parapet height ≥ 0.90 m
- Over 12.00 m fall height: parapet height ≥ 1.10 m

Ceiling skirts:

Different types of partition wall systems and floor-to-ceiling glazing are usually connected to ceiling skirts as mullion-transom constructions. Protector ceiling skirts are available in two design variants up to a height of 1.50 m:

- Protektor ceiling skirting system 75: For heights up to 1.00 m
- Protektor ceiling skirt system 100: For heights up to 1.50 m

The two variants differ in terms of the component width and the anchoring options, which are selected depending on the requirements and the height of the partition wall to be connected. All relevant technical information can be found in the respective technical brochure.

Please note that a structural analysis by a structural engineer is required for load-bearing constructions. Subject to technical changes.

passagio
SUPPORTS AND DOOR SYSTEMS


Product infos
View now »



SUPPORTS AND DOOR SYSTEMS PASSAGIO
BALUSTRADES AND CEILING SKIRTS

C-parapet/apron profile

Material thickness (mm): 2 mm
Material: S320 GD + ZM




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4859	C-BS 75-50-20	100	119954	73,8	3,250	1 PCE / 252 BUN

C-parapet and ceiling apron profile

Application area as stud profile for parapets or ceiling skirts

Material thickness (mm): 2 mm
Material: S320 GD + ZM




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4862	C-BS 100-50-20	100	119338	98,8	3,250	1 PCE / 252 BUN
NEW 4863	C-BS 100-50-20	120	119339	98,8	3,900	1 PCE / 210 BUN
NEW 4864	C-BS 100-50-20	150	119515	98,8	3,900	1 PCE / 210 BUN

Mounting bracket BS 65

Mounting bracket for attaching C-BS profiles to parapets or ceiling aprons

Material thickness (mm): 5 mm
Material: S320 GD + ZM




Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4534	BS LW 200x100x65x5 mm	119955	65	0,672	1 PCE / 25 PCE

Mounting bracket BS 90

Mounting bracket for attaching C-BS profiles to parapets or ceiling aprons

Material thickness (mm): 5 mm
Material: S320 GD + ZM



Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 4535	BS LW 200x100x90x5 mm	119328	90	0,950	1 PCE / 25 PCE



PASSAGIO SLIDING DOOR ELEMENT FOR THREE WIDTHS AND TWO HEIGHTS

Our passagio sliding door element is completely made of galvanised steel and is suitable for installation with wooden frames.

The details and technical solutions make the difference in terms of functionality and performance, both during installation and when using the sliding door.

Easy to install

Thanks to the passagio sliding door element, the assembly and installation steps of the sliding door are very fast and flexible.

Small size, maximum results

Thanks to a system that optimises storage, up to 6 standard sizes can be installed with just one product.

 **passagio**
SUPPORTS AND DOOR SYSTEMS

Product video
View now »



SUPPORTS AND DOOR SYSTEMS PASSAGIO

SUPPORTS AND DOOR SYSTEMS PASSAGIO

Sliding door element Installation set

Sliding door element for wooden frames. Suitable for three door widths: 610 mm, 735 mm and 860 mm and two door heights: 1985 mm and 2110 mm. Removable running track, with damping on both sides as standard. Guides on the installation element for direct installation in the drywall. Maximum door leaf thickness: 42 mm. Suitable for doors up to 80 kg.

Material: Galvanised steel




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6400	C 75 wall thickness 100/125	225	115798		28,000	1 PCE / 25 PCE

Connecting element for double sliding doors

Connecting element for connecting two sliding door elements article 6400 for making a double door. For door widths 610+610 mm, 735 + 735 mm and 860 + 860 mm.

Material: Galvanised steel




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6401	for article 6400	34	115799		1,100	1 PCE / 25 PCE

Extension set for special heights sliding doors

Extension kit for sliding door element article 6400, for door leaf heights up to 2700 mm. Extension of height in 5 cm steps. Pre-punched extension profiles and additional cross braces.


Material: Galvanised steel



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6402	for article 6400	120	115800		9,000	1 PCE / 25 PCE


Extension set for sliding glass doors

Extension set for article 6400. Clamp (2 pieces) especially for glass doors. Suitable for glass doors up to 80 kg.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6403	for article 6400	40	115801		1,000	1 PCE / 25 PCE

PASSAGIO SLIDING DOOR ELEMENT

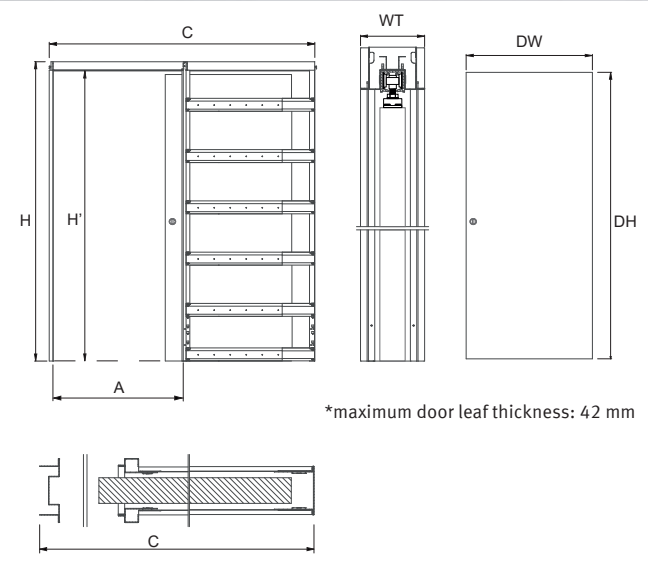


TECHNICAL DATA - Ref.No. 6400			
DW x DH door leaf- dimensions	C x H Item - dimensions	A x H' Passage dimensions	WT Finished wall thickness
610 x 1985 mm	1569 x 2085 mm	640 x 2015 mm	100/125 mm
610 x 2110 mm	1569 x 2210 mm	640 x 2140 mm	100/125 mm
735 x 1985 mm	1569 x 2085 mm	765 x 2015 mm	100/125 mm
735 x 2110 mm	1569 x 2210 mm	765 x 2140 mm	100/125 mm
860 x 1985 mm	1819 x 2085 mm	890 x 2015 mm	100/125 mm
860 x 2110 mm	1819 x 2210 mm	890 x 2140 mm	100/125 mm

PASSAGIO CONNECTING ELEMENT FOR DOUBLE SLIDING DOORS

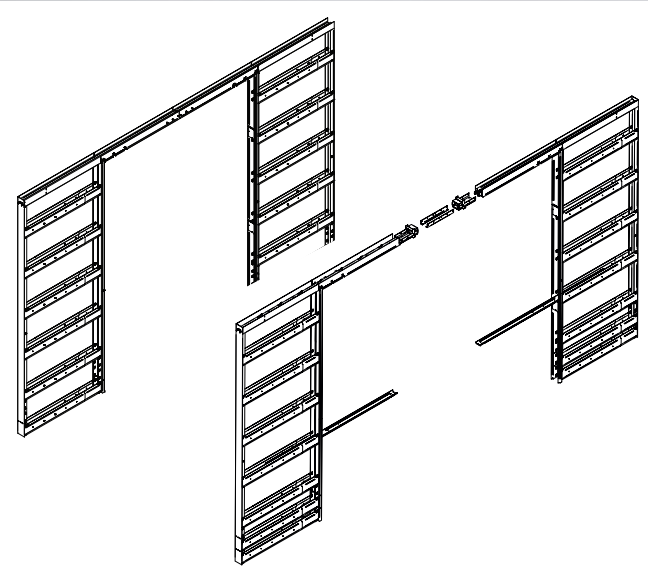

TECHNICAL DATA - Ref.No. 6401 IN CONJUNCTION WITH 6400			
DW x DH door leaf- dimensions	C x H Item - dimensions	A x H' Passage dimensions	WT Finished Wall thickness
610+610 x 1985 mm	3035 x 2085 mm	1230 x 2015 mm	100/125 mm
610+610 x 2110 mm	3035 x 2210 mm	1230 x 2140 mm	100/125 mm
735+735 x 1985 mm	3035 x 2085 mm	1480 x 2015 mm	100/125 mm
735+735 x 2110 mm	3035 x 2210 mm	1480 x 2140 mm	100/125 mm
860+860 x 1985 mm	3535 x 2085 mm	1730 x 2015 mm	100/125 mm
860+860 x 2110 mm	3535 x 2210 mm	1730 x 2140 mm	100/125 mm

PASSAGIO EXTENSION SET FOR SPECIAL HEIGHTS OF SLIDING DOOR ELEMENT

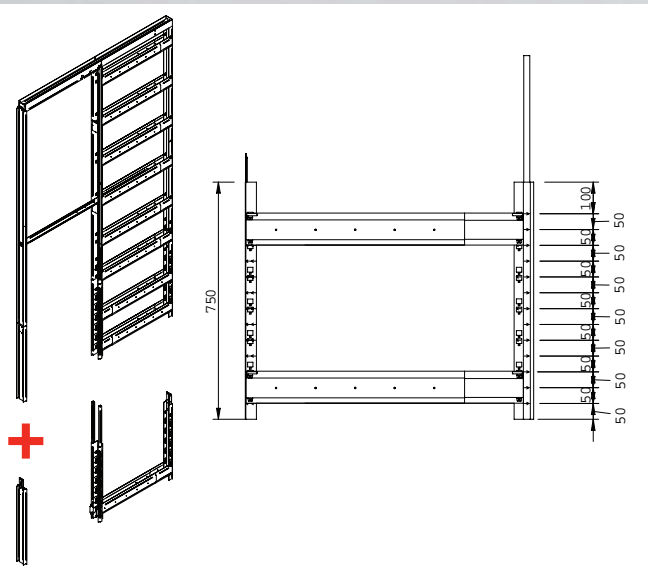

TECHNICAL DATA - Ref.No. 6402 IN CONJUNCTION WITH 6400			
DH door leaf- dimensions	H Item - dimensions	H' Pass-through height	WT Finished Wall thickness
2210 mm	2310 mm	2240 mm	100/125 mm
2260 mm	2360 mm	2290 mm	100/125 mm
2310 mm	2410 mm	2340 mm	100/125 mm
2360 mm	2460 mm	2390 mm	100/125 mm
2410 mm	2510mm	2440 mm	100/125 mm
2460 mm	2560 mm	2490 mm	100/125 mm
2510 mm	2610 mm	2540 mm	100/125 mm
2560 mm	2660 mm	2590 mm	100/125 mm
2610 mm	2710 mm	2640 mm	100/125 mm
2660 mm	2760 mm	2690 mm	100/125 mm
2710 mm	2810 mm	2740 mm	100/125 mm
2760 mm	2860 mm	2790 mm	100/125 mm




LUMINO – LED-LIGHTNING DESIGN

The new PROTEKTOR product LUMINO brings the right light for extraordinary lightning concepts. Wherever you need unusual accents in room design the aluminium profiles provide a special atmosphere. Whether as an LED profile or magnetic LED strip for fixing to metal surfaces, Lumino lets your professional drywall projects shine in modern light.



Product video
View now »

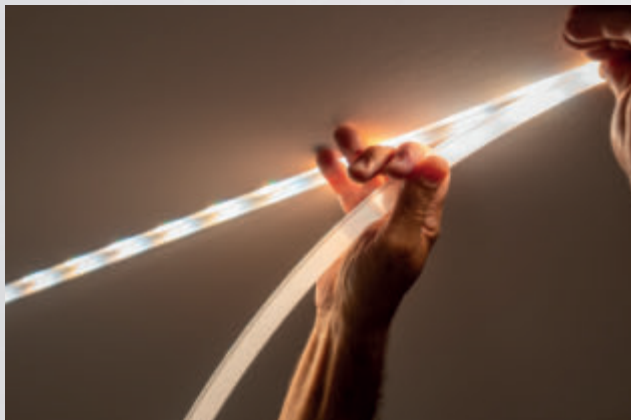


LED-LIGHTNING DESIGN LUMINO
PRODUCT CLASS 6660

LED cove profile white

Vouten profile white (similar to RAL9003) with opal plastic cover for LED strips.
Suitable for LED strips with max. width 10 mm and max. 20 Watt/m.
LED rail without LED strips.
For panel thickness 12.5 mm

Material: Aluminum, white coated
Material thickness (mm): 1 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing.
This does not constitute grounds for complaint.




NEW

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6524	2000 mm	200	119114	93	0,806	4 PCE / 400 BOX

LED render stop profile

Connecting and end profile with opal plastic cover for LED strips.
Suitable for LED strips with max. width 14 mm and max. 15 Watt/m.
LED rail without LED strips.
For panel thickness 12.5 mm

Material: Aluminum
Material thickness (mm): 1 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing.
This does not constitute grounds for complaint.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6522	2000 mm	200	118335		0,446	4 PCE / 100 BOX

LED surface profile

Connection profile with opal plastic cover on both sides for LED strips.
Suitable for LED strips with max. width 14 mm and max. 15 Watt/m.
LED rail without LED strips.

Material: Aluminum
Material thickness (mm): 1 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing.
This does not constitute grounds for complaint.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6523	2000 mm	200	118336		0,688	4 PCE / 100 BOX

LED surface profile wide

Connection profile on both sides with opal plastic cover for LED strips.
Suitable for LED strips with a maximum width of 20 mm and a maximum of 20 watts/m.
LED track without LED strips.
For plate thickness 12.5 mm
Can be used as main lighting in conjunction with a 20 watt LED strip.

Material: Aluminum
Material thickness (mm): 1 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing.
This does not constitute grounds for complaint.



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6533	2000 mm	200	119865		0,688	4 PCE / 100 BOX


LED-LIGHTNING DESIGN LUMINO
PRODUCT CLASS 6660

LED internal corner profile

Internal corner profile with opal plastic cover for LED strips.
Suitable for LED strips with max. width 14 mm and max. 15 watts/m.
LED profile without LED strips
For panel thickness 12.5 mm

Material: Aluminum
Material thickness (mm): 1 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing. This does not constitute grounds for complaint.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6542	2000 mm	200	118337		1,220	4 PCE / 100 BOX




LED External corner profile

External corner profile with opal plastic cover for LED strips.
Suitable for LED strips with max. width 14 mm and max. 15 watts/m.
LED profile without LED strips
For panel thickness 12.5 mm

Material: Aluminum
Material thickness (mm): 1 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing. This does not constitute grounds for complaint.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6543	2000 mm	200	118338		0,720	4 PCE / 100 BOX



LED Protective tube black

Prevents the penetration of filler.
Reusable.

Material: PVC

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6547	5000 mm	500	118342		0,430	1 PCE / 100 BOX



LED Protective tube wide black

Prevents the penetration of filler.
Reusable.
Only for the use of the surface profile wide (ref. 6533).

Material: PVC

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6534	5000 mm	500	119866		0,430	1 PCE / 100 BOX



LED-LIGHTNING DESIGN LUMINO
PRODUCT CLASS 6660

Opal plastic cover

Opal cover as a spare part.
The profiles are already fitted with the opal cover.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6546	2000 mm	200	119320		0,060	4 PCE / 400 BOX




Flexible LED Profile

Flexible surface profile with integrated silicone tube for holding LED strips.
Suitable for LED strips with a max. width of 10 mm and max. 15 watts/m. Light sources are not included in the scope of delivery.
Minimum panel thickness 12.5 mm

Material: Galvanised steel
Material thickness (mm): 0,6 mm
Norm: EN 14195:2005
Notes: Please observe mounting instructions

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6544	2000 mm	200	120301		0,800	2 PCE / 60 BOX




LED alu-ceiling rail sunset

For creating shadow joints. Suitable for LED strips with max. width 18 mm and max. 30 watts/m. LED profile Lumino without LED strip. For panel thickness 12.5 mm.

Material: Aluminum
Material thickness (mm): 1,5 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing. This does not constitute grounds for complaint.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6518	2000 mm	200	118332		0,784	4 PCE / 100 BOX




LED alu-ceiling rail sunrise

For creating a shadow joint.
Suitable for LED strips with max. width 12 mm and max. 30 watts/m. LED track Lumino without LED strip. For panel thickness 12.5 mm.

Material: Aluminum
Material thickness (mm): 1,5 mm
Notes:
The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing. This does not constitute grounds for complaint.

Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6538	2000 mm	200	118334		0,588	4 PCE / 100 BOX



LED-LIGHTNING DESIGN LUMINO


PRODUCT CLASS 6660

LED alu-ceiling rail sunset white

For creating shadow joints. Suitable for LED strips with max. width 18 mm and max. 30 watts/m. LED profile Lumino without LED strip. For panel thickness 12.5 mm.

Material: Aluminum, white coated
Material thickness (mm): 1,5 mm
Notes:
Colour: similar to RAL 9010

The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing. This does not constitute grounds for complaint.




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6519	2000 mm	200	118331		0,784	4 PCE / 100 BOX

LED alu-ceiling rail sunrise white

For creating a shadow gap. Suitable for LED strips with max. width 12 mm and max. 30 watts/m. LED track Lumino without LED strip. For panel thickness 12.5 mm.

Material: Aluminum, white coated
Notes:
similar to RAL 9010

The surface of the profiles (anodised or powder-coated) may show small scratches, press marks and discolouration due to the pressing process and mechanical processing. This does not constitute grounds for complaint.



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6541	1500 mm	150	117264		0,450	4 PCE / 50 BOX
6539	2000 mm	200	118333		0,588	4 PCE / 100 BOX

LED U-profile

For the installation with LED strips. Can also be used as a cable duct. Suitable for LED strips with max. 20 watts or 25 watts depending on the installation situation. Can be used as main lighting in conjunction with a 25 W LED strip. LED profile with opal cover without LED strips.

Material: Aluminum



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6690	black	200	120428	18,5	0,570	4 PCE / 100 BOX
NEW 6691	white	200	120429	18,5	0,570	4 PCE / 100 BOX

Accessories LED U-profile

Aluminium end caps matching LED U-profile with a width of 18.5 mm. Incl. screws.

Material: Aluminum



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6696	End cap black	0	120433		0,010	1 PCE / 100 BAG
NEW 6697	End cap white	0	120434		0,010	1 PCE / 100 BAG

LED-LIGHTNING DESIGN LUMINO

PRODUCT CLASS 6660

Mounting clip

Transparent plastic mounting clip for flush mounting the LED U-profiles with a width of 18.5 mm on ceilings or walls. The bag contains 2 clips incl. screws.

Material: PVC



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6698	for 6690 / 6691	0	120435		0,010	2 PCE / 200 BAG

LED U-profile

LED U-profile with opal plastic cover for mounting LED strips. Can also be used as a cable duct. Flexible use due to filigree design, e.g. for furniture, moulded parts, etc. Suitable for LED strips with max. 15 watts/m.
LED profile with opal cover without LED strips.

Material: Aluminum




Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6679	black	200	120431	13,4	0,110	4 PCE / 100 BOX
NEW 6680	white	200	120430	13,4	0,110	4 PCE / 100 BOX

Accessories LED U-profile

End cap set suitable for LED U-profile with a width of 13.4 mm.
Bag contains 1 x closed end cap and 1 x end cap with cable guide.

Material: PVC



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6685	End cap black	0	120437		0,010	1 PCE / 100 BAG
NEW 6686	End cap white	0	120441		0,010	1 PCE / 100 BAG

Mounting clip

Stainless steel mounting clip for flush mounting the LED U-profiles with a width of 13.4 mm on the ceiling or wall.
The bag contains 4 clips.

Material: Stainless steel



Item number	Description	Length (cm)	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
NEW 6687	for 6680 / 6679	0	120442		0,010	4 PCE / 400 BAG



MADE TO FIT YOUR NEEDS

The right tool makes all the difference. With PROTEKTOR profile cutters you can always cut profiles to the right length and to suit the job, with the right angle, precisely, safely and correctly. Blade and cutting block are both made from quality alloy, tempered special steel. Both the material and the way it is processed provide the basis for a long life in daily use. Quality tongs for crimping profiles, and other high-quality accessories for edging and punching tools complete the product range.

Product video
View now »



TOOLS

PRODUCT CLASS 6620

MAXI Profile cutter without accessories

For cutting UW, CW, (50, 75 and 100) CD and UD profiles with a sheet metal thickness of up to 0.7 mm.

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6432	for U, C, CD, UD	101793		14,000	1 PCE / 10 BOX



Replacement blade

Item number	Description	Order number	Width (mm)	Weight (kg/m/pc)	Package/ Large pack
6427	for 6432	101785		0,500	1 PCE / 10 PCE
6429	Punch Ø 25 mm	101796		1,000	1 PCE / 10 PCE
6430	Punch Ø 6.2 mm	101797		0,250	1 PCE / 10 PCE
6431	Length stop	101800		0,200	1 PCE / 10 PCE



Profile shear

Special cutter with a premarked template for ensuring precise cutting of PVC profiles at a right angle.

Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
1452		26	102376		50 PCE / 16 BOX





FACADE-/VENTILATION PROFILES

PROTEKTOR facade and ventilation profiles stand for design and quality that is recognisable and manufactured in Germany.

GENERAL NOTES REGARDING THE INSTALLATION OF FACADE-/VENTILATION PROFILES

The guidelines of board and substructure manufacturers as well as all applicable requirements, standards and directives must be taken into consideration and observed when selecting and installing the facade-/ventilation profiles.

Like all products, materials and building materials, facade profiles face thermal expansion in the building. The temperature limits of -20 °C and +80 °C according to DIN 18516-1 must be taken into account.

Additionally, take the installation temperature into consideration and maintain the necessary distances at profile joints. Like most components of rear-ventilated curtain walls, the facade profiles must not be constrained. Always allow for linear expansion in the profiles.

Example: At a temperature difference of 50 °K, the linear expansion of hard PVC profiles is approx. 3.8 mm per metre.

For Aluminium profiles, the linear expansion is approx. 1.2 mm per metre for the same temperature difference.

The facade profiles should generally be shortened to the length or width of the board for installation and ideally the storey height should not be exceeded.

Keep profiles from overlapping. This can be achieved by constructive measures such as notching or mitred profiles.

Please observe the notes relating to the relevant profile applications. The following details are examples. **All PROTEKTOR plastic facade-/ventilation profiles must be installed in a pressure-free and tension-free manner.**

Physical and thermal properties of Aluminium profiles			
Properties	Unit	Test method	Values
Coefficient of linear expansion	K ⁻¹ /m	Leitz-Dilatometer	24 x 10 ⁻⁶

Physical and thermal properties of plastic profiles made of highly impact resistant hard PVC			
Properties	Unit	Test method	Values
Tensile strength	N/mm ²	DIN 53455	48
Elongation	%	DIN 53455	35
Impact resistance	KJ/m ²	DIN 53453	
at +21 °C	KJ/m ²	(short standard rod)	without break
at 0 °C	KJ/m ²	(short standard rod)	without break
at -20 °C	KJ/m ²	(short standard rod)	without break
Notched impact strength at +21 °C	KJ/m ²	DIN 53448	36,0
Notched impact strength at bei 0 °C	KJ/m ²	DIN 53448	7,5
Brinell hardness after 10 and 60 seconds	N/mm ²	DIN 53456	102,7/93,7
Density	g/cm ³	DIN 53479	1.48
Modulus of elasticity	N/mm ²	DIN 53457	2.500
Water absorption after 96 hours	%	DIN 53495	≤ 0,06
Dimensional stability Vicat B	°C	DIN 53460	80
Coefficient of linear expansion	K ⁻¹ /m	Leitz dilatometer	76 x 10 ⁻⁶

MATERIALS, COLOURS

PROTEKTOR Aluminium and PVC facade-/ventilation profiles are manufactured according to the applicable standards. EPDM stands for Ethylene Propylene Diene Monomer, which is a synthetic rubber with exceptional properties. All PROTEKTOR plastic facade profiles are made without lead stabilisers!

PROTEKTOR PVC facade profiles are manufactured in the following standard colours (due to the printing process, the colours depicted here may appear different than the originals).

similar to RAL 9010 white 10	similar to RAL 8014 brown 47
similar to RAL 8004 brick-red 33	similar to RAL 9011 black 90

LIGHT AND WEATHER DURABILITY, FIRE BEHAVIOUR

Our PROTEKTOR hard PVC profiles achieve the highest possible light durability level (level 8) on the wool scale. The formula we have developed together with our suppliers, prevents the usage of waste or reclaimed materials in our products. In accordance with our General Sales terms and conditions (section 6), we provide a guarantee of 5 years for the technical functionality of the facade profiles.

In DIN 4102 Part 4, the polyvinyl chloride (PVC-U), Hard-PVC, which is free of plasticisers, has been classified as building material class B1 – flame resistant – according to DIN 19531.









We accept no liability for any printing errors or other changes. Subject to change. Previous cat logues are hereby rendered invalid.











FACADE PROFILES OVERVIEW

ALUMINIUM



ALUMINIUM PROFILES

Board thick-ness/ structure	Board Board manufacturer/ type	Corner profiles, exterior corners						Corner profile, inner corners	
									
6 mm	Eternit Trespa Fundermax Rockpanel FibreCem		9444 9445					9432	9436 9437
8 mm	Eternit Trespa Fundermax Rockpanel FibreCem	9440 9441	9446 9447					9432	9436 9437
10 mm	Eternit Trespa Fundermax Rockpanel FibreCem	9442 9443	9449	9080		9430		9432	9436 9437
12 mm	Eternit Eternit Cedral Click** Trespa Fundermax Rockpanel FibreCem	9460 9461		9080**		9430		9432**	9436 9437
13 mm bis 20 mm	Corrugated profiles Trapezoidal profiles Weatherboarding Timber slats			9080 9402		9431	9439	9486*	9436 9437
21 mm bis 28 mm	Eternit-Cedral* Trapezoidal profiles Weatherboarding Timber slats			9484*	9485* matches 9451*	9428*	9438	9486*	9436 9437

Board thick-ness/ structure	Board Board manufacturer/ type	Vertical and horizontal joint profiles						Connecting and edge profiles			
											
6 mm	Eternit Trespa Fundermax Rockpanel FibreCem	9048 9061 9086		9042 9053 9054	9736	9311		9081			
8 mm	Eternit Trespa Fundermax Rockpanel FibreCem	9049 9062 9087	9092	9042 9053 9054	9738	9311		9081	9450		9085
10 mm	Eternit Trespa Fundermax Rockpanel FibreCem	9088	9092	9042 9053 9054		9311		9081	9451		9090
12 mm	Eternit Eternit Cedral Click** Trespa Fundermax Rockpanel FibreCem	9089	9092	9042 9053 9054		9311		9081	9407		
13 mm bis 20 mm	Corrugated profiles Trapezoidal profiles Weatherboarding Timber slats						9027		9408 9409		
21 mm bis 28 mm	Eternit-Cedral* Trapezoidal profiles Weatherboarding Timber slats						9027		9451* for board- strips 10 mm	9487*	

Notes: Some Protektor facade profiles are also suitable for the following manufacturers: Alucobond, Agrob Buchtal, Marazzi, Creaton, Argeton, Möding, Maas, Resopal, Prodema etc.; Facade profiles can be powder coated in RAL and in whole packaging units;

For reference photos featuring Protektor facade profiles,

see <http://protektor.com/de/downloads/technische-unterlagen/fassadenprofile/produktvorstellung/Eigenschaften von Fassadenprofilen> (available in German only);

* Profiles for Eternit-Cedral boards







** Profiles for Eternit-Cedral Clicks boards









FACADE PROFILES OVERVIEW

PVC



PVC PROFILES

Board thick-ness/ structure	Board Board manufacturer/ type	Corner profiles, exterior corners					
							
6 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3569					
8 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3623		3674			
10 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3623		3674	3624		
12 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3623		3674		3504	
13 mm bis 20 mm	Wellprofile Trapezprofile Stülp-schalungen Holzlamellen		3506			3504 3555	3501
21 mm bis 28 mm	Trapezprofile Stülp-schalungen Holzlamellen					3590	

Board thick-ness/ structure	Board Board manufacturer/ type	Corner profile, inner corners		Vertical and horizontal joint profiles					
									
6 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3505	3528 3540	3534		3557 3558		3691	
8 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3505	3528 3540	3535		3546		3658	3588
10 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3505	3528 3540	3536		3547		3609	
12 mm	Eternit Trespa Fundermax Rockpanel FibreCem	3505	3528 3540	3537		3548		3563	3589
13 mm bis 20 mm	Corrugated profiles Trapezoidal profiles Weatherboarding Timber slats	3505	3528 3540		3554		3560 3561	3529 3502	
21 mm bis 28 mm	Trapezoidal profiles Weatherboarding Timber slats		3528 3540					3527	


Notes: Some Protektor facade profiles are also suitable for the following manufacturers: Alucobond, Agrob Buchtal, Marazzi, Creaton, Argeton, Möding, Maas, Resopal, Prodema etc.; For reference photos featuring Protektor facade profiles, see http://protektor.com/de/downloads/technische-unterlagen/fassadenprofile/produkt-vorstellung/Eigenschaften_von_Fassadenprofilen (available in German only)

FACADE PROFILES CONNECTION STRUCTURE

CONNECTING PROFILES WITHOUT COVERED CUTTING EDGES




INSTRUCTIONS FOR APPLICATION

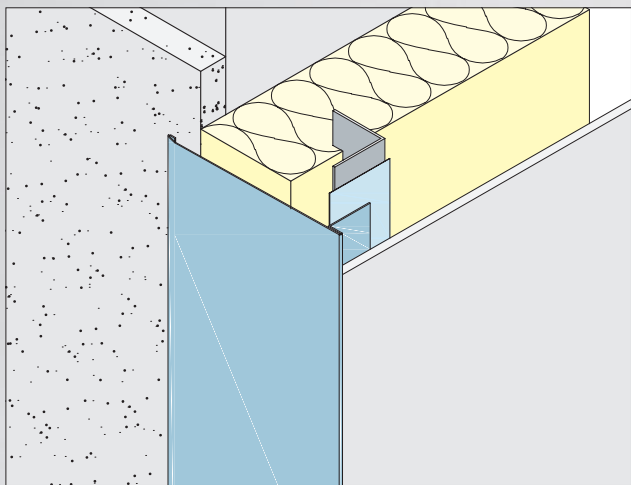

The connecting profiles connect the facade cladding and the different surfaces of the facade, such as the plaster, and thus facilitate a simple and precise transition. They fully cover and protect the cutting edges of the facade boards and cover the substructure on the side.

The connecting profiles may also be used for connections to windows and doors.

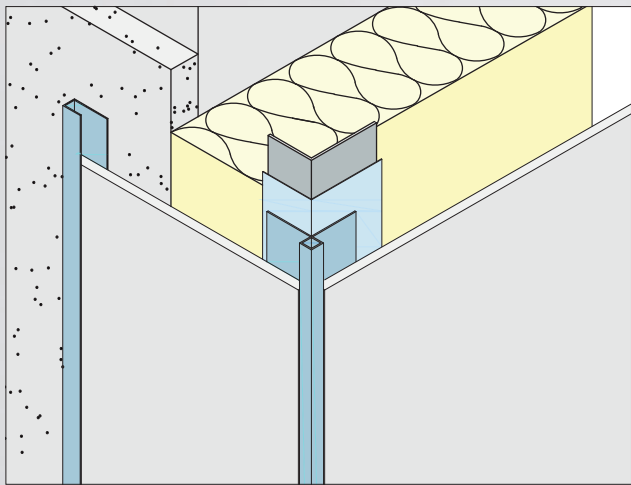


The connection of a curtain wall via a corner to another surface, for example a plastered surface or ETICS, can easily be carried out with an edge profile and a U-edge profile. For example, here with edge profile no. 9440 and U-edge profile no. 9450. Protektor has a large selection of façade profiles.

CORNER PROFILES

CORNER PROFILES WITHOUT COVERED CUTTING EDGES

Corner bead without covered cutting edge Alu

Edge profile for facade cladding up to 6.5 mm.




NEW

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
97018	Aluminum	300	118564	NA - natur	10 PCS / 70 BUN

Corner bead without covered cutting edge Alu


Corner profile for facade cladding up to 8.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9440	Aluminum	300	108197	NA - natur	10 PCS / 70 BUN
9441	Aluminum	300	108198	E6 - E6	10 PCS / 70 BUN

Corner bead without covered cutting edge Alu


Corner profile for facade cladding up to 10.8 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9442	Aluminum	300	108199	NA - natur	10 PCS / 33 BUN
9443	Aluminum	300	108200	E6 - E6	10 PCS / 33 BUN

Corner bead without covered cutting edge Alu


Corner profile for facade cladding up to 12.8 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9460	Aluminum	300	108267	NA - natur	10 PCS / 70 BUN
9461	Aluminum	300	108268	E6 - E6	10 PCS / 30 BUN

Corner bead without covered cutting edge Alu

Corner profile for facade cladding up to 13.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9080	Aluminum	250	101612	NA - natur	10 PCS / 35 BUN

CORNER PROFILES


CORNER PROFILES WITHOUT COVERED CUTTING EDGES

Corner bead without covered cutting edge Alu

Corner profile for facade cladding up to 18 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9402	Aluminum	250	103075	NA - natur	10 PCS / 31 BUN




Corner bead without covered cutting edge Alu

Corner profile for facade cladding up to 25 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9484	Aluminum	300	109702	NA - natur	10 PCS / 20 BUN




Corner bead without covered cutting edge Alu

Corner profile for facade cladding of 25 and 10 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9485	Aluminum	300	109703	NA - natur	10 PCS / 20 BUN




Corner bead without covered cutting edge Alu

Edge and cross profiles for large-format facade cladding up to 12 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9430	Aluminum	250	108210	NA - natur	10 PCS / 32 BUN




Corner bead without covered cutting edge Alu

Corner and cross profiles for large-format facade cladding, weather boarding, corrugated sheets, etc. up to 20 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9431	Aluminum	250	108211	NA - natur	10 PCS / 24 BUN




CORNER PROFILES

CORNER PROFILES WITHOUT COVERED CUTTING EDGES

Corner bead without covered cutting edge Alu


Edge and cross profile for rhombus, wood lamella facades or any type of façade cladding up to 28 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9428	Aluminum	250	109170	NA - natur	10 PCS / 18 BUN

Corner bead Y without covered cutting edge Alu


Y corner profile for rhombus, wood lamella facades or any other facade cladding up to 22 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9439	Aluminum	250	109728	NA - natur	10 PCS / 30 BUN

Corner bead Y without covered cutting edge Alu

Y corner profile for rhombus, wood lamella facades or any other facade cladding up to 28 mm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9438	Aluminum	250	109729	NA - natur	10 PCS / 20 BUN

Corner bead without covered cutting edge PVC

Corner profile for facade cladding up to 6.5 mm.

Notes:
Enclosed PVC push-on profile reduces water ingress.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3569	Hard PVC	300	100737	90 - black	10 PCS / 49 BUN
	Hard PVC	300	100733	10 - white	10 PCS / 49 BUN




Corner bead without covered cutting edge PVC

Corner profile for facade cladding up to 11 mm.

Notes:
Enclosed PVC push-on profile reduces water ingress.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3623	Hard PVC	300	101299	90 - black	10 PCS / 30 BUN



CORNER PROFILES

CORNER PROFILES WITHOUT COVERED CUTTING EDGES


Corner bead without covered cutting edge PVC

Corner profile for facade cladding up to 16 mm.

Notes:
Enclosed PVC push-on profile reduces water ingress.

SALE

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3506	Hard PVC	300	100250	47 - brown	10 PCS / 28 BUN
	Hard PVC	300	100249	33 - brick-red	10 PCS / 28 BUN
	Hard PVC	300	100248	10 - white	10 PCS / 28 BUN
	Hard PVC	300	100251	90 - black	10 PCS / 28 BUN




Corner bead without covered cutting edge PVC

Y corner profile up to 11 mm facade cladding, also an accessory for natural slate panels.

Notes:
Enclosed PVC push-on profile reduces water ingress.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3674	Hard PVC	300	100059	90 - black	10 PCS / 49 BUN




FACADE PROFILES EDGE FORMATION

CORNER PROFILES WITH COVERED CUTTING EDGES



NOTES

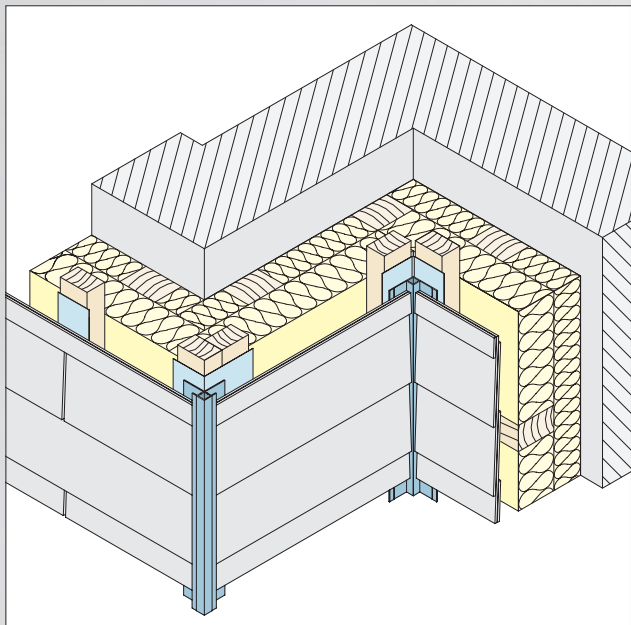



Corner profiles are used for facade design. They fully cover and protect the cutting edges of the facade boards and thus form a clean, precise edge.

The guidelines of board and substructure manufacturers as well as all applicable requirements, standards and directives must be taken into consideration and observed when selecting and installing the corner profiles.

Vertical corner profiles must be fastened at one fixed point at the top. If conditions require multiple fastening points on a profile, the other fastenings must be sliding points.

Profiles must always be mounted without pressure or stress to allow for expansion. Joints must be appropriate for requirements.

Please consult the product literature and the general notes on the installation of facade profiles.



CORNER PROFILES


CORNER PROFILES WITH COVERED CUTTING EDGES

Corner bead with covered cutting edge Alu

Corner profile for facade cladding of up to 6.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9444	Aluminum	300	108201	NA - natur	10 PCS / 36 BUN
9445	Aluminum	300	108202	E6 - E6	10 PCS / 70 BUN




Corner bead with covered cutting edge Alu

Corner profile for facade cladding of up to 8.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9446	Aluminum	300	108203	NA - natur	10 PCS / 33 BUN
9447	Aluminum	300	108204	E6 - E6	10 PCS / 70 BUN




Corner bead with covered cutting edge Alu

Corner profile for facade cladding of up to 10.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9449	Aluminum	300	108206	E6 - E6	10 PCS / 30 BUN




Corner bead with covered cutting edge PVC

Corner profile for facade cladding of up to 11 mm.

Notes:
Enclosed PVC push-on profile reduces water ingress.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3624	Hard PVC	300	101341	90 - black	10 PCS / 30 BUN
	Hard PVC	300	101333	10 - white	10 PCS / 30 BUN
	Hard PVC	300	101336	33 - brick-red	10 PCS / 30 BUN
	Hard PVC	300	101338	47 - brown	10 PCS / 30 BUN

SALE
SALE



CORNER PROFILES


CORNER PROFILES WITH COVERED CUTTING EDGES

Corner bead with covered cutting edge PVC

Corner profile for facade cladding of up to 14 mm.

Notes:
Enclosed PVC push-on profile reduces water penetration. The fitting corner piece profile 3503 in black is suitable for corner formation.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3504	Hard PVC	250	113994	10 - white	10 PCS / 24 BUN
	Hard PVC	250	113996	47 - brown	10 PCS / 24 BUN
	Hard PVC	250	113995	33 - brick-red	10 PCS / 24 BUN
	Hard PVC	250	113997	90 - black	10 PCS / 24 BUN
	Hard PVC	300	114000	47 - brown	10 PCS / 24 BUN
	Hard PVC	300	113999	33 - brick-red	10 PCS / 24 BUN
	Hard PVC	300	113998	10 - white	10 PCS / 24 BUN
	Hard PVC	300	114001	90 - black	10 PCS / 24 BUN




SALE

Corner bead with covered cutting edge PVC

Corner profile for facade cladding of up to 17 mm.

Notes:
Enclosed PVC push-on profile reduces water penetration. The fitting corner piece 3575 in white or black is suitable for corner formation.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3555	Hard PVC	250	100603	90 - black	10 PCS / 24 BUN
	Hard PVC	250	100602	47 - brown	10 PCS / 24 BUN
	Hard PVC	250	100601	33 - brick-red	10 PCS / 24 BUN
	Hard PVC	250	100598	10 - white	10 PCS / 24 BUN
	Hard PVC	300	100607	47 - brown	10 PCS / 24 BUN
	Hard PVC	300	100606	33 - brick-red	10 PCS / 24 BUN
	Hard PVC	300	100609	90 - black	10 PCS / 24 BUN
	Hard PVC	300	100605	10 - white	10 PCS / 24 BUN




Corner bead with covered cutting edge PVC

Corner profile for facade cladding of up to 20 mm.

Notes:
Enclosed PVC push-on profile reduces water ingress.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3501	Hard PVC	250	100197	90 - black	10 PCS / 20 BUN
	Hard PVC	300	100201	90 - black	10 PCS / 20 BUN




Corner bead with covered cutting edge PVC

Corner profile for facade cladding of up to 27 mm.

Notes:
Enclosed PVC push-on profile reduces water ingress.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3590	Hard PVC	300	100913	10 - white	6 PCS / 20 BUN
	Hard PVC	300	100918	90 - black	6 PCS / 20 BUN



SALE

CORNER PROFILES


CORNER PROFILES WITH COVERED CUTTING EDGES

Corner adaptor piece PVC


The 3503 adapter profile is suited for corner profile 3504. The 3575 adapter profile is suited for corner profile 3555.

Notes:
The colour of the yoke corner pieces may differ slightly from the edge profiles.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3503	Hard PVC	5	102260	90 - black	50 PCE / 20 BOX
3575	Hard PVC	8	102273	10 - white	50 PCE / 25 BOX
	Hard PVC	8	102281	90 - black	50 PCE / 25 BOX



FACADE PROFILES EDGE FORMATION APPLICATION INSTRUCTIONS

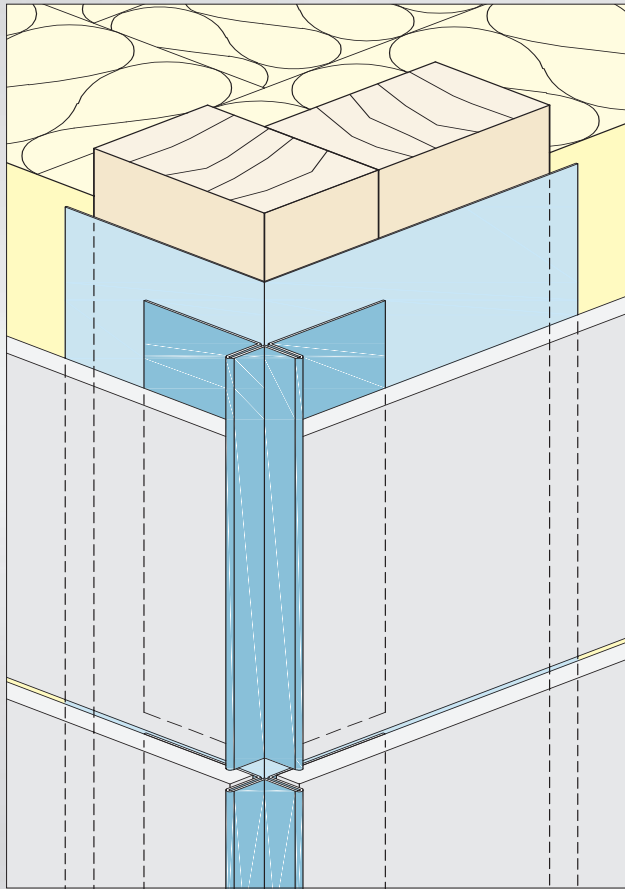

When aluminium corner profiles are used, the vertical profile should may correspond with a joint of the facade cladding. The general use of joint tapes can prevent water from penetrating.

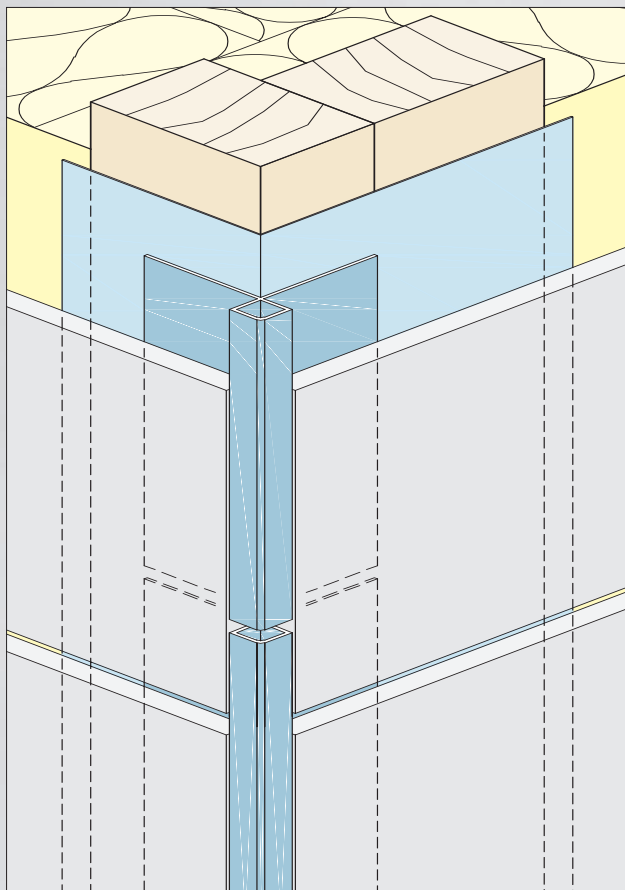


The vertical profile joints of the aluminium corner profiles can also be offset with the joint of the facade cladding. The general use of joint tapes can prevent water from penetrating.


Like most components of curtain walls, the facade profiles must not be constrained. Always allow for linear expansion in the profiles.

FACADE PROFILES EDGE FORMATION

CORNER PROFILES FOR INSIDE CORNERS

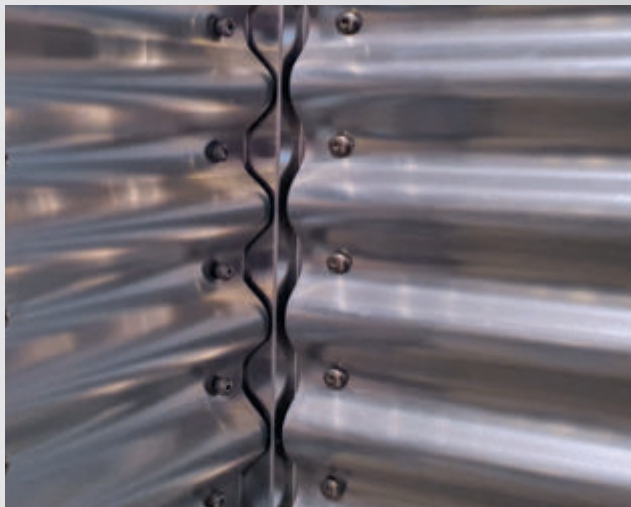

INSTRUCTIONS FOR APPLICATION

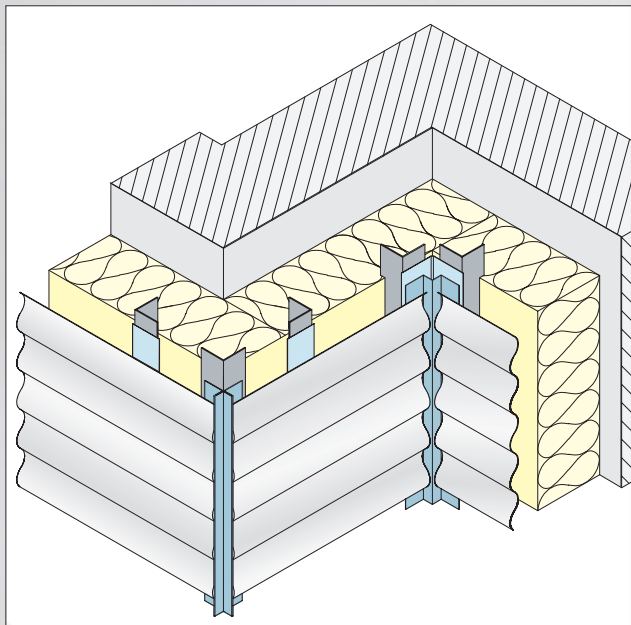



Corner profiles for inside corners form a clean, precise facade cladding stop.

The guidelines of board and substructure manufacturers as well as all applicable requirements, standards and directives must be taken into consideration and observed when selecting and installing the corner profiles.

Vertical corner profiles must be fastened at one fixed point at the top. If conditions require multiple fastening points on a profile, the other fastenings must be sliding points.

Profiles must always be mounted without pressure or stress to allow for expansion. Joints must be appropriate for requirements.

Please consult the product literature and the general notes on the installation of facade profiles.




CORNER PROFILES

INSIDE CORNER

Corner bead for inside corners Alu


Corner profile for interior edges, for facade cladding of up to 12 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9432	Aluminum	250	108212	NA - natur	10 PCS / 90 BUN

Corner bead for inside corners Alu

Corner profile for interior edges on facade cladding of up to 25 mm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9486	Aluminum	300	109704	NA - natur	10 PCS / 100 BUN

Corner bead for inside corners PVC

Corner profile for interior edges on facade cladding of up to 15 mm.


Notes:
Enclosed PVC push-on profile reduces water ingress.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3505	Hard PVC	300	100236	10 - white	10 PCS / 34 BUN
	Hard PVC	300	100239	90 - black	10 PCS / 34 BUN

FACADE PROFILES EDGE FORMATION

APPLICATION INSTRUCTIONS

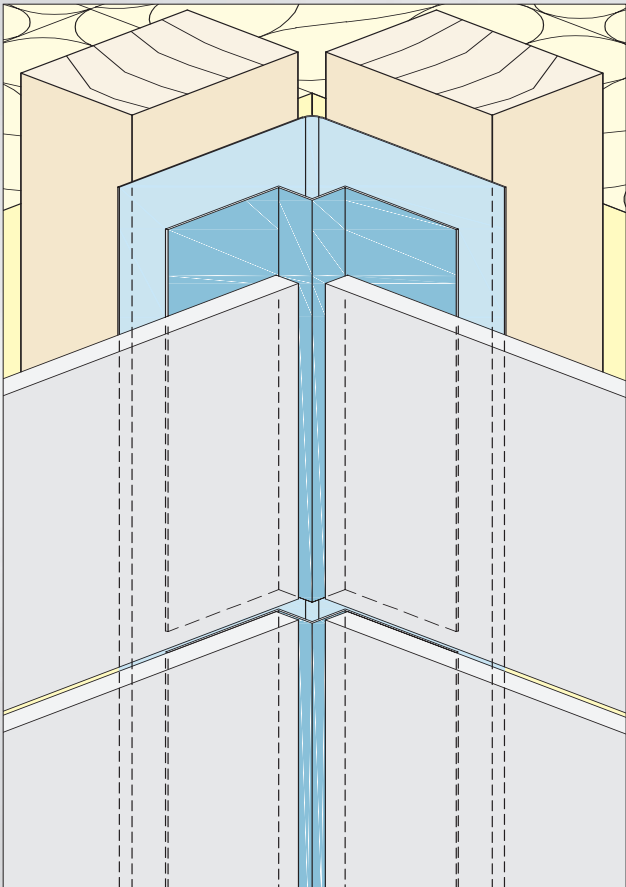

When aluminium corner profiles are used, the vertical profile should may correspond with a joint of the facade cladding. The general use of joint tapes can prevent water from penetrating.

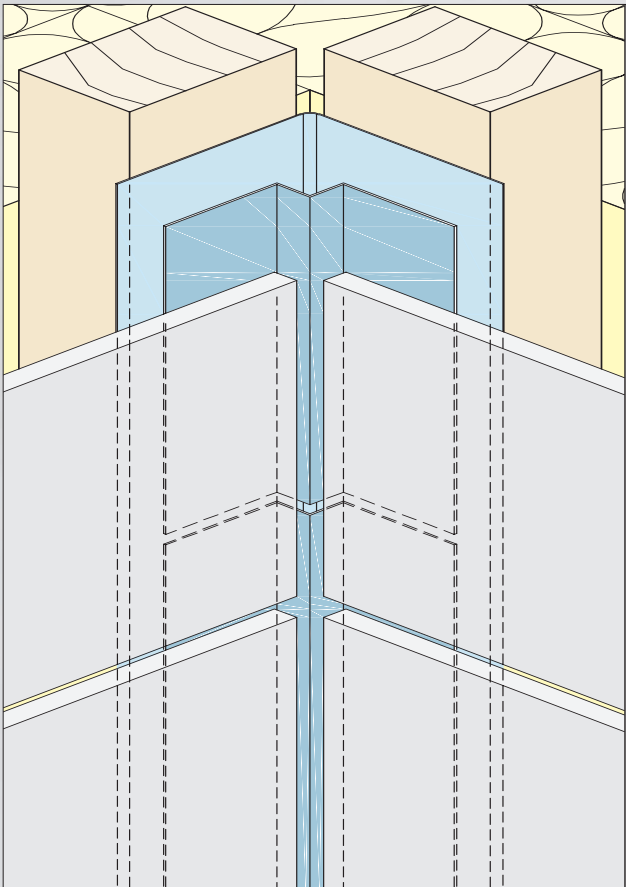

The vertical profile joints of the aluminium corner profiles can also be offset with the joint of the facade cladding. The general use of joint tapes can prevent water from penetrating.


Like most components of curtain walls, the facade profiles must not be constrained. Always allow for linear expansion in the profiles.

FACADE PROFILES REVEAL FORMATION

CONNECTING PROFILES AND PROFILE EDGINGS




NOTES

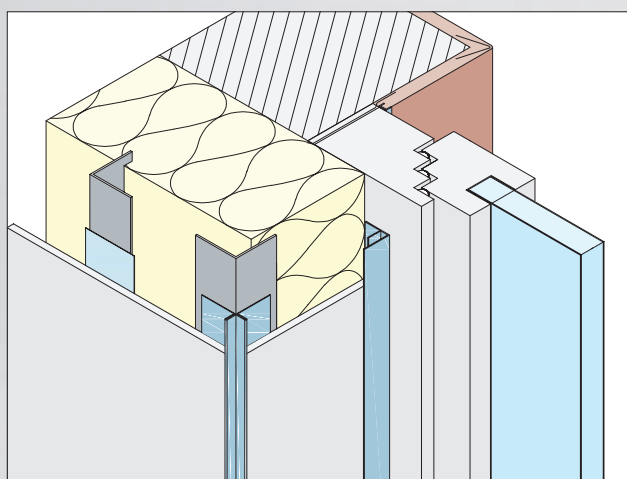

The reveal may be built in different ways. In practice, depending on what the planer/contractor/builder-owner prefers, the facade cladding is continued in the reveal or preexisting reveal systems are taken into account.

Protektor offers different systems or system components for these applications.

By means of f-profiles, the facade boards can be optimally attached in different locations, such as window and door reveals. Due to a covering of the cutting edges with the profiles, irregularities can easily be concealed and aligned.

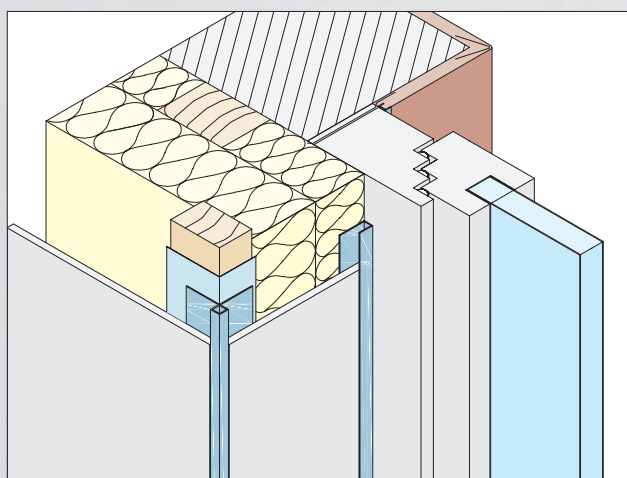


By means of connecting profiles and profile edgings as well as u-profiles, the facade boards can be optimally attached in different locations, such as window and door reveals.

CONNECTING- AND STOP PROFILES

Connecting profile F-profile Alu EV1


F-profile for facade cladding of up to 8.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9085	Aluminum	300	106879	E6 - E6	10 PCS / 40 BUN

Connecting profile F-profile Alu EV1


F-profile for facade cladding of up to 10.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9090	Aluminum	300	110861	E6 - E6	10 PCS / 80 BUN

Connecting profile U-profile Alu

U-profile for facade cladding up to 6.5 mm.




NEW

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
97043	Aluminum	300	118565	NA - natur	10 PCS / 101 BUN

Connecting profile U-profile Alu


U-profile for facade cladding of up to 8.5 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9450	Aluminum	300	108207	NA - natur	10 PCS / 101 BUN

Connecting profile U-profile Alu

U-profile for facade cladding of up to 10.5 mm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9451	Aluminum	300	108196	NA - natur	10 PCS / 150 BUN

CONNECTING- AND STOP PROFILES

Connecting profile U-profile Alu


U-profile for facade cladding of up to 13 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9407	Aluminum	250	101727	NA - natur	10 PCS / 75 BUN

Connecting profile U-profile Alu


U-profile for facade cladding of up to 16 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9408	Aluminum	250	101732	NA - natur	10 PCS / 90 BUN

Connecting profile U-profile Alu


U-profile for facade cladding of up to 20 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9409	Aluminum	250	101735	NA - natur	10 PCS / 75 BUN

Edging profile Alu

Edging profile for facade cladding of 25 mm.



SALE

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9487	Aluminum	300	109705	NA - natur	10 PCS / 50 BUN


Connecting profile U-profile PVC

U-profile for facade cladding of up to 6.5 mm.

SALE

SALE

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3691	Hard PVC	250	102076	10 - white	10 PCS / 153 BUN
	Hard PVC	300	102094	47 - brown	10 PCS / 153 BUN
	Hard PVC	300	102095	90 - black	10 PCS / 153 BUN
	Hard PVC	300	102091	10 - white	10 PCS / 153 BUN
	Hard PVC	500	102107	90 - black	10 PCS / 55 BUN
	Hard PVC	500	102098	10 - white	10 PCS / 55 BUN




CONNECTING- AND STOP PROFILES

Connecting profile U-profile PVC

U-profile for facade cladding of up to 9 mm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3658	Hard PVC	250	101541	10 - white	10 PCS / 119 BUN
	Hard PVC	250	101583	90 - black	10 PCS / 119 BUN
	Hard PVC	250	101556	33 - brick-red	10 PCS / 119 BUN
	Hard PVC	250	101567	47 - brown	10 PCS / 119 BUN
	Hard PVC	300	101607	90 - black	10 PCS / 119 BUN
	Hard PVC	500	101642	90 - black	10 PCS / 40 BUN

SALE




Connecting profile U-profile PVC

U-profile for facade cladding of up to 13 mm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3563	Hard PVC	250	100688	90 - black	10 PCS / 117 BUN
	Hard PVC	300	100693	47 - brown	10 PCS / 117 BUN
	Hard PVC	300	100690	10 - white	10 PCS / 117 BUN
	Hard PVC	300	100692	33 - brick-red	10 PCS / 117 BUN
	Hard PVC	300	100695	90 - black	10 PCS / 117 BUN
	Hard PVC	500	100697	10 - white	10 PCS / 40 BUN
	Hard PVC	500	100702	90 - black	10 PCS / 40 BUN

SALE

SALE



Connecting profile U-profile PVC


U-profile for facade cladding of up to 17 mm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3529	Hard PVC	250	100344	10 - white	10 PCS / 110 BUN
	Hard PVC	250	100345	33 - brick-red	10 PCS / 110 BUN
	Hard PVC	250	100346	47 - brown	10 PCS / 110 BUN
	Hard PVC	250	100347	90 - black	10 PCS / 110 BUN
	Hard PVC	300	100351	90 - black	10 PCS / 110 BUN
	Hard PVC	500	100355	90 - black	10 PCS / 40 BUN
	Hard PVC	500	100354	47 - brown	10 PCS / 40 BUN
	Hard PVC	500	100352	10 - white	10 PCS / 40 BUN

SALE

SALE

SALE



Connecting profile U-profile PVC

U-profile for facade cladding of up to 20 mm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3502	Hard PVC	250	100206	10 - white	10 PCS / 90 BUN
	Hard PVC	250	100209	90 - black	10 PCS / 90 BUN
	Hard PVC	300	100211	10 - white	10 PCS / 90 BUN
	Hard PVC	500	100219	90 - black	10 PCS / 90 BUN
	Hard PVC	500	100216	10 - white	10 PCS / 90 BUN
	Hard PVC	500	100218	47 - brown	10 PCS / 90 BUN

SALE

SALE

SALE




CONNECTING- AND STOP PROFILES

Connecting profile U-profile PVC

U-profile for facade cladding of up to 27 mm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3527	Hard PVC	250	100327	90 - black	10 PCS / 90 BUN
	Hard PVC	250	100324	10 - white	10 PCS / 90 BUN
	Hard PVC	250	100326	47 - brown	10 PCS / 90 BUN
	Hard PVC	300	100328	10 - white	10 PCS / 90 BUN



Connecting profile U-profile PVC

11 x 40 mm U-profile for facade cladding of up to 11 mm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 3609	Hard PVC	250	101017	90 - black	20 PCS / 34 BUN




CONNECTING- AND STOP PROFILES

EDGING / RAIN / PLINTH PROFILES

Rain repelling profile PVC

Rain repellent profile for protecting facade cladding.

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3588	Hard PVC	250	100888	90 - black	8,5 mm	20 PCS / 56 BUN
3589	Hard PVC	250	100897	10 - white	12,5 mm	20 PCS / 56 BUN




Socle profile-Z Alu

Wall base z-profile for covering facade cladding of up to 11.5 mm.




Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
9083	Aluminum	250	101622	NA - natur	11,5 mm	10 PCS / 140 BUN



Socle profile-Z PVC

Wall base z-profile for covering facade cladding of up to 13.5 mm.

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3820	Hard PVC	200	102990	90 - black	13,8 mm	20 PCS / 80 BUN




FACADE PROFILES CONNECTION STRUCTURE

CONNECTING PROFILES WITHOUT COVERED CUTTING EDGES




INSTRUCTIONS FOR APPLICATION

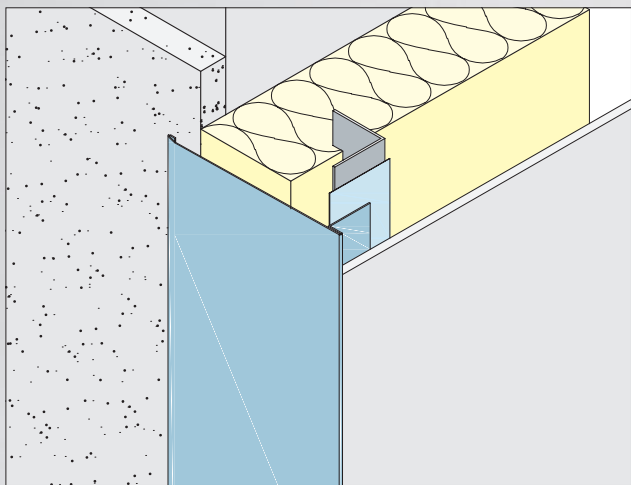

The connecting profiles connect the facade cladding and the different surfaces of the facade, such as the plaster, and thus facilitate a simple and precise transition. They fully cover and protect the cutting edges of the facade boards and cover the substructure on the side.

The connecting profiles may also be used for connections to windows and doors.

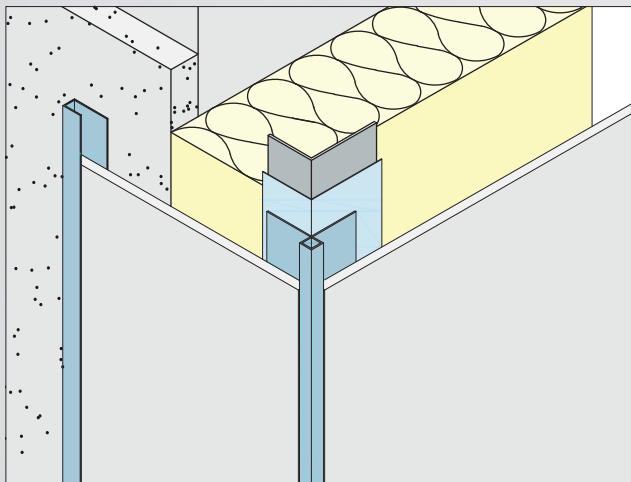


The connection of a curtain wall via a corner to another surface, for example a plastered surface or ETICS, can easily be carried out with an edge profile and a U-edge profile. For example, here with edge profile no. 9440 and U-edge profile no. 9450. Protektor has a large selection of façade profiles.

CONNECTING- AND STOP PROFILES

CONNECTING PROFILES

Connection profile without covered cutting edge Alu


Connection profile for facade claddings of 13 mm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 9081	Aluminum	250	101616	NA - natur	10 PCS / 40 BUN

Connection profile with covered cutting edge PVC


Connection profile for facade cladding of up to 13.5 mm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
 3560	Hard PVC	300	100634	10 - white	10 PCS / 54 BUN
	Hard PVC	300	100637	90 - black	10 PCS / 54 BUN

Connection profile with covered cutting edge PVC


Connection profile for facade cladding of up to 13 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
 3561	Hard PVC	300	100650	10 - white	10 PCS / 40 BUN
	Hard PVC	300	100655	90 - black	10 PCS / 40 BUN

Connection profile with covered cutting edge PVC


Connection profile for facade cladding of up to 17 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3562	Hard PVC	300	100675	90 - black	10 PCS / 36 BUN
	Hard PVC	300	100670	10 - white	10 PCS / 36 BUN


FACADE PROFILES CONNECTION STRUCTURE

APPLICATION INSTRUCTIONS

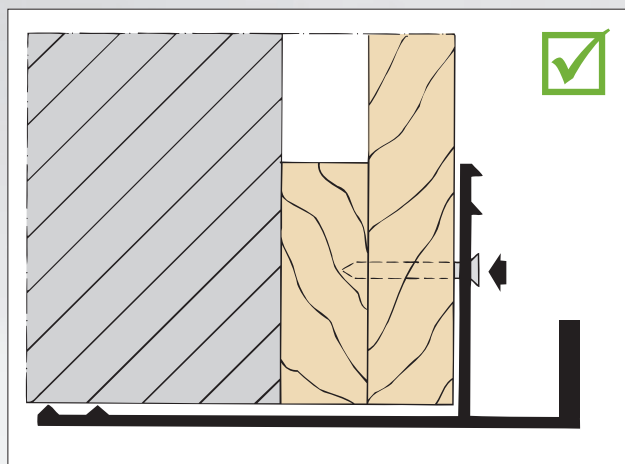


CORRECT

Lightly place the profile in the corner and nail without applying pressure. This ensures that the nailed side does not press inward, which eliminates the risk of tension in the profile.

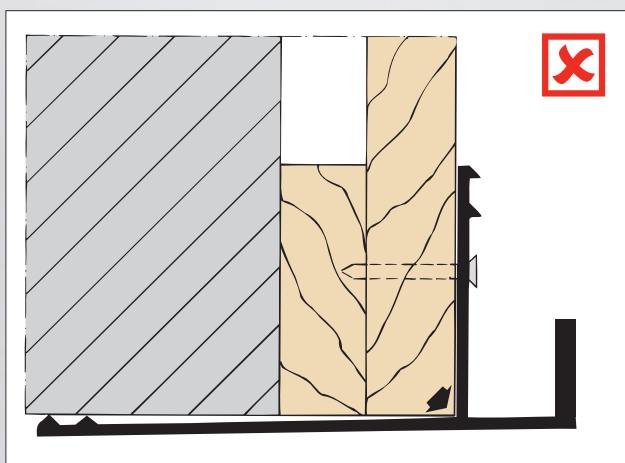

INCORRECT

If the profile is pressed into the corner too tightly, it creates tension on the non-fastened part of the profile, which causes the profile to bend.

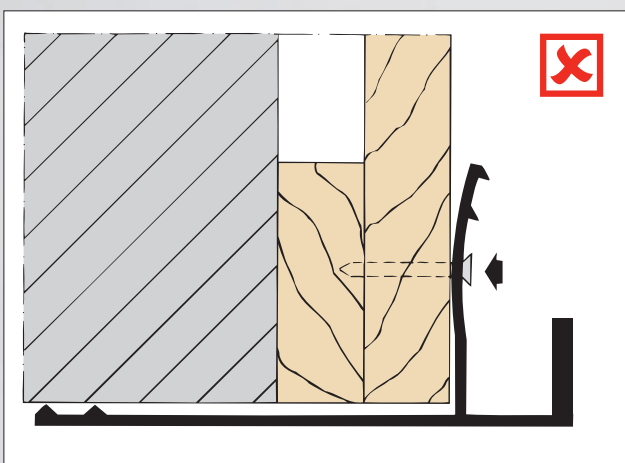

INCORRECT


If the nail is driven in too deeply at the fastening point, tension is created and the profile starts to bend in direct sunlight.

FACADE PROFILES JOINT STRUCTURE

JOINT PROFILES (CORRUGATED PROFILE) VERTICAL AND HORIZONTAL




INSTRUCTIONS FOR APPLICATION

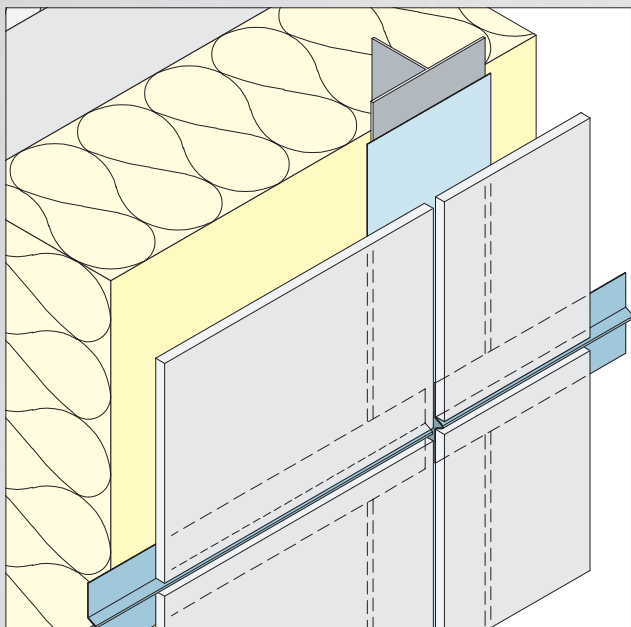

The aluminium joint profile or corrugated profile subtly depicts the joint whilst effectively closing it. The beading along the profile also centres and guides the facade cladding joint. The profiles are therefore available in widths of 6 mm and 9 mm for different joint widths. The corrugated profile may be used horizontally or vertically.

If used horizontally and if no horizontal substructure exists, the profile must be fastened on the rearside of the facade in a sliding manner. Fastening either by means of suitable adhesives or mechanically (screws, rivets etc.), depending on the requirements and distances of the vertical substructure. Please observe the guidelines of the facade cladding manufacturers for this practice.

When installing large facade slabs or boards, ensure that a joint remains as indicated by the slab or boards manufacturer.

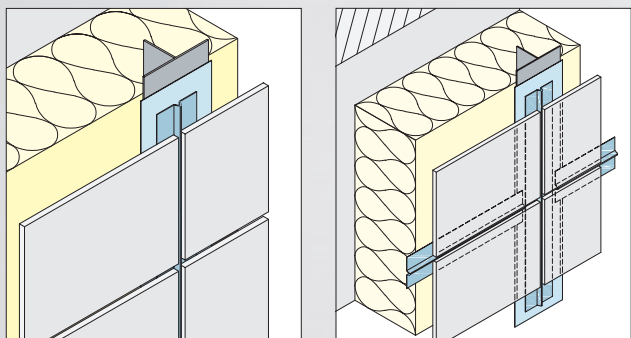

JOINT PROFILES

JOINT PROFILES VERTICAL AND HORIZONTAL


Joint profile vertical and horizontal Alu

Joint or bead profile for joint thickness of 8 mm.

Processing instructions:
Horizontal and vertical installation.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9053	Aluminum	250	101578	NA - natur	20 PCS / 90 BUN
9042	Aluminum	250	101191	90 - black	20 PCS / 90 BUN




Joint profile vertical and horizontal Alu black

Joint or bead profile for joint thickness of 10 mm.


Processing instructions:
Horizontal and vertical installation.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9054	Aluminum	250	108209	90 - black	20 PCS / 150 BUN





INSTRUCTIONS FOR APPLICATION

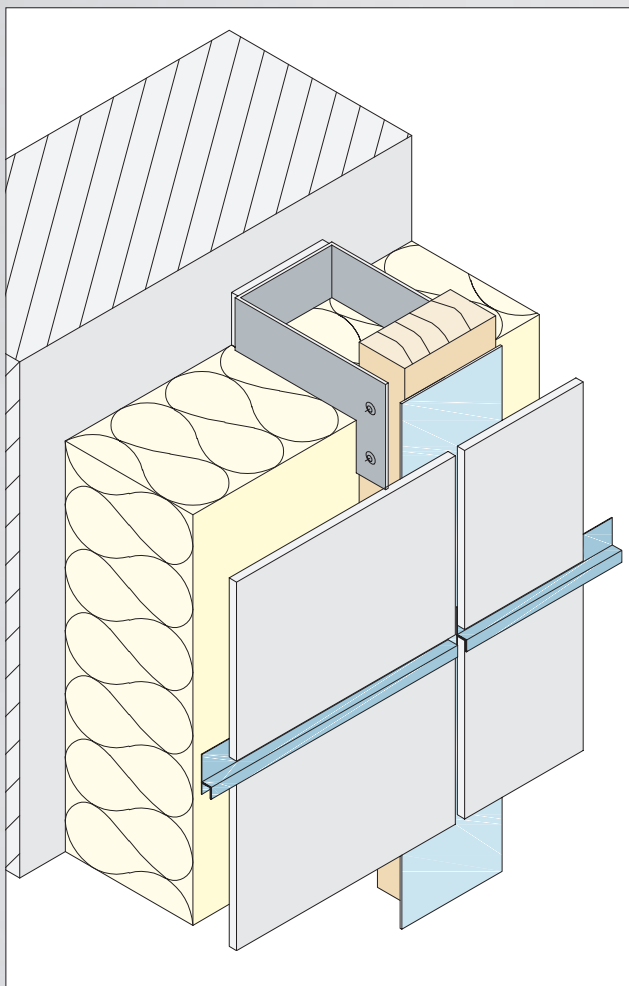

The joint profiles or h-profiles made of aluminium or PVC are used for horizontal joints. They reduce the penetration of moisture. Please ensure that the boards are not placed directly on the profile but that a joint of approx. 5 to 10 mm remains as indicated by the facade cladding manufacturer.

For the horizontal joint profiles, keep in mind that the profiles expand due to fluctuations in temperature. To stop the profiles from moving, they must be fastened with one fixed point, e. g. in the middle of the profile. If conditions require multiple fastening points on a profile, the other fastenings must be sliding points. Do not constrain the profiles and ensure that there is room for expansion.

The facade profiles should generally be shortened to the length or width of the installed board sizes. PVC joint profiles can only be used in white and for small facade boards. Please consult the product literature and the general notes on the installation of facade profiles.

JOINT PROFILES

JOINT PROFILES HORIZONTAL


Joint-h-profile horizontal Alu black

Joint h-profile for facade cladding of up to 4.6 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9047	Aluminum	250	101214	90 - black	20 PCS / 35 BUN

SALE




Joint-h-profile horizontal Alu

Joint h-profile for facade cladding of up to 7 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9061	Aluminum	250	101595	NA - natur	20 PCS / 100 BUN
9048	Aluminum	250	101227	90 - black	20 PCS / 100 BUN




Joint-h-profile horizontal Alu

Joint h-profile for facade cladding of up to 9 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9062	Aluminum	250	101601	NA - natur	20 PCS / 100 BUN
9049	Aluminum	250	101233	90 - black	20 PCS / 100 BUN




Joint profile horizontal Alu

Joint profile for facade cladding up to 8 mm.

Processing instructions:
Install horizontally only!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9092	Aluminum	250	101660	NA - natur	20 PCS / 100 BUN




Joint-h-profile horizontal Alu EV1

Joint h-profile for facade cladding of up to 7 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9086	Aluminum	250	102462	E6 - E6	10 PCS / 200 BUN



JOINT PROFILES

JOINT PROFILES HORIZONTAL


Joint-h-profile horizontal Alu EV1

Joint h-profile for facade cladding of up to 8.8 mm.

Processing instructions:
Only suitable for horizontal installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9087	Aluminum	250	102469	E6 - E6	10 PCS / 200 BUN




Joint-h-profile horizontal Alu EV1

Joint h-profile for facade cladding of up to 11 mm.

Processing instructions:
Only suitable for horizontal installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9088	Aluminum	250	110860	E6 - E6	10 PCS / 140 BUN




Joint-h-profile horizontal Alu EV1

Joint h-profile for facade cladding of up to 12.8 mm.

Processing instructions:
Only suitable for horizontal installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9089	Aluminum	250	102475	E6 - E6	10 PCS / 200 BUN




Joint-h-profile horizontal PVC

Joint h-profile for facade cladding of up to 6.5 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3534	Hard PVC	250	100364	10 - white	20 PCS / 98 BUN




Joint-h-profile horizontal PVC

Joint h-profile for facade cladding of up to 8.5 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3535	Hard PVC	250	100372	10 - white	20 PCS / 91 BUN



JOINT PROFILES


JOINT PROFILES HORIZONTAL

Joint-h-profile horizontal PVC

Joint h-profile for facade cladding of up to 10.5 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3536	Hard PVC	250	100381	10 - white	20 PCS / 65 BUN




Joint-h-profile horizontal PVC

Joint h-profile for facade cladding of up to 10.5 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3537	Hard PVC	250	100394	10 - white	20 PCS / 84 BUN




Joint-Z-profil horizontal PVC

Joint Z-profile for facade cladding of up to 23.5 mm.

Processing instructions:
Only suitable for horizontal installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3554	Hard PVC	250	100590	90 - black	20 PCS / 110 BUN


SALE



FACADE PROFILES JOINT STRUCTURE
JOINT PROFILES ONLY VERTICAL



INSTRUCTIONS FOR APPLICATION

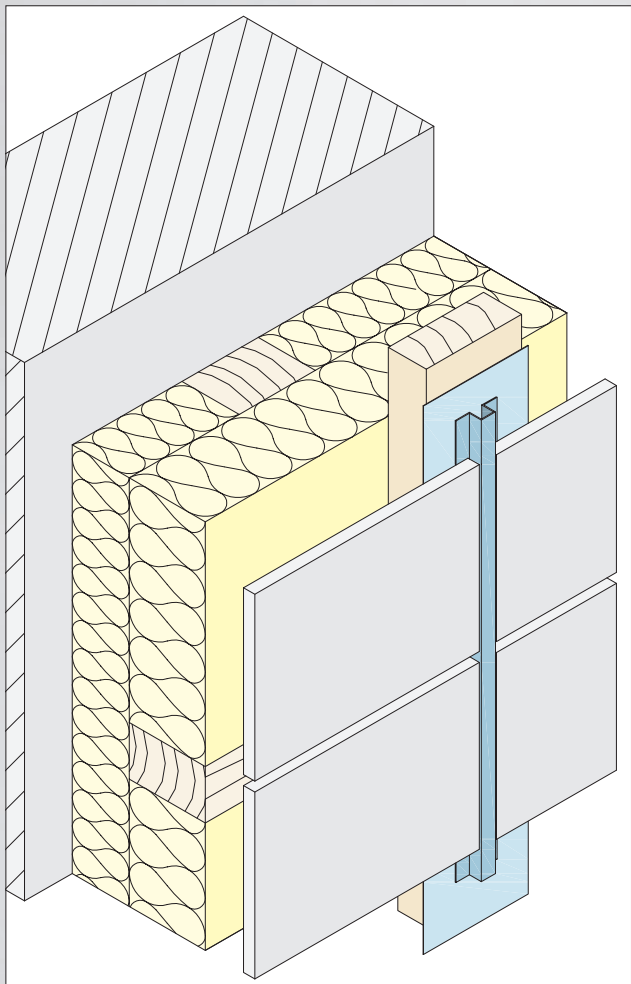

The joint profiles made of aluminium or PVC are used for vertical joints. Ensure that the facade cladding has room for expansion depending on the particular application. The aluminium joint profiles and top hat profiles can be installed on the front or the rearside of the facade cladding.

JOINT PROFILES

JOINT PROFILES VERTICAL


Joint profile vertical hat Alu

Hat profile for facade cladding of 12.5 mm.

Processing instructions:
Only for vertical installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9311	Aluminum	250	101694	NA - natur	20 PCS / 100 BUN




Joint profile vertical Alu

Joint/pilaster strip profile for facade cladding of 20 mm.

Processing instructions:
Only for vertical installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9027	Aluminum	250	109730	NA - natur	10 PCS / 48 BUN




Joint-H-profile vertical Alu EV1

Joint h-profile for facade cladding of up to 6.5 mm.

Processing instructions:
Only for vertical installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9736	Aluminum	300	110375	E6 - E6	10 PCS / 130 BUN




Joint-H-profile vertical Alu EV1

Joint H-profile for facade cladding of up to 8.5 mm.

Processing instructions:
Only for vertical installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9738	Aluminum	300	110376	E6 - E6	10 PCS / 130 BUN




Joint-H-profile vertical PVC

Joint H-profile for facade cladding of up to 6.5 mm.

Processing instructions:
Only for vertical installation!

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3557	Hard PVC	250	100621	47 - brown	20 PCS / 100 BUN
	Hard PVC	250	100618	10 - white	20 PCS / 100 BUN
	Hard PVC	250	100622	90 - black	20 PCS / 100 BUN



JOINT PROFILES


JOINT PROFILES VERTICAL

Joint-H-profile vertical PVC

Joint H-profile for facade cladding of up to 6.5 mm.

Processing instructions:
Only for vertical installation!

Notes:
Greater cover width and greater movement absorption.




SALE
SALE

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3558	Hard PVC	250	112411	10 - white	20 PCS / 75 BUN
	Hard PVC	250	112413	90 - black	20 PCS / 75 BUN

Joint-H-profile vertical PVC

Joint H-profile for facade cladding of up to 8.5 mm.

Processing instructions:
Only for vertical installation!




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3546	Hard PVC	250	100504	90 - black	20 PCS / 81 BUN
	Hard PVC	250	100499	10 - white	20 PCS / 81 BUN

Joint-H-profile vertical PVC

Joint H-profile for facade cladding of up to 10.5 mm.

Processing instructions:
Only for vertical installation!




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3547	Hard PVC	250	100512	10 - white	20 PCS / 90 BUN
	Hard PVC	250	100517	90 - black	20 PCS / 90 BUN

Joint-H-profile vertical PVC

Joint H-profile for facade cladding of up to 12.5 mm.


Processing instructions:
Only for vertical installation!



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3548	Hard PVC	250	100526	10 - white	20 PCS / 64 BUN



INSTRUCTIONS FOR APPLICATION

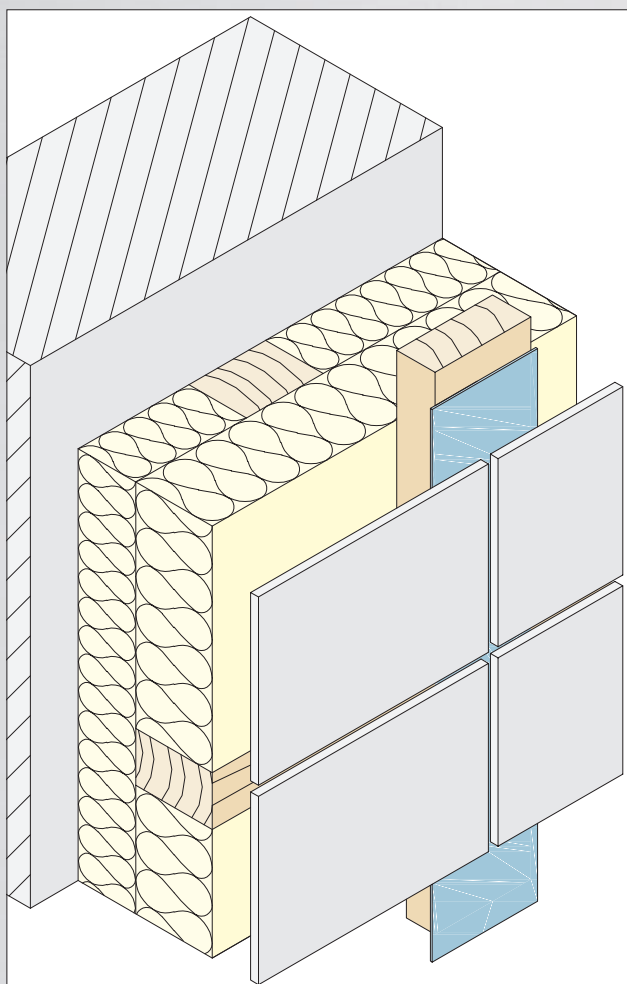

The joint tapes can be used for vertical joints and have different functions.

Joint tapes decouple the facade cladding and reduce noise transmission. They furthermore reduce water penetration and protect the substructure as well as the insulation from penetrating water.

For wooden substructures, the joint tape must overlap at least 5 mm on each side of the substructure.

PROTEKTOR joint tapes are made from aging- resistant and weather-resistant EPDM or soft PVC. The EPDM joint tapes significantly exceed the requirements of DIN 18516 Part 1 regarding temperature fluctuations and temperature limitations. Installation of the substructure is facilitated by the EPDM joint tapes with an adhesive foil, which is applied on site. Note: The adhesive foil increases the material thickness by approx. 0.2 mm.

PROTEKTOR recommends using joint tapes on wooden and aluminium substructures.

JOINT TAPES


JOINT TAPES EPDM

Joint tape EPDM black

EPDM joint tape for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 1,2 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3316	EPDM	2,500	115544	90 - black	80	3 ROL / 60 BOX
3317	EPDM	2,500	115543	90 - black	120	2 ROL / 60 BOX




Joint tape EPDM black

EPDM joint tape for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 0,8 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3310	EPDM	2,500	108446	90 - black	70	3 ROL / 60 BOX
3311	EPDM	2,500	108447	90 - black	110	2 ROL / 60 BOX
3314	EPDM	2,500	110284	90 - black	130	2 ROL / 60 BOX




Joint tape EPDM self-adhesive black

Self-adhesive EPDM joint tape for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 0,8 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3312	EPDM sk	2,500	109790	90 - black	70	3 ROL / 60 BOX
3313	EPDM sk	2,500	109791	90 - black	110	2 ROL / 60 BOX
3315	EPDM sk	2,500	110285	90 - black	130	2 ROL / 60 BOX




JOINT TAPES
JOINT TAPES PVC

Joint tape with sealing lip PVC

Joint tape made of flexible PVC with sealing lip for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 1,2 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3332	Soft PVC	2,500	100177	90 - black	36	2 ROL / 100 BOX




Joint tape with sealing lip PVC

Joint tape made of flexible PVC with sealing lip for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 1,2 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3333	Soft PVC	2,500	100181	90 - black	60	2 ROL / 48 BOX
	Soft PVC	2,500	100178	10 - white	60	2 ROL / 48 BOX




Joint tape with sealing lip PVC

Joint tape made of flexible PVC with sealing lip for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 1,2 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3334	Soft PVC	2,500	100185	90 - black	100	1 ROL / 48 BOX




Joint tape with sealing lip PVC

Joint tape made of flexible PVC with a larger sealing lip for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 1,2 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3331	Weich-PVC	2,500	100173	90 - black	36	2 ROL / 100 BOX




Joint tape with sealing lip PVC

Joint tape made of flexible PVC with sealing lip for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 1,2 mm

Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3327	Soft PVC	2,500	100156	90 - black	60	1 ROL / 100 BOX




JOINT TAPES

JOINT TAPES PVC

Joint tape PVC

Joint tape made of flexible PVC for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Material thickness: 0,7 mm



Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3336	Soft PVC	5,000	100193	90 - black	110	1 ROL / 48 BOX


SALE

Joint tape PVC

Joint tape made of flexible PVC for protecting sub-constructions.

Processing instructions:
Install tension-free.
No overpainting possible.
Notes: Install tension-free.

No overpainting possible.
Material thickness: 0,5 mm
Notes:
Limited use! Not suitable for strong sunlight and high loads due to the thickness of the material.



Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
3326	Soft PVC	5,000	100148	10 - white	36	2 ROL / 100 BOX
3325	Soft PVC	5,000	100144	10 - white	60	2 ROL / 48 BOX
	Soft PVC	5,000	100147	90 - black	60	2 ROL / 48 BOX
3335	Soft PVC	5,000	100189	90 - black	80	1 ROL / 100 BOX
3322	Soft PVC	5,000	100135	90 - black	100	1 ROL / 100 BOX

SALE


ANGLE PROFILES

Angle profile Alu

Angle profile 35 x 35 x 0.7 mm for various applications.

Material thickness (mm): 0,7 mm

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
9435	Aluminum	250	108215	35x35x0.7 mm	90 - black	20 PCS / 65 BUN




Angle profile Alu

Angle profile 50 x 50 x 0.8 mm for various applications.

Material thickness (mm): 0,8 mm

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
9436	Aluminum	250	108216	50x50x0.8 mm	NA - natur	20 PCS / 65 BUN
9437	Aluminum	250	108208	50x50x0.8 mm	90 - black	20 PCS / 65 BUN



Angle profile

Can be used universally.

Material: Galvanised steel


Material thickness (mm): 0,6 mm

Norm: EN 14195:2005

Notes:

Further angle measurements available on request.

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
5161	Galvanised steel	300	106601	28 x 28 mm		20 PCS / 50 BUN
5162	Galvanised steel	400	100654	41 x 41 mm		20 PCS / 50 BUN



Angle profile

Can be used universally.

Material: Galvanised steel


Material thickness (mm): 0,7 mm

Norm: EN 14195:2005

Notes:

Further angle measurements available on request.

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
5186	Galvanised steel	300	110249	30 x 50 mm		20 PCS / 50 BUN



Angle profile

Can be used universally.

Material: Galvanised steel


Material thickness (mm): 1 mm

Norm: EN 14195:2005

Notes:

Further angle measurements available on request.

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
5189	Galvanised steel	300	110251	30 x 30 mm		10 PCS / 50 BUN
5165	Galvanised steel	300	100663	40 x 20 mm		8 PCS / 60 BUN
5177	Galvanised steel	300	100723	40 x 40 mm		10 PCS / 50 BUN




ANGLE PROFILES

Angle profile PVC

15 x 20 x 1.5 mm angle profile for various applications. **Material thickness (mm):** 1,5 mm


Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3578	Hard PVC	250	100805	15x20x1.5 mm	10 - white	20 PCS / 230 BUN
	Hard PVC	250	100810	15x20x1.5 mm	90 - black	20 PCS / 230 BUN



Angle profile PVC

25 x 25 x 2.0 mm angle profile for various applications. **Material thickness (mm):** 2 mm


Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3520	Hard PVC	250	100302	25x25x2.0 mm	90 - black	20 PCS / 135 BUN
	Hard PVC	250	100298	25x25x2.0 mm	10 - white	20 PCS / 135 BUN



Angle profile PVC

30 x 30 x 2.5 mm angle profile for various applications. **Material thickness (mm):** 2,5 mm


Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3524	Hard PVC	250	100308	30x30x2.5 mm	10 - white	20 PCS / 84 BUN
	Hard PVC	250	100309	30x30x2.5 mm	33 - brick-red	20 PCS / 84 BUN
	Hard PVC	250	100310	30x30x2.5 mm	47 - brown	20 PCS / 84 BUN
	Hard PVC	250	100311	30x30x2.5 mm	90 - black	20 PCS / 84 BUN



Angle profile PVC

35 x 35 x 2.5 mm angle profile for various applications. **Material thickness (mm):** 2,5 mm


Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3519	Hard PVC	250	100291	35x35x2.5 mm	90 - black	20 PCS / 84 BUN
	Hard PVC	250	100288	35x35x2.5 mm	10 - white	20 PCS / 84 BUN



Angle profile PVC

35 x 35 x 1.5 mm angle profile for various applications. **Material thickness (mm):** 1,5 mm

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3528	Hard PVC	250	100336	35x35x1.5 mm	10 - white	20 PCS / 99 BUN
	Hard PVC	250	100339	35x35x1.5 mm	90 - black	20 PCS / 99 BUN




ANGLE PROFILES

Angle profile PVC

30 x 60 x 2.0 mm angle profile for various applications.

Material thickness (mm): 2 mm

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3525	Hard PVC	250	100316	30x60x2.0 mm	10 - white	10 PCS / 97 BUN
	Hard PVC	250	100319	30x60x2.0 mm	90 - black	10 PCS / 97 BUN
	Hard PVC	250	100318	30x60x2.0 mm	47 - brown	10 PCS / 97 BUN




Angle profile PVC

30 x 90 x 2.5 mm angle profile for various applications.

Material thickness (mm): 2,5 mm

SALE

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3518	Hard PVC	250	100283	30x90x2.5 mm	90 - black	10 PCS / 59 BUN
	Hard PVC	250	100282	30x90x2.5 mm	47 - brown	10 PCS / 59 BUN
	Hard PVC	250	100280	30x90x2.5 mm	10 - white	10 PCS / 59 BUN




Angle profile PVC

65 x 65 x 1.5 mm angle profile for various applications.

Material thickness (mm): 1,5 mm

Item number	Material	Length (cm)	Order number	Description	Color	Package/ Large pack
3540	Hard PVC	250	100445	65x65x1,5 mm	90 - black	10 PCS / 75 BUN
	Hard PVC	250	100441	65x65x1,5 mm	10 - white	10 PCS / 75 BUN






PROTEKTOR OMEGA-PROFILE – THE PERFECT CLIMATE FOR EVERY FACADE



The PROTEKTOR Omega ventilation profile (Art.-Nr. 9363) is a hat profile made of aluminium with ventilation holes. The height of the profile is 30 mm; the base is 60 mm wide. Ventilation holes with a diameter of 5 mm are placed along the profile. The free ventilation cross-section at the 30 mm leg is 75 cm²/running metre. The material thickness is 1 mm. The Protektor Omega ventilation profile is versatile.

NOTE: The Omega ventilation profile is not included in the building regulations list and has not been tested by DIBt for approval. The suitability of the Omega ventilation profile for the object must therefore be clarified on site in advance, in the planning phase or before installation.

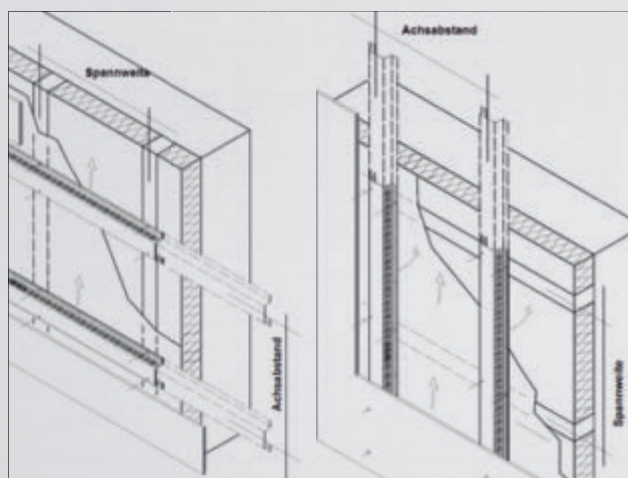


Product infos
View now »

Omega-ventilation profile Alu

Hat profile with ventilation holes.

Material thickness: 1 mm
Product width: 60/110 mm
Height (b): 30 mm
Ventilation area: 75 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9363	Aluminum	300	111479	NA - natur	10 PCS / 42 BUN



GENERAL INFORMATION ABOUT ROOF AND FACADE VENTILATION

Ventilation profiles have the task of ensuring the greatest possible ventilation and the removal of moisture from the roof or the ventilated curtain wall and to achieve the best possible protection for small animals and insects at the same time.

According to DIN 4108 Part 3 a minimum ventilation cross section of $200 \text{ cm}^2/\text{metre}$ is required for an adequate roof ventilation for roof lengths up to 10 m.

According to DIN 18516 Part 1 the minimum cross section for the ventilation profile must be $50 \text{ cm}^2/\text{metre}$ and at least $200 \text{ cm}^2/\text{metre}$ for the rear ventilated area.

According to DIN 18516 Part 1, the openings in the base area for rear-ventilation of the exterior wall must be secured by ventilation grilles across a width of at least 20 mm.

The offset square perforation of the PROTEKTOR ventilation grilles ensures the highest possible percentage of holes. This improves ventilation up to approx. 20 % compared to most round or oval perforations.



Optimal and effective ventilation and moisture transportation by means of diffusion or condensation is therefore safer in the roof or the rear-ventilated curtain wall. At the same time, this blocks the access of unwanted small animals to the ventilation level.

Please pay particular attention to the minimum ventilation cross-sections when selecting ventilation profiles. See the respective profile information for the ventilation cross-sections requirements. .



Ventilation profiles made of aluminium or PVC must be installed without constraint. It is therefore recommended that the profile is centred for fastening in the ventilation holes.

PROTEKTOR indicates the free ventilation cross sections in cm^2/m as appropriate standards also indicate the required ventilation cross sections in cm^2/m . This simplifies selection of the right profiles,




ROOF VENTILATION

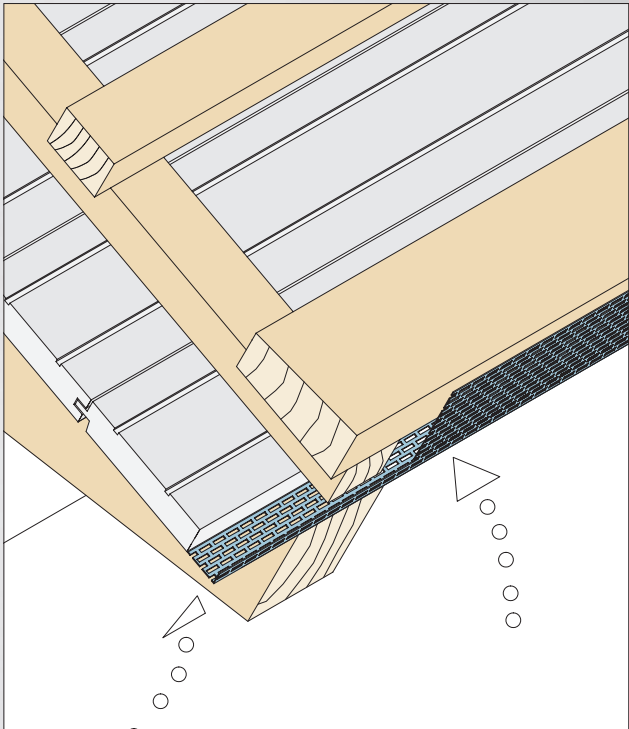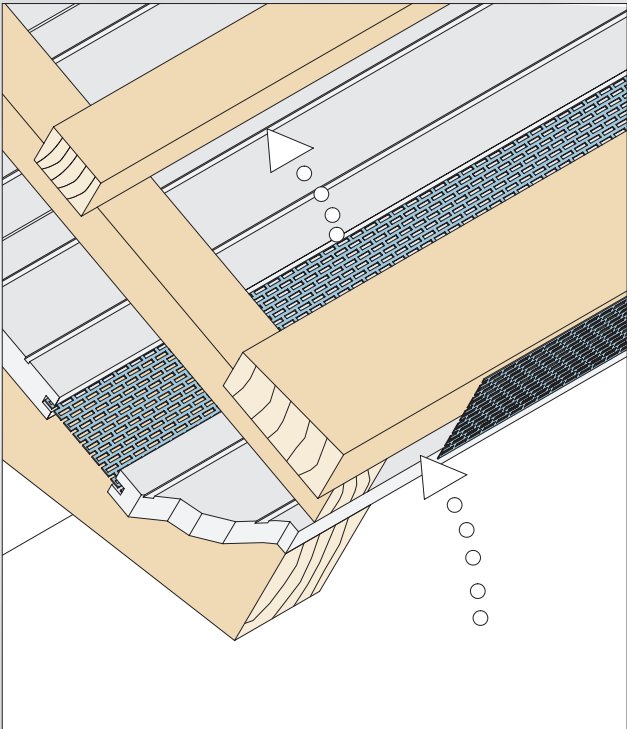




SOCKET FORMATION

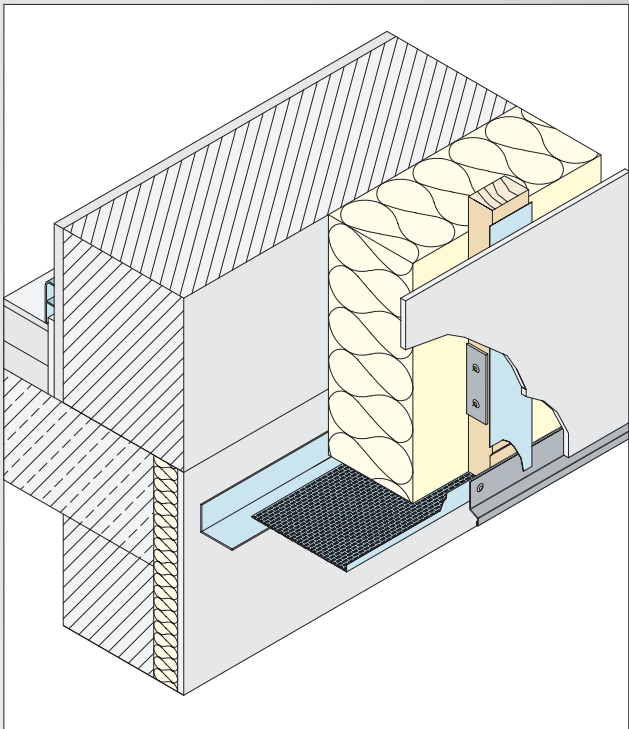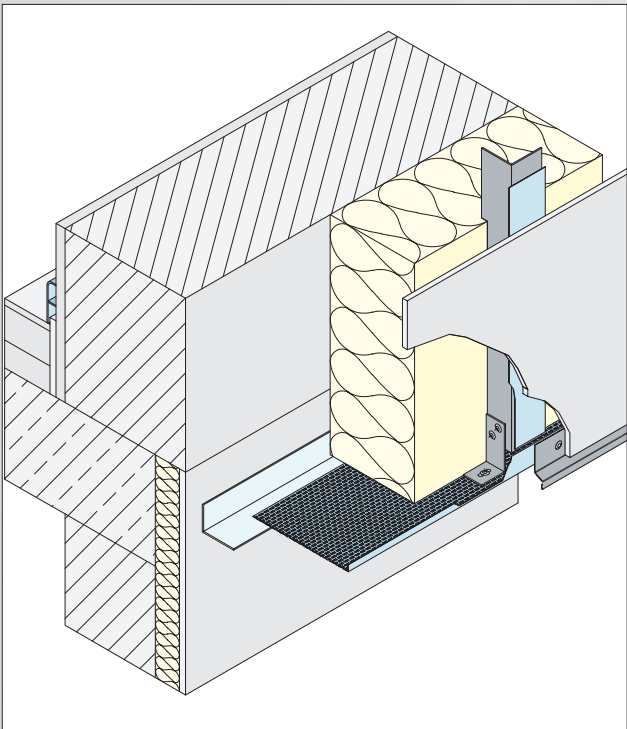




FACADE CONNECTION

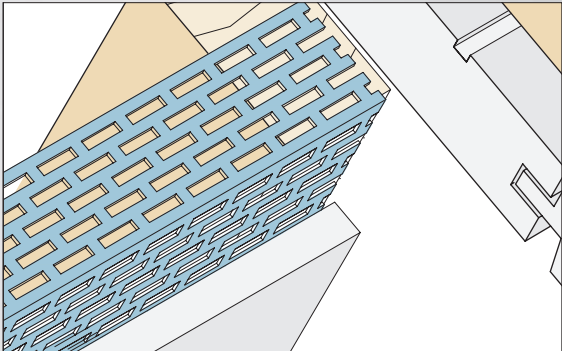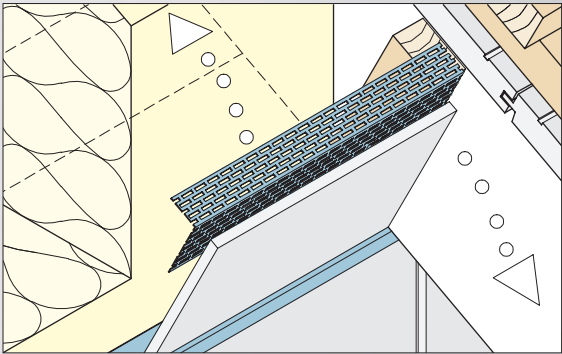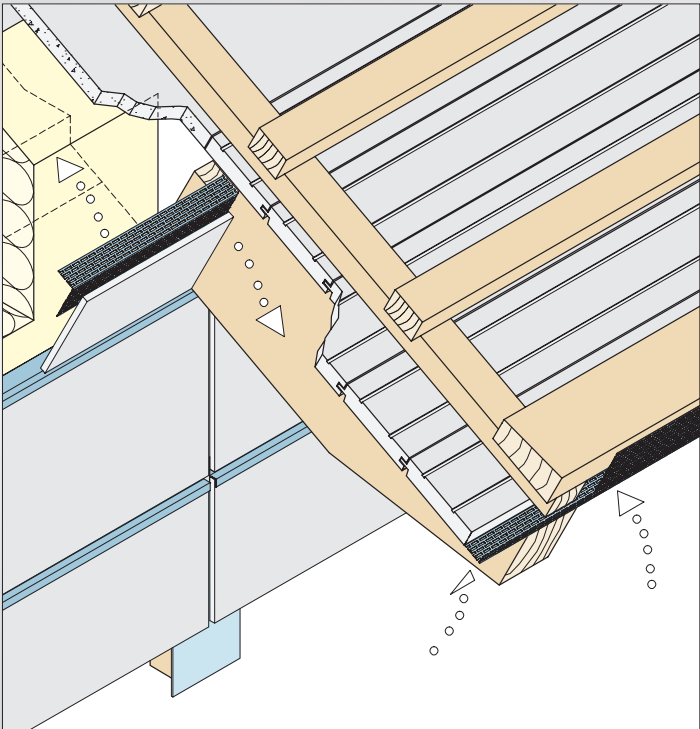




FACADE CONNECTION

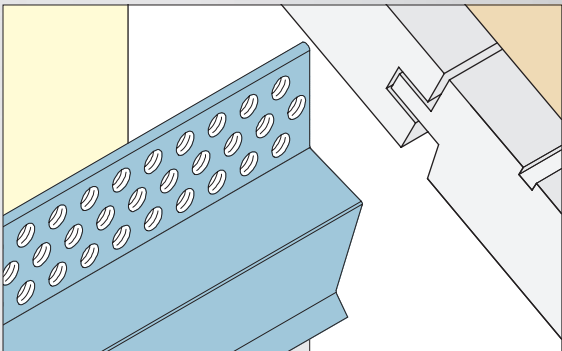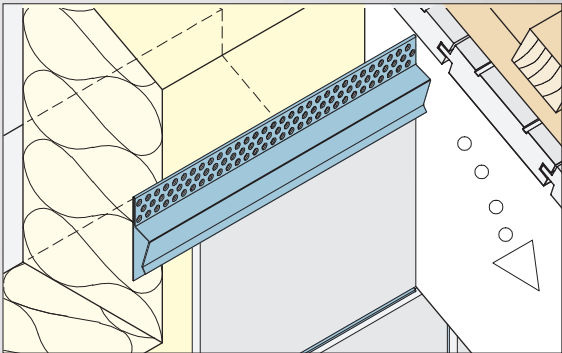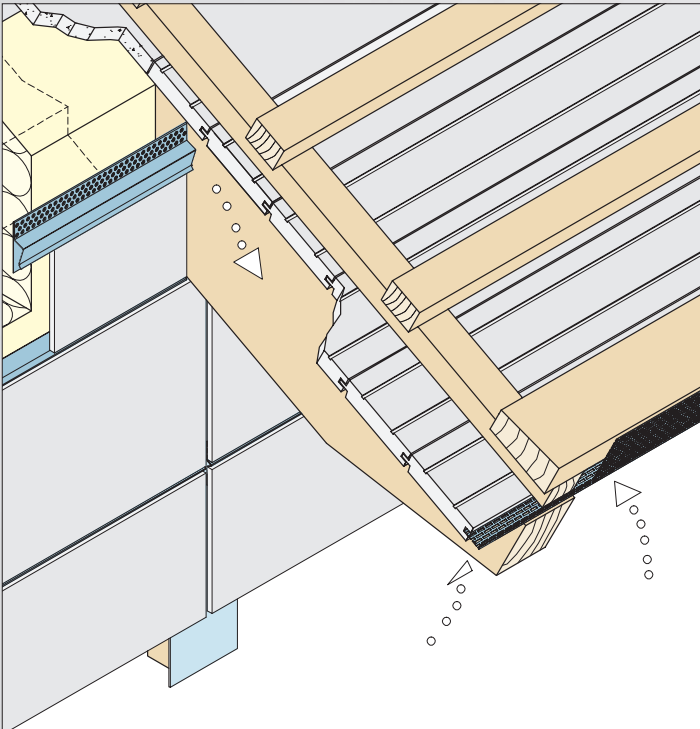


BASE FORMATION

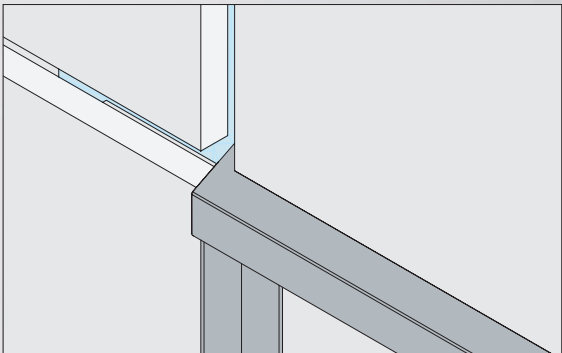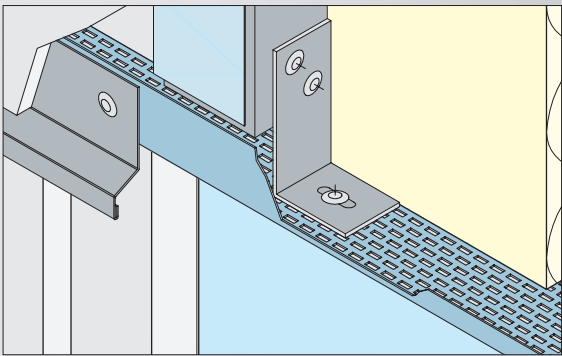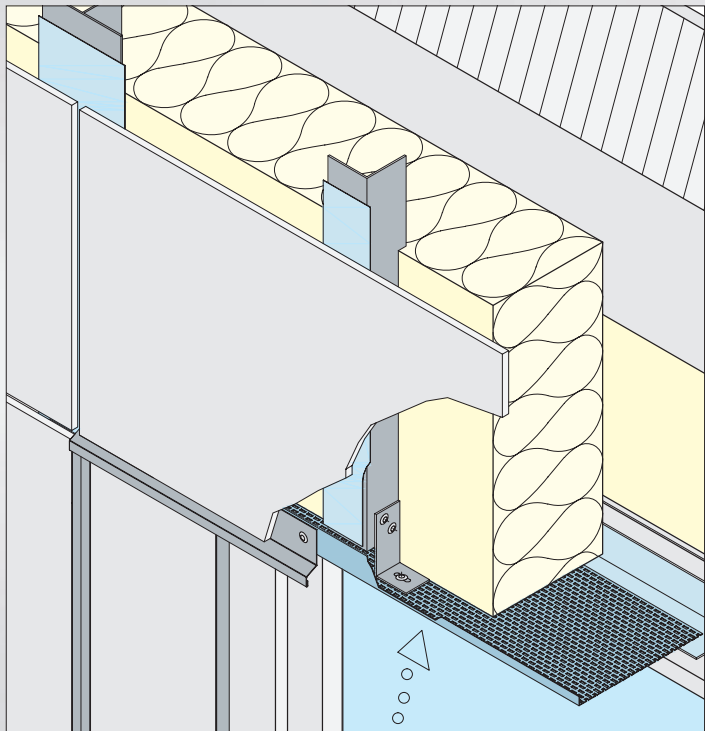

WINDOWSILL CONNECTION

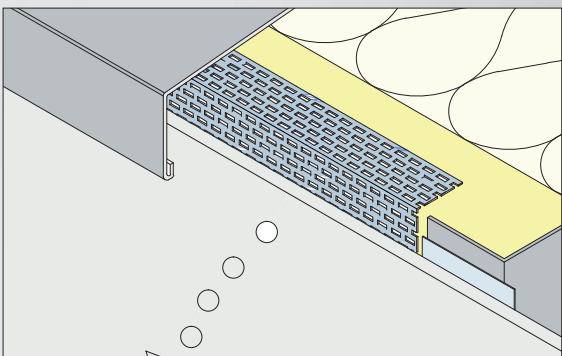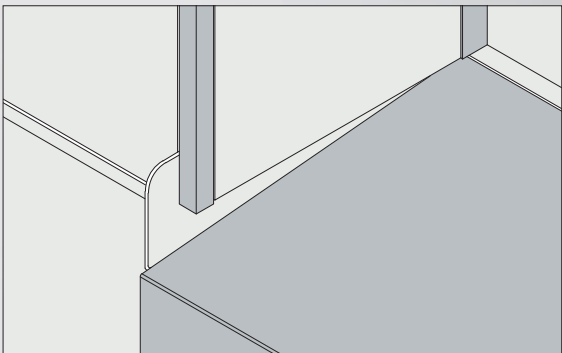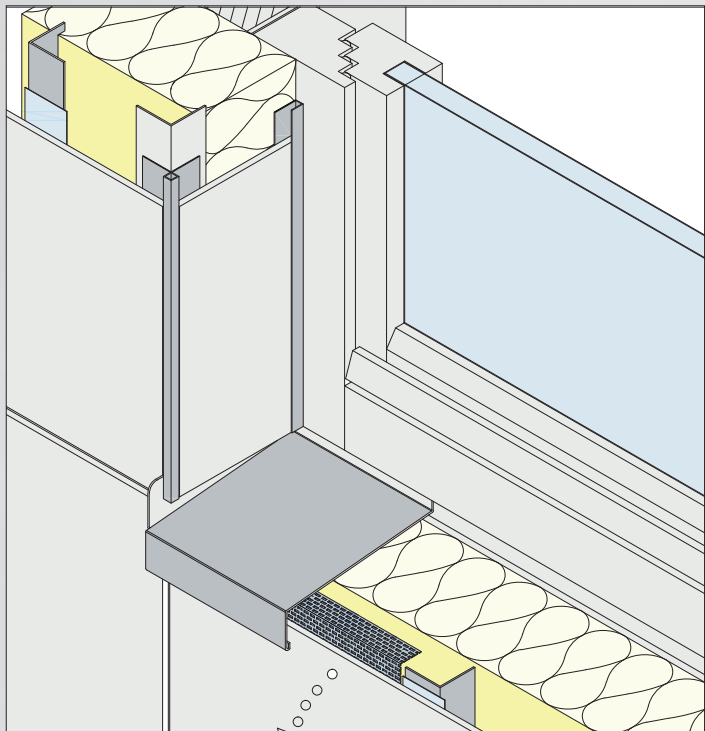

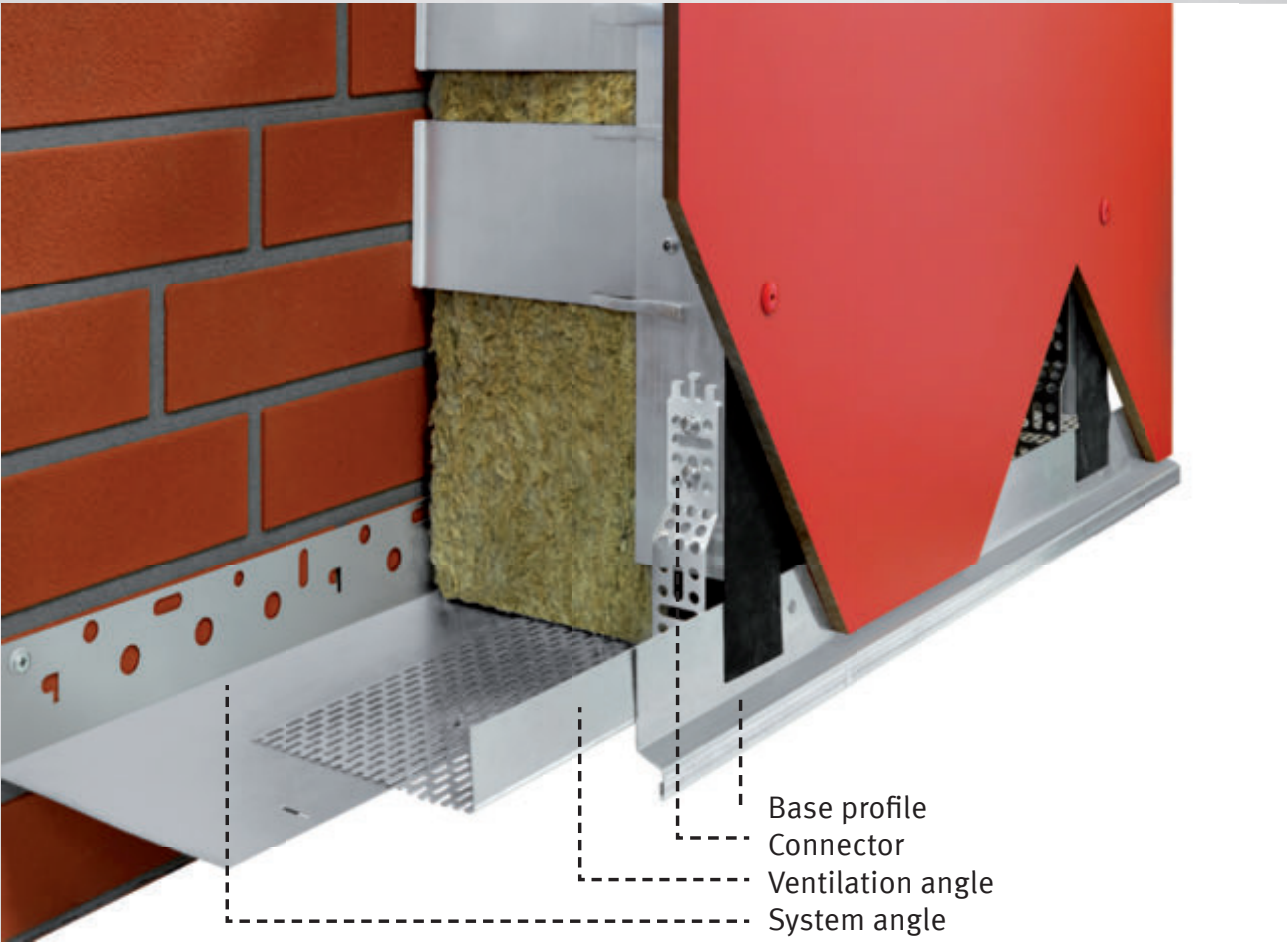


PROTEKTOR VENTILATION SYSTEM – THE PERFECT CLIMATE FOR EVERY FACADE



The new Protektor Ventilation System for rear-ventilated curtain facades is easy to use and provides long-lasting quality. It is the very first ventilation system that utilises a connector to ensure tension-free installation that conforms to the DIN norms. Another advantage is the continuous width adjustability offered by this system. Various widths can be achieved using just two profiles, the system and the ventilation angle. The angles can simply be connected using rivets, without the need for prior drilling. The connector prevents the substructure from warping and eliminates the onset of damage.


These are the advantages of the PROTEKTOR Ventilation System:

- Ensures tension-free installation using a connector
- Conforms to DIN 18516-1, 4.3, rear-ventilated exterior wall cladding
- Expansion allowance of the ventilation angle with respect to the substructure
- Substructure does not warp
- Eliminates the onset of damage
- System and ventilation angle allow for continuous adjustment
- Various widths can be achieved using just two profiles
- Convenient riveting of ventilation and system angle without the need for pre-drilling
- Ideal for creating base profiles, door and window lintels

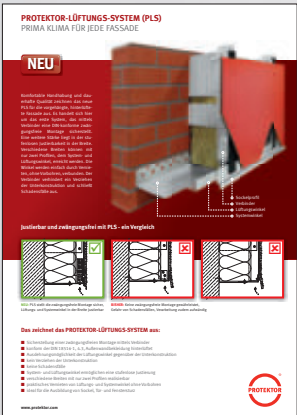

VENTILATION PROFILES

COMPARISON

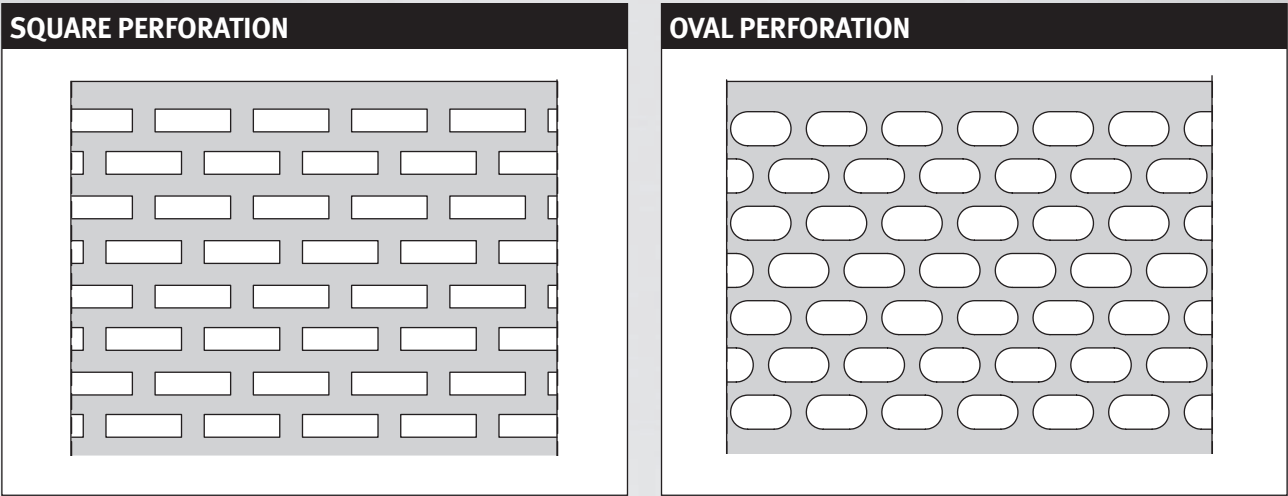

Hole geometry	PVC Strip	3 x 6 mm	PVC Strip	4,5 x 8 mm
	PVC Angles	3 x 6 mm	PVC Angles	4,5 x 8 mm
	Alu Strip	3 x 10 mm	Alu Strip	4,5 x 8 mm
	Alu Angles	3 x 10 mm	Alu Angles	3,6 x 7,2 mm
Small animal protection	Yes		Yes	
Insect protection	Yes, up to small insects		Yes, up to medium insects	
Design	Holes expand lengthwise		Holes expand widthwise	

Examples of free ventilation cross sections

PVC-Ventilation strip 80 mm	426 cm²/lfm	378 cm²/lfm
Alu-Ventilation strip 80 mm	300 cm²/lfm	378 cm²/lfm
PVC-Ventilation angle 30 x 50 mm	246 cm²/lfm	220 cm²/lfm
	Perforated on one side	Perforated on one side
Alu-Ventilation angle 30 x 50 mm	92/185 cm²/lfm	126/252 cm²/lfm
	Perforated on both sides	Perforated on both sides
PVC-Ventilation angle 30 x 90 mm	470 cm²/lfm	410 cm²/lfm
	Perforated on one side	Perforated on one side
Alu-Ventilation angle 30 x 90 mm	346 cm²/lfm	126/441 cm²/lfm
	Perforated on both sides	Perforated on both sides

PROTEKTOR VENTILATION SYSTEM (PLS)

Connector Alu


Connector for the PROTEKTOR ventilation system (PLS).



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9471	Aluminum	11	109533	NA - natur	50 PCE / 999 BOX

System angle Alu

System angle 48 x 140 mm for the PROTEKTOR ventilation system (PLS).



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9472	Aluminum	250	109529	NA - natur	10 PCS / 30 BUN


Ventilation angle one-sided square perforation Alu

Ventilation angle 30 x 120 mm with single-sided square perforation.

Ventilation area: 462 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9334	Aluminum	250	107031	NA - natur	10 PCS / 83 BUN
9335	Aluminum	250	107034	90 - black	10 PCS / 83 BUN




Socle profile-Z Alu

Wall base z-profile for covering facade cladding of up to 11.5 mm.



Item number	Material	Length (cm)	Order number	Color	Dimension a (mm)	Package/ Large pack
9083	Aluminum	250	101622	NA - natur	11,5 mm	10 PCS / 140 BUN



VENTILATION PROFILES

VENTILATION STRIP WITH SQUARE PERFORATION


Ventilation angle double-sided square perforation Alu

Ventilation angle 30 x 30 mm
with double-sided square perforation.

Ventilation area: 92/92 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9309	Aluminum	250	112034	NA - natur	20 PCS / 198 BUN




Ventilation angle double-sided square perforation Alu

Ventilation angle 30 x 40 mm
with double-sided square perforation.

Ventilation area: 92/139 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9301	Aluminum	250	101677	NA - natur	20 PCS / 168 BUN
9300	Aluminum	250	101674	90 - black	20 PCS / 168 BUN




Ventilation angle double-sided square perforation Alu

Ventilation angle 30 x 50 mm
with double-sided square perforation.

Ventilation area: 92/185 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9071	Aluminum	250	112035	NA - natur	20 PCS / 144 BUN
9043	Aluminum	250	101193	90 - black	20 PCS / 144 BUN




Ventilation angle one-sided square perforation Alu

Ventilation angle 30 x 60 mm
with single-sided square perforation.

Ventilation area: 208 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9330	Aluminum	250	107029	NA - natur	10 PCS / 165 BUN
9331	Aluminum	250	107032	90 - black	10 PCS / 165 BUN




Ventilation angle one-sided square perforation Alu

Ventilation angle 30 x 70 mm
with single-sided square perforation.

Ventilation area: 254 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9072	Aluminum	250	112036	NA - natur	20 PCS / 108 BUN
9044	Aluminum	250	101197	90 - black	20 PCS / 108 BUN



VENTILATION PROFILES

VENTILATION STRIP WITH SQUARE PERFORATION


Ventilation angle one-sided square perforation Alu

Ventilation angle 30 x 90 mm
with single-sided square perforation.

Ventilation area: 346 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9306	Aluminum	250	112037	NA - natur	20 PCS / 84 BUN




Ventilation angle one-sided square perforation Alu

Ventilation angle 30 x 100 mm
with single-sided square perforation.

Ventilation area: 393 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9332	Aluminum	250	107030	NA - natur	10 PCS / 100 BUN
9333	Aluminum	250	107033	90 - black	10 PCS / 100 BUN




Ventilation angle one-sided square perforation Alu

Ventilation angle 30 x 120 mm
with single-sided square perforation.

Ventilation area: 462 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9334	Aluminum	250	107031	NA - natur	10 PCS / 83 BUN
9335	Aluminum	250	107034	90 - black	10 PCS / 83 BUN




Ventilation angle double-sided square perforation Alu

Ventilation angle 50 x 50 mm
with double-sided square perforation.

Ventilation area: 185/185 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9073	Aluminum	250	101611	NA - natur	20 PCS / 99 BUN
9046	Aluminum	250	101204	90 - black	20 PCS / 80 BUN




Ventilation angle double-sided square perforation Alu

Ventilation angle 50 x 70 mm
with double-sided square perforation.

Ventilation area: 185/255 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9302	Aluminum	250	101680	NA - natur	20 PCS / 72 BUN
9303	Aluminum	250	101681	90 - black	20 PCS / 72 BUN



VENTILATION PROFILES

VENTILATION STRIP WITH SQUARE PERFORATION


Ventilation angle one-sided square perforation Alu

Ventilation angle 10 x 50 mm
with single-sided square perforation.

Ventilation area: 185 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9312	Aluminum	250	103539	NA - natur	20 PCS / 163 BUN




Ventilation angle one-sided square perforation Alu

Ventilation angle 10 x 70 mm
with single-sided square perforation.

Ventilation area: 254 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9313	Aluminum	250	103538	NA - natur	20 PCS / 180 BUN




Ventilation angle one-sided square perforation Alu

Ventilation angle 10 x 90 mm
with single-sided square perforation.

Ventilation area: 346 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9314	Aluminum	250	103537	NA - natur	20 PCS / 147 BUN




Ventilation angle one-sided square perforation PVC

Ventilation angle 25 x 25 mm
with single-sided square perforation.

Ventilation area: 112 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3614	Hard PVC	250	101105	47 - brown	20 PCS / 160 BUN
	Hard PVC	250	101107	90 - black	20 PCS / 160 BUN
	Hard PVC	250	101098	10 - white	20 PCS / 160 BUN




Ventilation angle one-sided square perforation PVC

Ventilation angle 30 x 30 mm
with single-sided square perforation.

Ventilation area: 134 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3612	Hard PVC	250	112030	90 - black	20 PCS / 140 BUN
	Hard PVC	250	112028	10 - white	20 PCS / 140 BUN
	Hard PVC	250	112029	47 - brown	20 PCS / 140 BUN



VENTILATION PROFILES


VENTILATION STRIP WITH SQUARE PERFORATION

Ventilation angle one-sided square perforation PVC

Ventilation angle 30 x 50 mm
with single-sided square perforation.

Ventilation area: 246 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3610	Hard PVC	250	112026	47 - brown	20 PCS / 80 BUN
	Hard PVC	250	112025	10 - white	20 PCS / 80 BUN
	Hard PVC	250	112027	90 - black	20 PCS / 80 BUN
	Hard PVC	250	101030	33 - brick-red	20 PCS / 80 BUN




Ventilation angle one-sided square perforation PVC

Ventilation angle 30 x 60 mm
with single-sided square perforation.

Ventilation area: 291 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3611	Hard PVC	250	101050	90 - black	10 PCS / 120 BUN
	Hard PVC	250	101048	47 - brown	10 PCS / 120 BUN
	Hard PVC	250	101046	33 - brick-red	10 PCS / 120 BUN
	Hard PVC	250	101043	10 - white	10 PCS / 120 BUN




Ventilation angle one-sided square perforation PVC

Ventilation angle 30 x 70 mm
with single-sided square perforation.

Ventilation area: 358 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3613	Hard PVC	250	112031	10 - white	10 PCS / 117 BUN
	Hard PVC	250	101083	33 - brick-red	10 PCS / 117 BUN
	Hard PVC	250	112033	90 - black	10 PCS / 117 BUN
	Hard PVC	250	112032	47 - brown	10 PCS / 117 BUN




Ventilation angle one-sided square perforation PVC

Ventilation angle 30 x 90 mm
with single-sided square perforation.

Ventilation area: 470 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3617	Hard PVC	250	101122	33 - brick-red	10 PCS / 77 BUN
	Hard PVC	250	101127	90 - black	10 PCS / 77 BUN
	Hard PVC	250	101125	47 - brown	10 PCS / 77 BUN
	Hard PVC	250	101119	10 - white	10 PCS / 77 BUN



VENTILATION PROFILES

VENTILATION STRIP WITH SQUARE PERFORATION ALU


Ventilation strip square perforation Alu

50-mm ventilation strip
with square perforations.

Ventilation area: 185 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9320	Aluminum	250	107023	NA - natur	20 PCS / 196 BUN
9321	Aluminum	250	107026	90 - black	20 PCS / 132 BUN




Ventilation strip square perforation Alu

70-mm ventilation strips
with square perforations.

Ventilation area: 254 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9040	Aluminum	250	101184	NA - natur	20 PCS / 140 BUN
9041	Aluminum	250	101188	90 - black	20 PCS / 140 BUN




Ventilation strip square perforation Alu

80-mm ventilation strip
with square perforations.

Ventilation area: 300 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9322	Aluminum	250	107024	NA - natur	20 PCS / 95 BUN
9323	Aluminum	250	107027	90 - black	20 PCS / 119 BUN




Ventilation strip square perforation Alu

100-mm ventilation strips
with square perforations.

Ventilation area: 393 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9324	Aluminum	250	107025	NA - natur	20 PCS / 98 BUN
9325	Aluminum	250	107028	90 - black	20 PCS / 98 BUN




Ventilation strip square perforation Alu

120-mm ventilation strip
with square perforations.

Ventilation area: 462 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9095	Aluminum	250	101670	NA - natur	20 PCS / 84 BUN
9096	Aluminum	250	101671	90 - black	20 PCS / 63 BUN



VENTILATION PROFILES

VENTILATION STRIP WITH SQUARE PERFORATION ALU

Ventilation strip square perforation rolled Alu

50-mm rolled ventilation strips
in a convenient dispenser case.

Ventilation area: 185 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9340	Aluminum	6,000	108736	NA - natur	2 ROL / 46 BOX
9344	Aluminum	6,000	108739	97 - white/brown	2 ROL / 46 BOX
9348	Aluminum	6,000	109167	98 - black/red	2 ROL / 46 BOX



Ventilation strip square perforation rolled Alu

80-mm rolled ventilation
strips in a convenient dispenser.

Ventilation area: 300 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9341	Aluminum	6,000	108737	NA - natur	1 ROL / 46 BOX
9345	Aluminum	6,000	108740	97 - white/brown	1 ROL / 46 BOX
9349	Aluminum	6,000	109168	98 - black/red	1 ROL / 46 BOX



Ventilation strip square perforation rolled Alu

100-mm ventilation strips
in a convenient dispenser case.

Ventilation area: 393 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9342	Aluminum	6,000	108738	NA - natur	1 ROL / 46 BOX
9346	Aluminum	6,000	108741	97 - white/brown	1 ROL / 46 BOX
9350	Aluminum	6,000	109169	98 - black/red	1 ROL / 46 BOX




VENTILATION PROFILES

VENTILATION STRIP SQUARE PERFORATION PVC

Ventilation strip square perforated rolled PVC

50-mm rolled ventilation strips with square perforations. **Ventilation area:** 269 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3686	Hard PVC	500	102036	10 - white	24 ROL / 40 BOX
	Hard PVC	500	102047	47 - brown	24 ROL / 40 BOX
	Hard PVC	500	102051	90 - black	24 ROL / 40 BOX
3677	Hard PVC	6,000	101893	47 - brown	2 ROL / 46 BOX
	Hard PVC	6,000	101861	10 - white	2 ROL / 46 BOX
	Hard PVC	6,000	101895	90 - black	2 ROL / 46 BOX



Ventilation strip square perforated rolled PVC

80-mm rolled ventilation strips with square perforations. **Ventilation area:** 426 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3685	Hard PVC	500	102017	10 - white	12 ROL / 40 BOX
	Hard PVC	500	102033	90 - black	12 ROL / 40 BOX
	Hard PVC	500	102020	33 - brick-red	12 ROL / 40 BOX
	Hard PVC	500	102029	47 - brown	12 ROL / 40 BOX
3678	Hard PVC	6,000	101908	47 - brown	1 ROL / 46 BOX
	Hard PVC	6,000	101896	10 - white	1 ROL / 46 BOX
	Hard PVC	6,000	101911	90 - black	1 ROL / 46 BOX



Ventilation strip square perforation rolled PVC

100-mm rolled ventilation strips with square perforations. **Ventilation area:** 538 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3681	Hard PVC	500	101953	47 - brown	12 ROL / 40 BOX
	Hard PVC	500	101931	10 - white	12 ROL / 40 BOX
	Hard PVC	500	101958	90 - black	12 ROL / 40 BOX
	Hard PVC	500	101940	33 - brick-red	12 ROL / 40 BOX
3679	Hard PVC	6,000	101926	33 - brick-red	1 ROL / 46 BOX
	Hard PVC	6,000	101930	47 - brown	1 ROL / 46 BOX
	Hard PVC	6,000	101916	10 - white	1 ROL / 46 BOX
	Hard PVC	6,000	101933	90 - black	1 ROL / 46 BOX



Ventilation strip square perforated rolled PVC

150-mm rolled ventilation strips with square perforations. **Ventilation area:** 648 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3682	Hard PVC	500	101981	47 - brown	12 ROL / 24 BOX
	Hard PVC	500	101965	10 - white	12 ROL / 24 BOX
	Hard PVC	500	102000	90 - black	12 ROL / 24 BOX
	Hard PVC	500	101970	33 - brick-red	12 ROL / 24 BOX



VENTILATION PROFILES


VENTILATION STRIP SQUARE PERFORATION PVC

Ventilation strip square perforation rolled PVC

180-mm rolled ventilation strips with square perforations.

Ventilation area: 792 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3683	Hard PVC	500	102015	90 - black	6 ROL / 40 BOX
	Hard PVC	500	102007	10 - white	6 ROL / 40 BOX
	Hard PVC	500	102013	47 - brown	6 ROL / 40 BOX
	Hard PVC	500	102011	33 - brick-red	6 ROL / 40 BOX




VENTILATION PROFILES

VENTILATION ANGLES WITH OVAL PERFORATION

Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 30 mm with double-sided oval perforation. **Ventilation area:** 137/137 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package / Large pack
9603	Aluminum	250	115255	NA - natur	20 PCS / 224 BUN
9613	Aluminum	250	115259	90 - black	20 PCS / 224 BUN



Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 40 mm with double-sided oval perforation. **Ventilation area:** 137/191 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package / Large pack
9604	Aluminum	250	115260	NA - natur	20 PCS / 168 BUN



Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 50 mm with double-sided oval perforation. **Ventilation area:** 137/246 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package / Large pack
9605	Aluminum	250	115261	NA - natur	20 PCS / 144 BUN
9615	Aluminum	250	115264	90 - black	20 PCS / 144 BUN



Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 60 mm with double-sided oval perforation. **Ventilation area:** 137/300 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package / Large pack
9606	Aluminum	250	115265	NA - natur	20 PCS / 120 BUN



Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 70 mm with double-sided oval perforation. **Ventilation area:** 137/355 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package / Large pack
9607	Aluminum	250	115267	NA - natur	20 PCS / 117 BUN
9617	Aluminum	250	115268	90 - black	20 PCS / 103 BUN



VENTILATION PROFILES


VENTILATION ANGLES WITH OVAL PERFORATION

Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 80 mm
with double-sided oval perforation.

Ventilation area: 137/409 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9608	Aluminum	250	115269	NA - natur	20 PCS / 104 BUN




Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 90 mm
with double-sided oval perforation.

Ventilation area: 137/464 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9609	Aluminum	250	115271	NA - natur	20 PCS / 84 BUN
9619	Aluminum	250	115272	90 - black	20 PCS / 84 BUN




Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 100 mm
with double-sided oval perforation.

Ventilation area: 137/518 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9610	Aluminum	250	115273	NA - natur	20 PCS / 83 BUN




Ventilation angle double-sided oval perforation Alu

Ventilation angle of 30 x 120 mm
with double-sided oval perforation.

Ventilation area: 137/627 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9612	Aluminum	250	115274	NA - natur	20 PCS / 69 BUN




Ventilation angle one-sided oval perforation Alu

Ventilation angle 10 x 50 mm
with double-sided oval perforation.

Ventilation area: 220 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9695	Aluminum	250	113774	NA - natur	20 PCS / 200 BUN



VENTILATION PROFILES


VENTILATION ANGLES WITH OVAL PERFORATION

Ventilation angle one-sided oval perforation Alu

Ventilation angle 10 x 70 mm
with double-sided oval perforation.

Ventilation area: 310 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9697	Aluminum	250	113775	NA - natur	20 PCS / 200 BUN




Ventilation angle one-sided oval perforation Alu

Ventilation angle 10 x 90mm
with double-sided oval perforation.

Ventilation area: 410 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9699	Aluminum	250	113776	NA - natur	20 PCS / 200 BUN




Ventilation angle one-sided oval perforation PVC

Ventilation angle of 30 x 30 mm
with single-sided oval perforation.

Ventilation area: 94 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3830	Hard PVC	250	108460	90 - black	20 PCS / 140 BUN
	Hard PVC	250	108458	33 - brick-red	20 PCS / 140 BUN
	Hard PVC	250	108457	10 - white	20 PCS / 140 BUN
	Hard PVC	250	108459	47 - brown	20 PCS / 140 BUN




Ventilation angle one-sided oval perforation PVC

Ventilation angle of 30 x 50 mm
with single-sided oval perforation.

Ventilation area: 188 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3832	Hard PVC	250	108464	90 - black	20 PCS / 80 BUN
	Hard PVC	250	108462	33 - brick-red	20 PCS / 80 BUN
	Hard PVC	250	108463	47 - brown	20 PCS / 80 BUN
	Hard PVC	250	108461	10 - white	20 PCS / 80 BUN




Ventilation angle one-sided oval perforation PVC

Ventilation angle of 30 x 60 mm
with single-sided oval perforation.

Ventilation area: 252 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3833	Hard PVC	250	108468	90 - black	20 PCS / 90 BUN
	Hard PVC	250	108465	10 - white	20 PCS / 90 BUN
	Hard PVC	250	108466	33 - brick-red	20 PCS / 90 BUN
	Hard PVC	250	108467	47 - brown	20 PCS / 90 BUN



VENTILATION PROFILES


VENTILATION ANGLES WITH OVAL PERFORATION

Ventilation angle one-sided oval perforation PVC

Ventilation angle of 30 x 70 mm
with single-sided oval perforation.

Ventilation area: 310 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3834	Hard PVC	250	108469	10 - white	20 PCS / 72 BUN
	Hard PVC	250	108472	90 - black	20 PCS / 72 BUN
	Hard PVC	250	108471	47 - brown	20 PCS / 72 BUN
	Hard PVC	250	108470	33 - brick-red	20 PCS / 72 BUN




Ventilation angle one-sided oval perforation PVC

Ventilation angle of 30 x 90 mm
with single-sided oval perforation.

Ventilation area: 410 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3836	Hard PVC	250	108474	33 - brick-red	20 PCS / 48 BUN
	Hard PVC	250	108473	10 - white	20 PCS / 48 BUN
	Hard PVC	250	108475	47 - brown	20 PCS / 48 BUN
	Hard PVC	250	108476	90 - black	20 PCS / 48 BUN



VENTILATION PROFILES


VENTILATION STRIP OVAL PERFORATION ALU

Ventilation strip oval perforation Alu

60-mm ventilation strips with oval perforations.

Ventilation area: 284 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 9626	Aluminum	250	108927	NA - natur	20 PCS / 154 BUN




Ventilation strip oval perforation Alu

70-mm ventilation strips with oval perforations.

Ventilation area: 315 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 9627	Aluminum	250	108928	NA - natur	20 PCS / 135 BUN




Ventilation strip oval perforation Alu

80-mm ventilation strips with oval perforations.

Ventilation area: 378 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 9628	Aluminum	250	108929	NA - natur	20 PCS / 120 BUN




Ventilation strip oval perforation Alu

90-mm ventilation strips with oval perforations.

Ventilation area: 410 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 9629	Aluminum	250	108930	NA - natur	20 PCS / 106 BUN




Ventilation strip oval perforation Alu

100-mm ventilation strips with oval perforations.

Ventilation area: 473 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
SALE 9630	Aluminum	250	108931	NA - natur	20 PCS / 80 BUN




VENTILATION PROFILES

VENTILATION STRIP OVAL PERFORATION ALU

Ventilation strip oval perforation Alu

120-mm ventilation strips
with oval perforations.

Ventilation area: 567 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9632	Aluminum	250	108932	NA - natur	20 PCS / 75 BUN

SALE

Ventilation strip oval perforation rolled Alu

Rolled 50-mm ventilation
strips with oval perforations
in a convenient dispenser case.

Ventilation area: 221 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9640	Aluminum	6,000	109408	NA - natur	2 ROL / 46 BOX
9644	Aluminum	6,000	109420	97 - white/brown	2 ROL / 46 BOX
9648	Aluminum	6,000	109414	98 - black/red	2 ROL / 46 BOX

Ventilation strip oval perforation rolled Alu

Ventilation strips 80 mm
rolled with oval perforations
inside a convenient dispenser case.

Ventilation area: 378 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9641	Aluminum	6,000	109410	NA - natur	1 ROL / 46 BOX
9645	Aluminum	6,000	109422	97 - white/brown	1 ROL / 46 BOX
9649	Aluminum	6,000	109416	98 - black/red	1 ROL / 46 BOX

Ventilation strip oval perforation rolled Alu

Rolled 100-mm ventilation
strips with oval perforations
in a convenient dispenser case.

Ventilation area: 473 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9642	Aluminum	6,000	109412	NA - natur	1 ROL / 46 BOX
9646	Aluminum	6,000	109424	97 - white/brown	1 ROL / 46 BOX
9650	Aluminum	6,000	109418	98 - black/red	1 ROL / 46 BOX

VENTILATION PROFILES

VENTILATION STRIP OVAL PERFORATION PVC

Ventilation strip oval perforation rolled PVC

50-mm rolled ventilation strips with oval perforations.

Ventilation area: 220 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3841	Hard PVC	500	108478	33 - brick-red	32 ROL / 42 BOX
	Hard PVC	500	108477	10 - white	32 ROL / 42 BOX
	Hard PVC	500	108479	47 - brown	32 ROL / 42 BOX
	Hard PVC	500	108480	90 - black	32 ROL / 42 BOX
3846	Hard PVC	6,000	108492	90 - black	2 ROL / 46 BOX
	Hard PVC	6,000	108490	33 - brick-red	2 ROL / 46 BOX
	Hard PVC	6,000	108491	47 - brown	2 ROL / 46 BOX
	Hard PVC	6,000	108489	10 - white	2 ROL / 46 BOX




Ventilation strip oval perforation rolled PVC

80-mm rolled ventilation strips with oval perforations.

Ventilation area: 378 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3842	Hard PVC	500	108482	33 - brick-red	16 ROL / 42 BOX
	Hard PVC	500	108483	47 - brown	16 ROL / 42 BOX
	Hard PVC	500	108481	10 - white	16 ROL / 42 BOX
	Hard PVC	500	108484	90 - black	16 ROL / 42 BOX
3847	Hard PVC	6,000	108494	33 - brick-red	1 ROL / 46 BOX
	Hard PVC	6,000	108496	90 - black	1 ROL / 46 BOX
	Hard PVC	6,000	108493	10 - white	1 ROL / 46 BOX
	Hard PVC	6,000	108495	47 - brown	1 ROL / 46 BOX



Ventilation strip oval perforation rolled PVC

100-mm rolled ventilation strips with oval perforations.

Ventilation area: 472 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3843	Hard PVC	500	108488	90 - black	16 ROL / 42 BOX
	Hard PVC	500	108485	10 - white	16 ROL / 42 BOX
	Hard PVC	500	108486	33 - brick-red	16 ROL / 42 BOX
	Hard PVC	500	108487	47 - brown	16 ROL / 42 BOX
3848	Hard PVC	6,000	108454	33 - brick-red	1 ROL / 46 BOX
	Hard PVC	6,000	108456	90 - black	1 ROL / 46 BOX
	Hard PVC	6,000	108455	47 - brown	1 ROL / 46 BOX
	Hard PVC	6,000	108453	10 - white	1 ROL / 46 BOX




Ventilation strip square perforation rolled PVC

150-mm rolled ventilation strips with square perforations.

Ventilation area: 648 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3844	Hard PVC	500	108624	90 - black	12 ROL / 24 BOX
	Hard PVC	500	108623	47 - brown	12 ROL / 24 BOX
	Hard PVC	500	108621	10 - white	12 ROL / 24 BOX
	Hard PVC	500	108622	33 - brick-red	12 ROL / 24 BOX



VENTILATION PROFILES

VENTILATION STRIP OVAL PERFORATION PVC

Ventilation strip square perforation rolled PVC

180-mm rolled ventilation strips
with square perforations.


Ventilation area: 792 cm²/lfm.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3845	Hard PVC	500	108628	90 - black	6 ROL / 40 BOX
	Hard PVC	500	108626	33 - brick-red	6 ROL / 40 BOX
	Hard PVC	500	108627	47 - brown	6 ROL / 40 BOX
	Hard PVC	500	108625	10 - white	6 ROL / 40 BOX







INSTRUCTIONS FOR APPLICATION

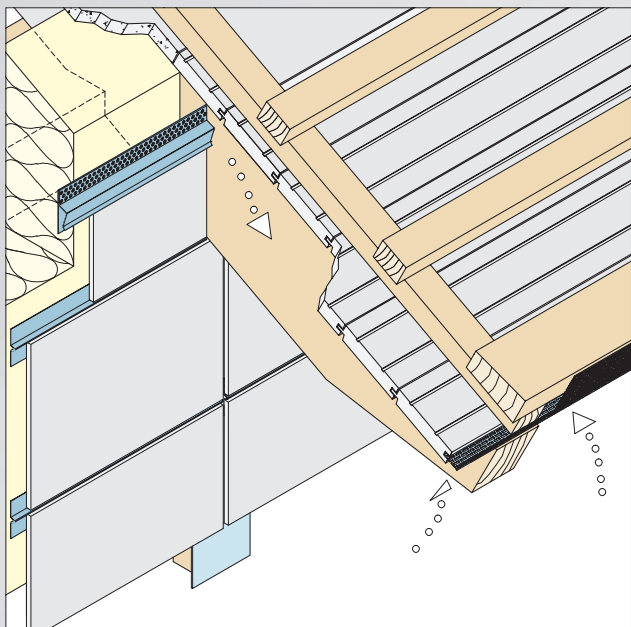

The ventilation profiles 9056 and 9059 are used in the upper facade area and under the window sills. The profiles can be used for board thicknesses of 4 to 6 mm and 8 to 15 mm.

The ventilation profiles 3662, 3663 and 3664 ensure a clean and flush facade stop with the horizontal and slanted roof side.




EAVES VENTILATION

Eaves ventilation Alu

Eaves ventilation profile for sheet thicknesses of 4 - 6 mm. **Ventilation area:** 75 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9056	Aluminum	250	101586	NA - natur	10 PCS / 100 BUN




Eaves ventilation Alu

Eaves ventilation profile for sheet thicknesses of 8 - 15 mm. **Ventilation area:** 75 cm²/lfm.




Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9059	Aluminum	250	101590	NA - natur	10 PCS / 100 BUN



Eaves ventilation PVC

Eaves ventilation profile for sheet thicknesses of 9 mm. **Ventilation area:** 100 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3662	Hard PVC	250	102315	90 - black	20 PCS / 35 BUN
	Hard PVC	250	102308	10 - white	20 PCS / 35 BUN



Eaves ventilation PVC

Eaves ventilation profile for sheet thicknesses of 17 mm. **Ventilation area:** 100 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3663	Hard PVC	250	102328	10 - white	20 PCS / 23 BUN
	Hard PVC	250	102335	47 - brown	20 PCS / 23 BUN
	Hard PVC	250	102337	90 - black	20 PCS / 23 BUN



Eaves ventilation PVC

Eaves ventilation profile for sheet thicknesses of 27 mm. **Ventilation area:** 104 cm²/lfm.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3618	Hard PVC	250	101141	10 - white	10 PCS / 88 BUN
	Hard PVC	250	101154	90 - black	10 PCS / 88 BUN



EAVES VENTILATION

Eaves profile


Eaves profile 85 x 30 mm, 135 °.
For the optimal removal of moisture that gets onto the underlay or underlay through the ingress of rain, drifting snow or condensate.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9385	Aluminum	250	116681	NA - natur	10 PCS / 140 BUN

Eaves ventilation Alu


Eaves ventilation profile for corrugated sheets, profile 5 and “Berliner Welle”.
Ventilation area: 362 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9063	Aluminum	87	105841	NA - natur	50 PCE / 26 BOX

Eaves ventilation PVC


Eaves ventilation profile for corrugated sheets, profile 5 and “Berliner Welle”.
Ventilation area: 695 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3687	Hard PVC	87	102424	90 - black	50 PCE / 99 BOX
	Hard PVC	87	102420	47 - brown	50 PCE / 36 BOX

Eaves ventilation PVC

Eaves ventilation profile for corrugated sheets, profile 6.
Ventilation area: 695 cm²/lfm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
3688	Hard PVC	105	111783	47 - brown	50 PCE / 28 BOX
	Hard PVC	105	111639	90 - black	50 PCE / 28 BOX

SPECIAL PROFILES

We have tools for custom profiles for specialised purposes not listed in the catalogue. After a feasibility mstudy, we need the following documents in order to generate a quotation:

- dimensioned drawing
- material specifications

Kindly contact us directly for a quote.

Please note the minimum production quantity of 200 metres per dimension.


The aforementioned special profiles can only be manufactured after an order has been submitted in writing and the necessary drawings and material specifications have been provided.

For powder coated parts, order the total quantity required to prevent differences in coating. There is no guarantee that the coating in repeat orders will appear exactly the same. Returns are therefore excluded.

Returns of fixed length orders, special profile and special accessory orders are excluded as well. For special parts, we reserve the right to deliver maximum or minimum quantities of $\pm 10\%$.

Custom designed profiles or special accessories are only manufactured according to customer requirements and under the exclusion of liability with regards to rights of third parties. We assume no liability for the stability and functionality of custom designs according to customer requirements.

EXAMPLES

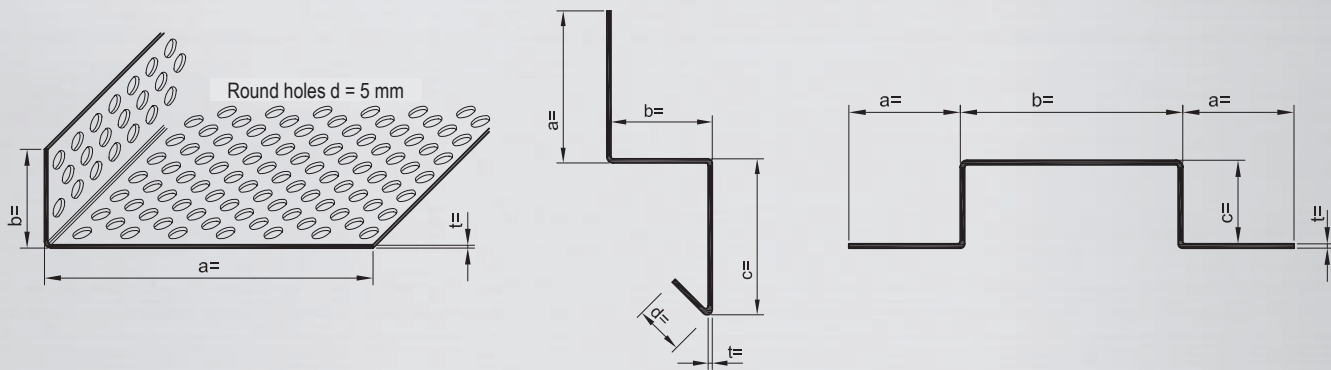

COLOUR COATING

All standard and special profiles made of aluminium can be polyester-powder coated if the RAL colour coding colour is indicated. Please contact us! Coating is possible from just 2 packaging units onwards.





ROOF DRAINAGE

Since 1964 we manufacture gutters made of plastic. Protektor gutters are without softener and can not embrittle. Due to the high-quality of the raw material the gutter ensures **impact resistance and a great UV and form stability.**

These quality characteristics are based on extensive tests. Environmental influences like acid rain, deposits of flue gases and salty air near the sea cannot damage the Protektor gutters. They are resistant against alkaline solutions and

acids. Beyond that the experience in the application and processing of high quality plastics such as co-extrusion (applying of a protective acryl layer on the base of the gutter) gives an improved surface quality and therefore, secures the high colour brilliance, and this also after many years.

As Protektor gutters are produced according to DIN, it is possible without any problems to mount the gutter into already existing gutter brackets.

DELIVERY, PACKAGING, FIRE PROPERTIES

Free delivery for net product values of 650.00 € and up

We ask for your understanding that, in cases of deviations in packaging units for gutters, downpipes, leaf guards, leaf trap grids, gutter brushes and roof strips, we charge a fee of 10.00 € per order for unpacking and repacking.

The disposal of packaging is regulated by Interseroh. Recycling certificate no. 25608

Fire properties: PROTEKTOR roof gutters are made of PVC-U. This plasticiser-free polyvinyl chloride (PVC-U), pursuant to DIN 19531, is classified as building material class B1 - not easily flammable - under DIN 4102, part 4

COLOURS

similar to RAL 9003 white (BA)	similar to RAL 7040 grey (BB)
similar to RAL 8024 brown (BD)	similar to RAL 8019 dark brown (BC)
similar to RAL 7016 anthracite grey (91)	

Our PROTEKTOR hard PVC profiles achieve the highest possible light durability level (level 8) on the wool scale. The formula we have developed together with our suppliers, prevents the usage of waste or reclaimed materials in our products. In accordance with our General Sales terms and conditions (section 6), we provide a guarantee of 5 years for the technical functionality.

HOW TO FIND THE CORRECT PIPE FOR YOUR ROOF DRAINAGE.

How to find the correct pipe for your roof drainage. The indicated m² values of the roof ground plan area are criterions to find the right gutter size.

According to DIN EN 12056-3 and DIN 1986-100 for each object a calculation of the rain water down pipe should be done. This is necessary to determine the exact gutter size.

PROTEKTOR – Halfround gutter		
Roof area to be drained / Square area in m²	Rainwater drainpipe	Halfround gutter
to ca. 50 m²	DN 75	8-tlg. (NW 100)
to ca. 80 m²	DN 85	7-tlg. (NW 125)
to ca. 150 m²	DN 100	6-tlg. (NW 150)
to ca. 220 m²	DN 125	5-tlg. (NW 180)

PROTEKTOR – Boxgutters		
Roof area to be drained / Square area in m²	Rainwater drainpipe	Boxgutters
to ca. 15 m²	DN 50	10-tlg. (NW 68)
to ca. 30 m²	DN 75	8-tlg. (NW 83)
to ca. 80 m²	DN 85	6-tlg. (NW 115)

HALFROUND GUTTERS

NOMINAL SIZE (NW) 100 / 8-PART

Semi-circular gutter

NW 100 half-round gutter
made of UV-resistant and shockproof PVC.

Floor width: 120
Notes:
Bead height: 65 mm
Rebate height: 75 mm

Item number	Material	Length (cm)	Order number	Color	Packaging
84501	PVC-U	200	105627	BA - white	5 PCS
84500	PVC-U	400	105624	BA - white	5 PCS
82000	PVC-U	200	105628	BB - grey	5 PCS
81000	PVC-U	400	105617	BB - grey	5 PCS
83601	PVC-U	200	105629	BD - brown	5 PCS
83600	PVC-U	400	105625	BD - brown	5 PCS
86101	PVC-U	200	105630	BC - dark brown	5 PCS
86100	PVC-U	400	105618	BC - dark brown	5 PCS
88601	PVC-U	200	114020	91 - anthracite	5 PCS
88600	PVC-U	400	114019	91 - anthracite	5 PCS



Gutter connector to clamp

Clip-on gutter connecting piece
made of UV-resistant and shockproof PVC
providing expansion compensation
for NW 100 half-round gutters.

Notes:
With laying temperature scale!
Processing instructions:
Only clip on, do not slide in!

Item number	Material	Length (cm)	Order number	Color	Packaging
84520	PVC-U	19	116356	BA - white	10 PCE
81020	PVC-U	19	116357	BB - grey	10 PCE
83620	PVC-U	19	116358	BD - brown	10 PCE
86120	PVC-U	19	116359	BC - dark brown	10 PCE
88603	PVC-U	19	116360	91 - anthracite	10 PCE



Semi-circular gutter cover left to clamp

Clip-on gutter end piece
made of UV-resistant and shockproof PVC
for the left end of
NW 100 half-round gutters.

Notes:
Left-hand end.

Item number	Material	Length (cm)	Order number	Color	Packaging
84513	PVC-U	4	104549	BA - white	5 PCE
82013	PVC-U	4	104686	BB - grey	5 PCE
	PVC-U	4	118685	BB - grey	5 PCE
83713	PVC-U	4	104845	BD - brown	5 PCE
86113	PVC-U	4	104515	BC - dark brown	5 PCE
88605	PVC-U	4	118584	91 - anthracite	5 PCE



Semi-circular gutter cover right for clamp

Clip-on gutter end piece
made of UV-resistant and shockproof PVC
for the right end of
NW 100 half-round gutters.

Notes:
Right-hand end.

Item number	Material	Length (cm)	Order number	Color	Packaging
84514	PVC-U	0	104557	BA - white	5 PCE
82014	PVC-U	4	118686	BB - grey	5 PCE
83714	PVC-U	4	104852	BD - brown	5 PCE
86114	PVC-U	4	104516	BC - dark brown	5 PCE
88604	PVC-U	4	118586	91 - anthracite	5 PCE



HALFROUND GUTTERS

NOMINAL SIZE (NW) 100 / 8-PART

Clip support

Clip-on drain fitting
made of UV-resistant and shockproof PVC
for NW 100 half-round gutters
and DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84517	PVC-U	19	118583	BA - white	5 PCE
82017	PVC-U	19	104692	BB - grey	5 PCE
83617	PVC-U	19	104878	BD - brown	5 PCE
86117	PVC-U	19	118585	BC - dark brown	5 PCE
88607	PVC-U	19	118582	91 - anthracite	5 PCE



Semi-circular gutter angle 90° outside to clamp

Clip-on 90° outside gutter angle
made of UV-resistant and shockproof PVC
for NW 100 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84511	PVC-U	19	104524	BA - white	20 PCE
81011	PVC-U	19	119115	BB - grey	20 PCE
86111	PVC-U	19	104513	BC - dark brown	20 PCE



Semi-circular gutter angle 90° inside to clamp

Clip-on 90° inside gutter angle
made of UV-resistant and shockproof PVC
for NW 100 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84512	PVC-U	18	104542	BA - white	20 PCE
81012	PVC-U	18	119471	BB - grey	20 PCE
83612	PVC-U	18	104866	BD - brown	20 PCE
86112	PVC-U	18	104514	BC - dark brown	20 PCE



Gutter bracket galvanized

Galvanised gutter bracket
for NW 100 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
82012	Galvanised steel	40	104685		20 PCE



HALFROUND GUTTERS

NOMINAL SIZE (NW) 100 / 8-PART

Gutter bracket galvanized/plastic coated

Galvanised gutter bracket
with plastic coating
for NW 100 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
84502	Galvanised steel	40	104490	BA - white	20 PCE
81002	Galvanised steel	40	104215	BB - grey	20 PCE
83602	Galvanised steel	40	104856	BD - brown	20 PCE
86102	Galvanised steel	40	104250	BC - dark brown	20 PCE
88608	Galvanised steel	40	114027	91 - anthracite	20 PCE



Semi-circular gutter bracket support plastic

Fascia board gutter bracket
made of UV-resistant and shockproof PVC
for NW 100 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84503	PVC-U	14	104497	BA - white	20 PCE
81008	PVC-U	14	104217	BB - grey	20 PCE
83608	PVC-U	14	104860	BD - brown	20 PCE
86108	PVC-U	14	104251	BC - dark brown	20 PCE
88639	PVC-U	14	119573	91 - anthracite	20 PCE



Semi-circular gutter bracket support plastic adjust. 9 - 30°

Fascia board gutter bracket
made of UV-resistant and shockproof PVC
for NW 100 half-round gutters.

Notes:
Adjustable from 9 - 30°.

Item number	Material	Length (cm)	Order number	Color	Packaging
84439	PVC-U	14	104435	BA - white	20 PCE
81039	PVC-U	14	104229	BB - grey	20 PCE
83639	PVC-U	14	104814	BD - brown	20 PCE
86139	PVC-U	14	104263	BC - dark brown	20 PCE
88606	PVC-U	14	114025	91 - anthracite	20 PCE




Leaf trap grid NW 100 + NW 125

Leaf trap grid
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.

Item number	Material	Length (cm)	Order number	Color	Packaging
85518	PE	200	112357	90 - black	10 PCS
	PE	300	104274	90 - black	10 PCS



HALFROUND GUTTERS

NOMINAL SIZE (NW) 100 / 8-PART

Leaf trap grid NW 100 + NW 125

Leaf trap grid on the roll,
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85520	PE	300	117415	90 - black	1 ROL

Hedgehog gutter brush NW 100 + NW 125

Hedgehog gutter brush
for NW 100 and NW 125 half-round gutters.

Notes:
Not suitable for copper gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
85562		120	109648	90 - black	28 PCE

Leaf trap stripe NW 100 + NW 125 + NW 150

Leaf guard
for gutter sizes of NW 100 to NW 150.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85558	PP	100	109464	90 - black	30 PCS
85559	PP	100	109465	BB - grey	30 PCS
85560	PP	100	109466	BD - brown	30 PCS

HALFROUND GUTTERS

NOMINAL SIZE (NW) 125 / 7-PART

Semi-circular gutter

NW 125 half-round gutter
made of UV-resistant and shockproof PVC.

Notes:
Bead height: 74 mm
Rebate height: 84 mm
Floor width: 140

Item number	Material	Length (cm)	Order number	Color	Packaging
84201	PVC-U	200	105580	BA - white	5 PCS
84200	PVC-U	400	105579	BA - white	5 PCS
82200	PVC-U	200	105601	BB - grey	5 PCS
81200	PVC-U	400	105603	BB - grey	5 PCS
83001	PVC-U	200	105571	BD - brown	5 PCS
83000	PVC-U	400	105570	BD - brown	5 PCS
86201	PVC-U	200	105574	BC - dark brown	5 PCS
86200	PVC-U	400	105572	BC - dark brown	5 PCS



Gutter connector to clamp

Clip-on gutter connecting piece made of UV-resistant and shockproof PVC providing expansion compensation for NW 125 half-round gutters.

Notes:
With laying temperature scale!
Processing instructions:
Just clip it on, don't push it in!

Item number	Material	Length (cm)	Order number	Color	Packaging
84220	PVC-U	25	116363	BA - white	10 PCE
81220	PVC-U	25	116364	BB - grey	10 PCE
83020	PVC-U	25	116365	BD - brown	10 PCE
86220	PVC-U	25	116372	BC - dark brown	10 PCE



Semi-circular gutter cover left to clamp

Clip-on gutter end piece made of UV-resistant and shockproof PVC for the left end of NW 125 half-round gutters.

Notes:
Left-hand end.

Item number	Material	Length (cm)	Order number	Color	Packaging
84313	PVC-U	4	104349	BA - white	5 PCE
82213	PVC-U	4	104607	BB - grey	5 PCE
83213	PVC-U	4	104816	BD - brown	5 PCE
86213	PVC-U	4	104530	BC - dark brown	5 PCE



Semi-circular gutter cover right for clamp

Clip-on gutter end piece made of UV-resistant and shockproof PVC for the right end of NW 125 half-round gutters.

Notes:
Right-hand end.

Item number	Material	Length (cm)	Order number	Color	Packaging
84314	PVC-U	4	104353	BA - white	5 PCE
82214	PVC-U	4	104608	BB - grey	5 PCE
83214	PVC-U	4	104819	BD - brown	5 PCE
86214	PVC-U	4	104531	BC - dark brown	5 PCE



HALFROUND GUTTERS

NOMINAL SIZE (NW) 125 / 7-PART

Clip support

Clip-on drain fitting
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters and DN 75 rainwater
downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84017	PVC-U	23	104914	BA - white	5 PCE
82417	PVC-U	23	104634	BB - grey	5 PCE
83227	PVC-U	23	104840	BD - brown	5 PCE
86617	PVC-U	23	104566	BC - dark brown	5 PCE



Clip support

Clip-on drain fitting
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters and DN 85 rainwater
downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
82217	PVC-U	21	104618	BB - grey	5 PCE
83017	PVC-U	21	104744	BD - brown	5 PCE



Clip support

Clip-on drain fitting
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters and DN 100 rain-
water downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84417	PVC-U	23	104382	BA - white	5 PCE
82317	PVC-U	23	104629	BB - grey	5 PCE
83817	PVC-U	23	104893	BD - brown	5 PCE
86217	PVC-U	23	104532	BC - dark brown	5 PCE



Semi-circular gutter angle 90° outside to clamp

Clip-on 90° outside gutter angle
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84211	PVC-U	22	104934	BA - white	16 PCE
81211	PVC-U	22	118697	BB - grey	16 PCE
83011	PVC-U	22	104729	BD - brown	16 PCE
86211	PVC-U	22	104525	BC - dark brown	16 PCE



Semi-circular gutter angle 90° inside to clamp

Clip-on 90° inside gutter angle
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84212	PVC-U	20	104935	BA - white	16 PCE
81212	PVC-U	20	104482	BB - grey	16 PCE
83012	PVC-U	20	104732	BD - brown	16 PCE
86212	PVC-U	20	104527	BC - dark brown	16 PCE



HALFROUND GUTTERS

NOMINAL SIZE (NW) 125 / 7-PART

Gutter bracket galvanized

Galvanised gutter bracket
for NW 125 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
82212	Galvanised steel	44	104605		20 PCE



Gutter bracket galvanized/plastic coated

Galvanised gutter bracket
with plastic coating for
for NW 125 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
84202	Galvanised steel	44	104930	BA - white	20 PCE
81202	Galvanised steel	44	104333	BB - grey	20 PCE
83002	Galvanised steel	44	104723	BD - brown	20 PCE
86202	Galvanised steel	44	104290	BC - dark brown	20 PCE



Semi-circular gutter bracket support plastic

Fascia board gutter bracket
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84209	PVC-U	16	104933	BA - white	20 PCE
81209	PVC-U	16	104472	BB - grey	20 PCE
83009	PVC-U	16	104728	BD - brown	20 PCE
86208	PVC-U	16	104297	BC - dark brown	20 PCE



Semi-circular gutter bracket support plastic adjust. 9 - 30°

Fascia board gutter bracket
made of UV-resistant and shockproof PVC
for NW 125 half-round gutters.

Notes:
Adjustable from 9 - 30°.

Item number	Material	Length (cm)	Order number	Color	Packaging
84239	PVC-U	16	106832	BA - white	20 PCE
81239	PVC-U	16	106833	BB - grey	20 PCE
83039	PVC-U	16	106834	BD - brown	20 PCE
86239	PVC-U	16	106835	BC - dark brown	20 PCE




Leaf trap grid NW 100 + NW 125

Leaf trap grid
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.

Item number	Material	Length (cm)	Order number	Color	Packaging
85518	PE	200	112357	90 - black	10 PCS
	PE	300	104274	90 - black	10 PCS



HALFROUND GUTTERS

NOMINAL SIZE (NW) 125 / 7-PART

Leaf trap grid NW 100 + NW 125

Leaf trap grid on the roll,
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85520	PE	300	117415	90 - black	1 ROL

Leaf trap stripe NW 100 + NW 125 + NW 150

Leaf guard
for gutter sizes of NW 100 to NW 150.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85558	PP	100	109464	90 - black	30 PCS
85559	PP	100	109465	BB - grey	30 PCS
85560	PP	100	109466	BD - brown	30 PCS

Hedgehog gutter brush NW 100 + NW 125

Hedgehog gutter brush
for NW 100 and NW 125 half-round gutters.

Notes:
Not suitable for copper gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
85562		120	109648	90 - black	28 PCE

HALFROUND GUTTERS

NOMINAL SIZE (NW) 150 / 6-PART

Semi-circular gutter

NW 150 half-round gutter
made of UV-resistant and shockproof PVC.

Notes:
Bead height: 88 mm
Rebate height: 100 mm
Floor width: 160



Item number	Material	Length (cm)	Order number	Color	Packaging
84601	PVC-U	200	106115	BA - white	4 PCS
84600	PVC-U	400	106114	BA - white	4 PCS
82500	PVC-U	200	106110	BB - grey	4 PCS
81500	PVC-U	400	106111	BB - grey	4 PCS
83101	PVC-U	200	106117	BD - brown	4 PCS
83100	PVC-U	400	106116	BD - brown	4 PCS
86301	PVC-U	200	106119	BC - dark brown	4 PCS
86300	PVC-U	400	106118	BC - dark brown	4 PCS

Gutter connector to clamp

Clip-on gutter connecting piece
made of UV-resistant and shockproof PVC
providing expansion compensation
for NW 150 half-round gutters.

Notes:
With laying temperature scale!
Processing instructions:
Only clip on, do not slide in!



Item number	Material	Length (cm)	Order number	Color	Packaging
84620	PVC-U	25	116371	BA - white	10 PCE
81520	PVC-U	25	119054	BB - grey	10 PCE
83120	PVC-U	25	116370	BD - brown	10 PCE
86320	PVC-U	25	116374	BC - dark brown	10 PCE

Semi-circular gutter cover left to clamp

Clip-on gutter end piece
made of UV-resistant and shockproof PVC
for the left end of
NW 150 half-round gutters.

Notes:
Left-hand end.



Item number	Material	Length (cm)	Order number	Color	Packaging
84713	PVC-U	4	119315	BA - white	5 PCE
82513	PVC-U	4	118588	BB - grey	5 PCE
83313	PVC-U	4	104844	BD - brown	5 PCE
86313	PVC-U	4	119313	BC - dark brown	5 PCE

Semi-circular gutter cover right for clamp

Clip-on gutter end piece
made of UV-resistant and shockproof PVC
for the right end of
NW 150 half-round gutters.

Notes:
Right-hand end.



Item number	Material	Length (cm)	Order number	Color	Packaging
84714	PVC-U	4	119316	BA - white	5 PCE
82514	PVC-U	4	118587	BB - grey	5 PCE
83314	PVC-U	4	104847	BD - brown	5 PCE
86314	PVC-U	4	119314	BC - dark brown	5 PCE

HALFROUND GUTTERS

NOMINAL SIZE (NW) 150 / 6-PART

Clip support

Clip-on drain fitting
made of UV-resistant and shockproof PVC
for NW 150 half-round gutters and DN 100 rain-
water downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84717	PVC-U	23	104676	BA - white	5 PCE
82517	PVC-U	23	118920	BB - grey	5 PCE
83117	PVC-U	23	104731	BD - brown	5 PCE
86317	PVC-U	23	104545	BC - dark brown	5 PCE



Semi-circular gutter angle 90° outside to clamp

Clip-on 90° outside gutter angle
made of UV-resistant and shockproof PVC
for NW 150 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84611	PVC-U	24	104599	BA - white	10 PCE
81511	PVC-U	24	104328	BB - grey	10 PCE
83111	PVC-U	24	119747	BD - brown	10 PCE
86311	PVC-U	24	104537	BC - dark brown	10 PCE



Semi-circular gutter angle 90° inside to clamp

Clip-on 90° inside gutter angle
made of UV-resistant and shockproof PVC
for NW 150 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84612	PVC-U	22	104602	BA - white	10 PCE
81512	PVC-U	22	104330	BB - grey	10 PCE
83112	PVC-U	22	104804	BD - brown	10 PCE
86312	PVC-U	22	104539	BC - dark brown	10 PCE



Gutter bracket galvanized

Galvanised gutter bracket
for NW 150 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
82512	Galvanised steel	48	104640		20 PCE



Gutter bracket galvanized/plastic coated

Galvanised gutter bracket
with plastic coating for
for NW 150 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
84602	Galvanised steel	48	104583	BA - white	20 PCE
81502	Galvanised steel	48	104321	BB - grey	20 PCE
83102	Galvanised steel	48	104791	BD - brown	20 PCE
86302	Galvanised steel	48	104308	BC - dark brown	20 PCE




HALFROUND GUTTERS

NOMINAL SIZE (NW) 150 / 6-PART

Leaf trap grid NW 150 + NW 180

Leaf trap grid
for gutter sizes of NW 150 to NW 180.

Notes:
Do not use plastic leaf guards on metal-only roofs, as heat can build up in permanent sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85519	PE	200	112356	90 - black	10 PCS
	PE	300	104275	90 - black	10 PCS

Leaf trap stripe NW 100 + NW 125 + NW 150

Leaf guard
for gutter sizes of NW 100 to NW 150.

Notes:
Do not use plastic leaf guards on metal-only roofs, as heat can build up in permanent sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85558	PP	100	109464	90 - black	30 PCS
85559	PP	100	109465	BB - grey	30 PCS
85560	PP	100	109466	BD - brown	30 PCS

HALFROUND GUTTERS

NOMINAL SIZE (NW) 180 / 5-PART

Semi-circular gutter

NW 180 half-round gutter
made of UV-resistant and shockproof PVC.

Notes:
Bead height: 107 mm
Rebate height: 120 mm
Floor width: 190



Item number	Material	Length (cm)	Order number	Color	Packaging
81800	PVC-U	400	106113	BB - grey	3 PCS

Gutter connector to clamp

Clip-on gutter connecting piece
made of UV-resistant and shockproof PVC
providing expansion compensation
for NW 180 half-round gutters.

Notes:
With laying temperature scale!
Processing instructions:
Only clip on, do not slide in!



Item number	Material	Length (cm)	Order number	Color	Packaging
81820	PVC-U	25	116369	BB - grey	14 PCE

Semi-circular gutter cover left for sticking

Adhesive gutter end piece
made of UV-resistant and shockproof PVC
for the left end of
half-round NW 180 gutters.

Notes:
Left-hand end.
Processing instructions:
Special adhesive no. 81250 should be used for
this gutter end piece.



Item number	Material	Length (cm)	Order number	Color	Packaging
81813	PVC-U	2	104536	BB - grey	5 PCE

Semi-circular gutter cover right for sticking

Adhesive gutter end piece
made of UV-resistant and shockproof PVC
for the right end of
half-round NW 180 gutters.

Notes:
Right-hand end.
Processing instructions:
Special adhesive no. 81250 should be used for
this gutter end piece.



Item number	Material	Length (cm)	Order number	Color	Packaging
81814	PVC-U	2	104538	BB - grey	5 PCE

Clip support

Clip-on drain fitting
made of UV-resistant and shockproof PVC
for NW 180 half-round gutters and DN 125 rain-
water downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
82817	PVC-U	24	116159	BB - grey	5 PCE

HALFROUND GUTTERS

NOMINAL SIZE (NW) 180 / 5-PART

Semi-circular gutter angle 90° outside

Gutter angle 90° for outside corners made of UV-resistant and shockproof PVC for NW 180 half-round gutters.

Processing instructions:
2 clip-on connectors are required for assembly. Special adhesive no. 81250 should be used for this gutter angle.



Item number	Material	Length (cm)	Order number	Color	Packaging
81811	PVC-U	44	104529	BB - grey	8 PCE

Semi-circular gutter angle 90° inside

Gutter angle 90° for inside corners made of UV-resistant and shockproof PVC for half-round NW 180 gutters.

Processing instructions:
2 clip-on connectors are required for assembly. Special adhesive no. 81250 should be used for this gutter angle.



Item number	Material	Length (cm)	Order number	Color	Packaging
81812	PVC-U	37	104534	BB - grey	8 PCE

Gutter bracket galvanized

Galvanised gutter bracket for NW 100 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no. 81255.



Item number	Material	Length (cm)	Order number	Color	Packaging
82812	Galvanised steel	52	104709	NA - natur	20 PCE

Gutter bracket galvanized/plastic coated

Galvanised gutter bracket with plastic coating for NW 180 half-round gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no. 81255.




Item number	Material	Length (cm)	Order number	Color	Packaging
81802	Galvanised steel	55	104488	BB - grey	20 PCE

Leaf trap grid NW 150 + NW 180

Leaf trap grid for gutter sizes of NW 150 to NW 180.

Notes:
Do not use plastic leaf guards on metal-only roofs, as heat can build up in permanent sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85519	PE	200	112356	90 - black	10 PCS
	PE	300	104275	90 - black	10 PCS

BOX GUTTERS

NOMINAL SIZE (NW) 68 / 10-PART

Box gutter

NW 68 box-shaped gutter
made of UV-resistant and shockproof PVC.

Notes:
Bead height: 50 mm
Rebate height: 55 mm
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.
Floor width: 80



Item number	Material	Length (cm)	Order number	Color	Packaging
84101	PVC-U	200	105536	BA - white	8 PCS
84100	PVC-U	300	105383	BA - white	8 PCS
81101	PVC-U	200	105382	BB - grey	8 PCS
81100	PVC-U	300	105380	BB - grey	8 PCS
83501	PVC-U	200	105520	BD - brown	8 PCS
83500	PVC-U	300	105384	BD - brown	8 PCS
88611	PVC-U	200	120150	91 - anthracite	8 PCS
88612	PVC-U	300	120151	91 - anthracite	5 PCS
86501	PVC-U	200	105385	BC - dark brown	8 PCS
86500	PVC-U	300	105437	BC - dark brown	8 PCS

Box gutter cover left

Adhesive gutter end piece
made of UV-resistant and shockproof PVC
for the left end of
NW 68 box-shaped gutters

Notes:
Left end
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84113	PVC-U	1	104899	BA - white	10 PCE
81113	PVC-U	1	104239	BB - grey	10 PCE
83513	PVC-U	1	104805	BD - brown	10 PCE
86513	PVC-U	1	104350	BC - dark brown	10 PCE
88616	PVC-U	1	120153	91 - anthracite	10 PCE

Box gutter cover right

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
for the right end of
NW 68 box-shaped gutters.

Notes:
Right-hand end
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84114	PVC-U	1	104901	BA - white	10 PCE
81114	PVC-U	1	104240	BB - grey	10 PCE
83514	PVC-U	1	104812	BD - brown	10 PCE
86514	PVC-U	1	104351	BC - dark brown	10 PCE
88617	PVC-U	1	120154	91 - anthracite	10 PCE

BOX GUTTERS
NOMINAL SIZE (NW) 68 / 10-PART

Box gutter connector

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
offering expansion compensation (dilatation)
for NW 68 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84022	PVC-U	200	107349	BA - white	1 PCE
81122	PVC-U	200	107350	BB - grey	1 PCE
83522	PVC-U	200	107351	BD - brown	1 PCE
86522	PVC-U	200	107352	BC - dark brown	1 PCE

Box gutter connector

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
for NW 68 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84119	PVC-U	5	104908	BA - white	10 PCE
81119	PVC-U	5	104245	BB - grey	10 PCE
83519	PVC-U	5	104826	BD - brown	10 PCE
86519	PVC-U	5	104358	BC - dark brown	10 PCE
88618	PVC-U	5	120155	91 - anthracite	10 PCE

Box gutter screw connector

Adhesive screw socket
made of UV-resistant and shockproof PVC
for NW 68 box-shaped gutters and DN 50 down-
pipes.

Notes:
Also for box-shaped metal gutters.
Also for transitions to HT pipes.
Processing instructions:
Also suitable for box-shaped metal gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
84132	PVC-U	6	107567	BA - white	10 PCE
81132	PVC-U	6	107566	BB - grey	10 PCE
83532	PVC-U	6	107568	BD - brown	10 PCE
86532	PVC-U	6	107569	BC - dark brown	10 PCE
88568	PVC-U	6	110928	91 - anthracite	10 PCE

Box gutter drain

Adhesive clip supports
made of UV-resistant and shockproof PVC
for NW 68 box-shaped gutters and DN 50 down-
pipes.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84117	PVC-U	7	104905	BA - white	5 PCE
81117	PVC-U	7	104243	BB - grey	5 PCE
83517	PVC-U	7	104821	BD - brown	5 PCE
86517	PVC-U	7	104355	BC - dark brown	5 PCE
88615	PVC-U	7	120152	91 - anthracite	5 PCE

BOX GUTTERS

NOMINAL SIZE (NW) 68 / 10-PART

Box gutter angle 90° outside

Adhesive outside gutter angle made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
2 adhesive connectors are required for assembly.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84111	PVC-U	11	104897	BA - white	20 PCE
81111	PVC-U	11	104237	BB - grey	20 PCE
83511	PVC-U	11	104799	BD - brown	20 PCE
86511	PVC-U	11	104346	BC - dark brown	20 PCE

Box gutter angle 90° inside

Adhesive inside 90° gutter angle made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
2 adhesive connectors are required for assembly.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84112	PVC-U	11	104898	BA - white	20 PCE
81112	PVC-U	11	104238	BB - grey	20 PCE
83512	PVC-U	11	104801	BD - brown	20 PCE
86512	PVC-U	11	104348	BC - dark brown	20 PCE

Box gutter angle 135° outside

Adhesive 135° outside gutter angle made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
84141	PVC-U	11	104924	BA - white	20 PCE
81141	PVC-U	11	104322	BB - grey	20 PCE
83541	PVC-U	11	104846	BD - brown	20 PCE
86541	PVC-U	11	104368	BC - dark brown	20 PCE

Box gutter bracket galvanized/plastic coated

Galvanised and plastic-coated gutter bracket for NW 68 box-shaped gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no. 81255.



Item number	Material	Length (cm)	Order number	Color	Packaging
84102	Galvanised steel	21	104891	BA - white	20 PCE
81715	Galvanised steel	21	104463	BB - grey	20 PCE
83502	Galvanised steel	21	104793	BD - brown	20 PCE
86502	Galvanised steel	21	104342	BC - dark brown	20 PCE
88621	Galvanised steel	21	120158	91 - anthracite	20 PCE

BOX GUTTERS

NOMINAL SIZE (NW) 68 / 10-PART

Box gutter bracket support plastic

Fascia board box-shaped gutter bracket
made of UV-resistant and shockproof PVC
for NW 68 box-shaped gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
81103	PVC-U	9	104233	BA - white	20 PCE
81102	PVC-U	9	104232	BB - grey	20 PCE
81104	PVC-U	9	104234	BD - brown	20 PCE
86504	PVC-U	9	104344	BC - dark brown	20 PCE
88619	PVC-U	9	120156	91 - anthracite	20 PCE



Box gutter bracket support plastic adjustable 9 - 30°

Fascia board box-shaped gutter bracket
made of UV-resistant and shockproof PVC
for NW 68 box-shaped gutters,
adjustable from 9 to 30°.

Notes:
Adjustable from 9 - 30°.

Item number	Material	Length (cm)	Order number	Color	Packaging
84139	PVC-U	10	104923	BA - white	20 PCE
81139	PVC-U	10	104269	BB - grey	20 PCE
83539	PVC-U	10	104843	BD - brown	20 PCE
86539	PVC-U	10	104366	BC - dark brown	20 PCE
88620	PVC-U	10	120157	91 - anthracite	20 PCE



BOX GUTTERS

NOMINAL SIZE (NW) 83 / 8-PART

Box gutter

NW 83 box-shaped gutter
made of UV-resistant and shockproof PVC.

Notes:
Bead height: 60 mm
Rebate height: 65 mm
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.
Floor width: 100



Item number	Material	Length (cm)	Order number	Color	Packaging
88001	PVC-U	200	105541	BB - grey	4 PCS
88000	PVC-U	300	105471	BB - grey	4 PCS
83401	PVC-U	200	105532	BD - brown	4 PCS
83400	PVC-U	300	105473	BD - brown	4 PCS

Box gutter cover left

Adhesive gutter end piece
made of UV-resistant and shockproof PVC
for the left end of
NW 83 box-shaped gutters

Notes:
Left end
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
88013	PVC-U	2	104505	BB - grey	10 PCE
83413	PVC-U	2	104869	BD - brown	10 PCE

Box gutter cover right

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
for the right end of
NW 83 box-shaped gutters.

Notes:
Right-hand end
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
88014	PVC-U	2	104506	BB - grey	10 PCE
83414	PVC-U	2	104871	BD - brown	10 PCE

Box gutter connector

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
offering expansion compensation (dilatation)
for NW 83 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
88022	PVC-U	200	107353	BB - grey	1 PCE
83422	PVC-U	200	107354	BD - brown	1 PCE

BOX GUTTERS

NOMINAL SIZE (NW) 83 / 8-PART

Box gutter connector

Adhesive gutter connecting piece made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
88019	PVC-U	5	104507	BB - grey	10 PCE
83419	PVC-U	5	104879	BD - brown	10 PCE

Box gutter screw connector

Adhesive screw socket made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters and DN 75 down-pipes.

Notes:
Also for box-shaped metal gutters.
Also for transitions to HT pipes.
Processing instructions:
Also suitable for box-shaped metal gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
84432	PVC-U	6	106616	BA - white	10 PCE
82032	PVC-U	6	106717	BB - grey	10 PCE
83632	PVC-U	6	106715	BD - brown	10 PCE
86232	PVC-U	6	106716	BC - dark brown	10 PCE
88564	PVC-U	6	110923	91 - anthracite	10 PCE

Box gutter angle 90° outside

Adhesive 90° outside gutter angle made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters.

Processing instructions:
2 adhesive connectors are required for assembly.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
88011	PVC-U	29	104747	BB - grey	20 PCE
83411	PVC-U	29	104862	BD - brown	20 PCE

Box gutter angle 90° inside

Adhesive 90° inside gutter angle made of UV-resistant and shockproof PVC for NW 83-shaped box-shaped gutters.

Processing instructions:
2 adhesive connectors are required for assembly.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
88012	PVC-U	25	104749	BB - grey	20 PCE
83412	PVC-U	25	104865	BD - brown	20 PCE

BOX GUTTERS

NOMINAL SIZE (NW) 83 / 8-PART

Box gutter bracket galvanized/plastic coated

Galvanised and plastic-coated gutter bracket for NW 83 box-shaped gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no. 81255.

Item number	Material	Length (cm)	Order number	Color	Packaging
88002	Galvanised steel	26	104504	BB - grey	20 PCE
83402	Galvanised steel	26	104859	BD - brown	20 PCE



Box gutter bracket support plastic

Fascia board box-shaped gutter bracket made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
88008	PVC-U	11	107976	BB - grey	20 PCE
	PVC-U	11	107978	BD - brown	20 PCE



Box gutter bracket support plastic adjustable 9 - 30°

Fascia board box-shaped gutter bracket made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters, adjustable from 9 to 30°.

Notes:
Adjustable from 9 - 30°.

Item number	Material	Length (cm)	Order number	Color	Packaging
88039	PVC-U	10	116914	BB - grey	10 PCE
83439	PVC-U	10	116915	BD - brown	10 PCE



BOX GUTTERS
NOMINAL SIZE (NW) 115 / 6-PART

Box gutter

NW 115 box-shaped gutter
made of UV-resistant and shockproof PVC.

Notes:
Bead height: 70 mm
Rebate height: 85 mm
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.
Floor width: 160



Item number	Material	Length (cm)	Order number	Color	Packaging
86001	PVC-U	200	105539	BB - grey	4 PCS
86000	PVC-U	300	105538	BB - grey	4 PCS

Box gutter cover left

Adhesive gutter end piece
made of UV-resistant and shockproof PVC
for the left end of
NW 115 box-shaped gutters

Notes:
Left end
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
86013	PVC-U	2	104286	BB - grey	10 PCE

Box gutter cover right

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
for the right end of
NW 115 box-shaped gutters.

Notes:
Right-hand end
Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
86014	PVC-U	2	104288	BB - grey	10 PCE

Gutter connector

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
offering expansion compensation (dilatation)
for NW 115 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
86022	PVC-U	200	107356	BB - grey	1 PCE

Box gutter connector

Adhesive gutter connecting piece
made of UV-resistant and shockproof PVC
for NW 115 box-shaped gutters.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
86019	PVC-U	6	104247	BB - grey	10 PCE

BOX GUTTERS

NOMINAL SIZE (NW) 115 / 6-PART

Box gutter screw connector

Adhesive screw socket
made of UV-resistant and shockproof PVC
for NW 115 box-shaped gutters and DN 100 down-
pipes.

Notes:
Also for box-shaped metal gutters.
Also for transitions to HT pipes.
Processing instructions:
Also suitable for box-shaped metal gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
81532	PVC-U	6	107358	BB - grey	10 PCE

Box gutter drain

Adhesive clip supports
made of UV-resistant and shockproof PVC
for NW 115 box-shaped gutters and DN 85 down-
pipes.

Processing instructions:
Special adhesive no. 81250 should be used for
all box-shaped gutter components.




Item number	Material	Length (cm)	Order number	Color	Packaging
86017	PVC-U	11	104294	BB - grey	5 PCE

Box gutter angle 90° outside

Adhesive 90° outside gutter angle
made of UV-resistant and shockproof PVC
for NW 83 box-shaped gutters.

Processing instructions:
2 adhesive connectors are required for
assembly.
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
86011	PVC-U	31	104282	BB - grey	10 PCE

Box gutter angle 90° inside

Adhesive 90° inside gutter angle
made of UV-resistant and shockproof PVC
for NW 115-shaped box-shaped gutters.

Processing instructions:
2 adhesive connectors are required for
assembly.
Special adhesive no. 81250 should be used for
all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
86012	PVC-U	35	104285	BB - grey	10 PCE

Box gutter bracket galvanized/plastic coated

Galvanised and plastic-coated gutter bracket
for NW 115 box-shaped gutters.

Processing instructions:
Suitable gutter-bracket bending pliers no.
81255.



Item number	Material	Length (cm)	Order number	Color	Packaging
86002	Galvanised steel	30	104279	BB - grey	20 PCE

GUTTER ACCESSORIES

Adhesive for PVC tube

Special dissolving adhesive for the quick and reliable bonding of molded parts made of rigid PVC with good temperature resistance and good UV resistance.

Notes:
Tube 180 g
Processing instructions:
Transparent and fast-setting.
For bonding gaps < 0.1 mm.



Item number	Material	Length (cm)	Order number	Color	Packaging
81250		19	116916		30 PCE

Gutter bracket bending pliers

Bending pliers for gutter brackets



Item number	Material	Length (cm)	Order number	Color	Packaging
81255	Galvanised steel	200	104949	J3 - fir green	1 PCE

Gutter repair tape

Repair tape for
gluing to half-round and box-shaped gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
82222	PVC-U	250	106951	90 - black	1 PCS

GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 50

Rainwater downpipe

Rainwater downpipe including plug socket
made of UV and shock-resistant PVC
for DN 50 roof gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84015	PVC-U	100	104913	BA - white	10 PCS
84115	PVC-U	200	104902	BA - white	10 PCS
84915	PVC-U	250	104724	BA - white	10 PCS
82115	PVC-U	100	104700	BB - grey	10 PCS
81115	PVC-U	200	104241	BB - grey	10 PCS
83415	PVC-U	100	104872	BD - brown	10 PCS
83515	PVC-U	200	104817	BD - brown	10 PCS
86215	PVC-U	100	104299	BC - dark brown	10 PCS
86515	PVC-U	200	104352	BC - dark brown	10 PCS
	PVC-U	250	105099	BC - dark brown	10 PCS
88565	PVC-U	200	110925	91 - anthracite	10 PCS
88566	PVC-U	250	110926	91 - anthracite	10 PCS



Rainwater downpipe bend 45°

45° pipe elbow
made of UV and shock-resistant PVC
for DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84116	PVC-U	12	104904	BA - white	10 PCE
81900	PVC-U	12	104674	BB - grey	10 PCE
83516	PVC-U	12	104818	BD - brown	10 PCE
86516	PVC-U	12	104354	BC - dark brown	10 PCE
88567	PVC-U	12	110927	91 - anthracite	10 PCE



Rainwater downpipe bend 87°

87° pipe elbow
made of UV and shock-resistant PVC
for DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84110	PVC-U	12	104895	BA - white	10 PCE
81901	PVC-U	12	104675	BB - grey	10 PCE
83416	PVC-U	12	104875	BD - brown	10 PCE
86816	PVC-U	12	104386	BC - dark brown	10 PCE
88572	PVC-U	14	110932	91 - anthracite	10 PCE



Pipe socket to stuck

Pipe plug socket
made of UV and shock-resistant PVC
for DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84134	PVC-U	8	104922	BA - white	945 PCE
81134	PVC-U	8	104268	BB - grey	945 PCE
83534	PVC-U	8	104839	BD - brown	945 PCE
86534	PVC-U	8	104363	BC - dark brown	945 PCE
88569	PVC-U	8	110929	91 - anthracite	945 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 50

Arch piece

Moveable arch piece
made of UV-resistant and shockproof PVC
for DN 50 rainwater downpipes.

Notes:
The connection piece with an elbow produces a
flexible 22° elbow. Each additional elbow
extends the angle by up to 23°.



Item number	Material	Length (cm)	Order number	Color	Packaging
81951	PVC-U	6	107640	BA - white	10 PCE
	PVC-U	6	107641	BB - grey	10 PCE
	PVC-U	6	107642	BC - dark brown	10 PCE

Connector

Connection piece
for the flexible pipe bend
made of UV-resistant and impact-resistant PVC
for rainwater downpipes DN 50.

Notes:
The connection piece with an elbow produces a
flexible 22° elbow. Each additional elbow
extends the angle by up to 23°.



Item number	Material	Length (cm)	Order number	Color	Packaging
81950	PVC-U	6	107638	BC - dark brown	10 PCE
	PVC-U	6	107637	BB - grey	10 PCE
	PVC-U	6	107636	BA - white	10 PCE

Pipe clamp with pin galvanized/plastic coated

Pipe clamp with spike
for DN 50 rainwater downpipes.

Notes:
Pin length: 110 mm.



Item number	Material	Length (cm)	Order number	Color	Packaging
84118	Galvanised steel	11	104906	BA - white	25 PCE
81118	Galvanised steel	11	104244	BB - grey	25 PCE
83518	Galvanised steel	11	104824	BD - brown	25 PCE
86518	Galvanised steel	11	104357	BC - dark brown	25 PCE

Pipe clamp without pin galvanized/plastic coated

The PROTEKTOR pipe clamp with M8 thread
and hexagon nut for screw pins
used in DN 50 rainwater downpipes.

Notes:
With thread for hanger bolts/screw pins.



Item number	Material	Length (cm)	Order number	Color	Packaging
84108	Galvanised steel	7	104894	BA - white	25 PCE
81108	Galvanised steel	7	104236	BB - grey	25 PCE
82118	Galvanised steel	7	104702	BD - brown	25 PCE
86218	Galvanised steel	7	104304	BC - dark brown	25 PCE

Screw pin, thread 8 mm

Screw pin
for NW 50 and NW 75 pipe clamps.



Item number	Material	Length (cm)	Order number	Color	Packaging
81318	Galvanised steel	8	104954	NA - natur	25 PCE
81317	Galvanised steel	14	104953	NA - natur	25 PCE
81315	Galvanised steel	20	104951	NA - natur	25 PCE

GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 50

Pipe clamp without pin galvanized/plastic coated

Wooden pipe clamps with screw mounting holes for DN 50 rainwater downpipes.

Notes:
Drill hole for mounting with suitable screws.

Item number	Material	Length (cm)	Order number	Color	Packaging
84308	Galvanised steel	8	105852	BA - white	25 PCE
83508	Galvanised steel	8	105905	BD - brown	25 PCE
86408	Galvanised steel	8	105853	BC - dark brown	25 PCE
81418	Galvanised steel	8	105322	NA - natur	25 PCE



Clip pipe clamp

Clip pipe clamp made of UV and shock-resistant PVC for DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84128	PVC-U	6	104919	BA - white	25 PCE
81128	PVC-U	6	104266	BB - grey	25 PCE
83528	PVC-U	6	104835	BD - brown	25 PCE
86228	PVC-U	6	104305	BC - dark brown	25 PCE
88563	PVC-U	6	110922	91 - anthracite	25 PCE



Transition rainwater/canal pipe

Transition piece made of UV-resistant and shockproof PVC for connecting DN 50 rainwater downpipes to drainpipes (KG pipe), 110 x 3,2 mm DN 100.

Item number	Material	Length (cm)	Order number	Color	Packaging
84029	PVC-U	13	104918	BA - white	50 PCE
81129	PVC-U	13	104267	BB - grey	50 PCE
83529	PVC-U	13	104837	BD - brown	50 PCE
86529	PVC-U	13	104362	BC - dark brown	50 PCE



Rainwater downpipe off flap

Downpipe flaps made of UV and shock-resistant PVC for DN 50 rainwater downpipes.

Notes:
Length: 400 mm

Item number	Material	Length (cm)	Order number	Color	Packaging
84126	PVC-U	31	104917	BA - white	20 PCE
81126	PVC-U	31	104265	BB - grey	20 PCE
83526	PVC-U	31	104833	BD - brown	20 PCE
86526	PVC-U	31	104361	BC - dark brown	20 PCE



Water drain off

Water spouts made of UV and shock-resistant PVC for DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84123	PVC-U	34	104911	BA - white	50 PCE
81123	PVC-U	34	104320	BB - grey	50 PCE
83523	PVC-U	34	104831	BD - brown	50 PCE
86523	PVC-U	34	104564	BC - dark brown	50 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 50

Rainwater downpipe branch 45°

45° pipe junction
made of UV and shock-resistant PVC
for DN 50 to DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84180	PVC-U	18	104926	BA - white	20 PCE
81880	PVC-U	18	104609	BB - grey	20 PCE
83580	PVC-U	18	115748	BD - brown	20 PCE
86535	PVC-U	18	104364	BC - dark brown	20 PCE



Rainwater downpipe branch 87°

87° pipe junction
made of UV and shock-resistant PVC
for DN 50 to DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84055	PVC-U	18	104921	BA - white	20 PCE
81890	PVC-U	18	104673	BB - grey	20 PCE
83055	PVC-U	18	115749	BD - brown	20 PCE
86155	PVC-U	18	104264	BC - dark brown	20 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 75

Rainwater downpipe

Rainwater downpipe including plug socket
made of UV and shock-resistant PVC
for DN 75 roof gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84815	PVC-U	100	104714	BA - white	5 PCS
84125	PVC-U	200	104916	BA - white	5 PCS
84415	PVC-U	250	104377	BA - white	5 PCS
82315	PVC-U	100	104627	BB - grey	5 PCS
82015	PVC-U	200	104689	BB - grey	5 PCS
81015	PVC-U	400	104221	BB - grey	5 PCS
83715	PVC-U	100	104857	BD - brown	5 PCS
83615	PVC-U	200	104873	BD - brown	5 PCS
86715	PVC-U	100	104381	BC - dark brown	5 PCS
86115	PVC-U	200	104255	BC - dark brown	5 PCS
86124	PVC-U	250	104258	BC - dark brown	5 PCS
88573	PVC-U	100	110947	91 - anthracite	5 PCS
88560	PVC-U	200	110919	91 - anthracite	5 PCS
88561	PVC-U	250	110920	91 - anthracite	5 PCS



Rainwater downpipe bend 45°

45° pipe elbow
made of UV and shock-resistant PVC
for DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84402	PVC-U	13	104374	BA - white	10 PCE
81902	PVC-U	13	104677	BB - grey	10 PCE
83616	PVC-U	13	104876	BD - brown	10 PCE
86716	PVC-U	13	104383	BC - dark brown	10 PCE
88570	PVC-U	13	110930	91 - anthracite	10 PCE



Rainwater downpipe bend 60°

60° pipe elbow
made of UV and shock-resistant PVC
for DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84416	PVC-U	14	104380	BA - white	10 PCE
82016	PVC-U	14	104691	BB - grey	10 PCE
83716	PVC-U	14	104861	BD - brown	10 PCE
86616	PVC-U	14	104371	BC - dark brown	10 PCE
88575	PVC-U	14	114030	91 - anthracite	10 PCE



Rainwater downpipe bend 80°

80° pipe elbow
made of UV and shock-resistant PVC
for DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84410	PVC-U	15	104376	BA - white	5 PCE
81010	PVC-U	15	104218	BB - grey	5 PCE
83610	PVC-U	15	104863	BD - brown	5 PCE
86016	PVC-U	15	104291	BC - dark brown	5 PCE
88574	PVC-U	15	111484	91 - anthracite	5 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 75

Pipe socket to stuck

Pipe plug socket
made of UV and shock-resistant PVC
for DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84434	PVC-U	10	104430	BA - white	308 PCE
81034	PVC-U	10	104228	BB - grey	308 PCE
83634	PVC-U	10	104787	BD - brown	308 PCE
86134	PVC-U	10	104261	BC - dark brown	308 PCE
88562	PVC-U	10	110921	91 - anthracite	308 PCE



Pipe clamp with pin galvanized/plastic coated

Pipe clamp with spike
for DN 75 rainwater downpipe.

Notes:
Pin length: 110 mm.

Item number	Material	Length (cm)	Order number	Color	Packaging
84318	Galvanised steel	24	104367	BA - white	25 PCE
82018	Galvanised steel	24	104694	BB - grey	25 PCE
83618	Galvanised steel	24	104880	BD - brown	25 PCE
86118	Galvanised steel	24	104257	BC - dark brown	25 PCE
88609	Galvanised steel	24	114028	91 - anthracite	25 PCE



Pipe clamp without pin galvanized/plastic coated

The PROTEKTOR pipe clamp with M8 thread
and hexagon nut for screw pins
used in DN 75 rainwater downpipes.

Notes:
With thread for hanger bolts/screw pins.

Item number	Material	Length (cm)	Order number	Color	Packaging
84418	Galvanised steel	10	104392	BA - white	25 PCE
81208	Galvanised steel	10	104343	BB - grey	25 PCE
82618	Galvanised steel	10	104668	BD - brown	25 PCE
86708	Galvanised steel	10	104373	BC - dark brown	25 PCE
88610	Galvanised steel	10	114029	91 - anthracite	25 PCE



Screw pin, thread 8 mm

Screw pin
for NW 50 and NW 75 pipe clamps.

Item number	Material	Length (cm)	Order number	Color	Packaging
81318	Galvanised steel	8	104954	NA - natur	25 PCE
81317	Galvanised steel	14	104953	NA - natur	25 PCE
81315	Galvanised steel	20	104951	NA - natur	25 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 75

Pipe clamp without pin galvanized/plastic coated

Wooden pipe clamps with screw mounting holes for DN 75 rainwater downpipes.

Notes:
Drill hole for mounting with suitable screws.

Item number	Material	Length (cm)	Order number	Color	Packaging
84508	Galvanised steel	10	105854	BA - white	25 PCE
83708	Galvanised steel	10	105906	BD - brown	25 PCE
86608	Galvanised steel	10	105855	BC - dark brown	25 PCE
81419	Galvanised steel	10	105742	NA - natur	25 PCE



Clip pipe clamp

Clip pipe clamp made of UV and shock-resistant PVC for DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84428	PVC-U	9	104406	BA - white	25 PCE
82028	PVC-U	9	104698	BB - grey	25 PCE
83728	PVC-U	9	104874	BD - brown	25 PCE
86728	PVC-U	9	104385	BC - dark brown	25 PCE
88571	PVC-U	9	110931	91 - anthracite	25 PCE



Transition rainwater/canal pipe

Transition pieces made of UV-resistant and shockproof PVC for connecting DN 75 rainwater downpipes to drainpipes (KG pipe), 110 x 3.2 mm DN 100.

Item number	Material	Length (cm)	Order number	Color	Packaging
81029	PVC-U	13	104300	BB - grey	50 PCE
83629	PVC-U	13	104888	BD - brown	50 PCE
86129	PVC-U	13	104522	BC - dark brown	50 PCE



Pipe spline

Push-fit pipe spline made of UV and shock-resistant PVC for DN 75 rainwater pipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81027	PVC-U	46	104298	BB - grey	20 PCE

Rainwater downpipe off flap

Downpipe flaps made of UV and shock-resistant PVC for DN 75 rainwater downpipes.

Notes:
Length: 400 mm

Item number	Material	Length (cm)	Order number	Color	Packaging
84426	PVC-U	40	104402	BA - white	20 PCE
81026	PVC-U	40	104226	BB - grey	20 PCE
83626	PVC-U	40	104885	BD - brown	20 PCE
86126	PVC-U	40	104259	BC - dark brown	20 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 75

Rainwater downpipe branch 45°

45° pipe junction
made of UV and shock-resistant PVC
for DN 75 to DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84440	PVC-U	31	104458	BA - white	25 PCE
81845	PVC-U	31	104574	BB - grey	25 PCE
83640	PVC-U	31	104822	BD - brown	25 PCE



Rainwater downpipe branch 60°

60° pipe junction
made of UV and shock-resistant PVC
for DN 75 to DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84441	PVC-U	24	115743	BA - white	25 PCE
81801	PVC-U	24	115737	BB - grey	25 PCE
83636	PVC-U	24	115741	BD - brown	25 PCE
86135	PVC-U	24	115745	BC - dark brown	25 PCE



Reducer pipe

Reducer
made of UV and shock-resistant PVC
for DN 75 to DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84721	PVC-U	15	104710	BA - white	10 PCE
81710	PVC-U	15	104452	BB - grey	10 PCE
83220	PVC-U	15	104834	BD - brown	10 PCE
86110	PVC-U	15	104254	BC - dark brown	10 PCE



Leaf trap basket

Leaf trap basket
for NW 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
85415	PVC-U	8	104271	BB - grey	50 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 85

Rainwater downpipe

Rainwater downpipe including plug socket
made of UV and shock-resistant PVC
for DN 85 gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
82415	PVC-U	100	104631	BB - grey	5 PCS
82215	PVC-U	200	104610	BB - grey	5 PCS
81215	PVC-U	400	104489	BB - grey	5 PCS
83215	PVC-U	100	104820	BD - brown	5 PCS
83115	PVC-U	200	104811	BD - brown	5 PCS



Rainwater downpipe bend 45°

45° pipe elbow
made of UV and shock-resistant PVC
for DN 85 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81904	PVC-U	16	104678	BB - grey	10 PCE
83116	PVC-U	16	104815	BD - brown	10 PCE



Rainwater downpipe bend 60°

60° pipe elbow
made of UV and shock-resistant PVC
for DN 85 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
82216	PVC-U	15	104611	BB - grey	10 PCE
83816	PVC-U	15	104890	BD - brown	10 PCE



Rainwater downpipe bend 80°

80° pipe elbow
made of UV and shock-resistant PVC
for DN 85 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81210	PVC-U	21	104476	BB - grey	5 PCE
83110	PVC-U	21	104800	BD - brown	5 PCE



Pipe socket to stuck

Pipe plug socket
made of UV and shock-resistant PVC
for DN 85 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81234	PVC-U	12	104596	BB - grey	220 PCE
83134	PVC-U	12	104792	BD - brown	220 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 85

Pipe clamp with pin galvanized/plastic coated

Pipe clamp with spike
for DN 85 rainwater downpipe.

Notes:
Pin length: 110 mm.



Item number	Material	Length (cm)	Order number	Color	Packaging
82218	Galvanised steel	25	104622	BB - grey	25 PCE
83118	Galvanised steel	25	104739	BD - brown	25 PCE

Transition rainwater/canal pipe

Transition pieces
made of UV-resistant and shockproof PVC
for connecting DN 85 rainwater downpipes to DN
100
drainpipes (KG pipe), 110 x 3.2 mm.



Item number	Material	Length (cm)	Order number	Color	Packaging
81229	PVC-U	13	104593	BB - grey	30 PCE
83129	PVC-U	13	104775	BD - brown	30 PCE

Pipe spline

Push-fit pipe spline
made of UV and shock-resistant PVC
for DN 85 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81227	PVC-U	46	104588	BB - grey	15 PCE

Rainwater downpipe branch 60°

60° pipe junction
made of UV-resistant and shockproof PVC
for DN 85 to DN 85 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81830	PVC-U	24	118433	BB - grey	25 PCE
83135	PVC-U	24	104795	BD - brown	25 PCE

SALE

Reducer pipe

Reducer
made of UV and shock-resistant PVC
for DN 85 to DN 75 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81711	PVC-U	16	104454	BB - grey	10 PCE
83218	PVC-U	16	104825	BD - brown	10 PCE

GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 85

Leaf trap basket

Leaf trap basket
for DN 85 and DN 100 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
85416	PVC-U	8	104272	BB - grey	50 PCE

GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 100

Rainwater downpipe

Rainwater downpipe including plug socket
made of UV and shock-resistant PVC
for DN 100 roof gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84715	PVC-U	100	104670	BA - white	5 PCS
84615	PVC-U	200	104614	BA - white	5 PCS
82615	PVC-U	100	104666	BB - grey	5 PCS
82515	PVC-U	200	104646	BB - grey	5 PCS
81515	PVC-U	400	104337	BB - grey	5 PCS
83315	PVC-U	100	104848	BD - brown	5 PCS
83015	PVC-U	200	104737	BD - brown	5 PCS
86915	PVC-U	100	104387	BC - dark brown	5 PCS
86315	PVC-U	200	104311	BC - dark brown	5 PCS



Rainwater downpipe bend 30°

30° pipe elbow
made of UV and shock-resistant PVC
for DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84616	PVC-U	17	104615	BA - white	10 PCE
81516	PVC-U	16	104339	BB - grey	10 PCE
83024	PVC-U	17	104764	BD - brown	10 PCE



Rainwater downpipe bend 45°

45° pipe elbow
made of UV and shock-resistant PVC
for DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84706	PVC-U	18	104661	BA - white	10 PCE
81906	PVC-U	18	104680	BB - grey	10 PCE
83016	PVC-U	18	104740	BD - brown	10 PCE
86916	PVC-U	18	104388	BC - dark brown	10 PCE



Rainwater downpipe bend 60°

60° pipe elbow
made of UV and shock-resistant PVC
for DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84716	PVC-U	17	104672	BA - white	10 PCE
82516	PVC-U	17	104648	BB - grey	10 PCE
83916	PVC-U	17	104896	BD - brown	10 PCE
86216	PVC-U	17	104303	BC - dark brown	10 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 100

Rainwater downpipe bend 80°

80° pipe elbow
made of UV and shock-resistant PVC
for DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81910	PVC-U	20	104682	BB - grey	5 PCE



Pipe socket to stuck

Pipe plug socket
made of UV and shock-resistant PVC
for DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84634	PVC-U	13	104638	BA - white	128 PCE
81534	PVC-U	13	104446	BB - grey	128 PCE
83034	PVC-U	13	104771	BD - brown	128 PCE
86334	PVC-U	13	104327	BC - dark brown	128 PCE



Pipe clamp with pin galvanized/plastic coated

Pipe clamp with spike
for DN 100 rainwater downpipe.

Notes:
Pin length: 110 mm.

Item number	Material	Length (cm)	Order number	Color	Packaging
84618	Galvanised steel	27	104617	BA - white	25 PCE
82518	Galvanised steel	27	104651	BB - grey	25 PCE
83018	Galvanised steel	27	104751	BD - brown	25 PCE
86318	Galvanised steel	27	104313	BC - dark brown	25 PCE



Pipe clamp without pin galvanized/plastic coated

The PROTEKTOR pipe clamp with M10 thread
and hexagon nut for screw pins
used in DN 100 rainwater downpipes.

Notes:
With thread for hanger bolts/screw pins.

Item number	Material	Length (cm)	Order number	Color	Packaging
84608	Galvanised steel	14	104598	BA - white	25 PCE
81508	Galvanised steel	14	104325	BB - grey	25 PCE
83308	Galvanised steel	14	104842	BD - brown	25 PCE
86308	Galvanised steel	14	104309	BC - dark brown	25 PCE



Screw pin, thread M10

Screw pin
for NW 100 and NW 125 pipe clamps.

Item number	Material	Length (cm)	Order number	Color	Packaging
81314	Galvanised steel	14	118646		50 PCE
81319	Galvanised steel	20	104955	NA - natur	25 PCE
81316	Galvanised steel	29	104952	NA - natur	25 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 100

Transition rainwater/canal pipe

Transition pieces
made of UV-resistant and shockproof PVC
for connecting DN 100 rainwater downpipes to
drainpipes (KG pipe), 110 x 3.2 mm DN 100.

Item number	Material	Length (cm)	Order number	Color	Packaging
84629	PVC-U	13	104632	BA - white	60 PCE
81529	PVC-U	13	104438	BB - grey	60 PCE
83029	PVC-U	13	104768	BD - brown	60 PCE
86329	PVC-U	13	104556	BC - dark brown	60 PCE



Transition piece

Transition piece
made of UV and shock-resistant PVC
for connecting roof gullies to DN 100 rainwater
pipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81025	PVC-U	16	104295	BB - grey	30 PCE



Pipe spline

Push-fit pipe spline
made of UV and shock-resistant PVC
for DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81527	PVC-U	46	104423	BB - grey	12 PCE
83027	PVC-U	46	104766	BD - brown	12 PCE



Rainwater downpipe branch 45°

45° pipe junction
made of UV and shock-resistant PVC
for DN 100 to DN 50 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84640	PVC-U	32	104647	BA - white	15 PCE
81840	PVC-U	32	104573	BB - grey	15 PCE



Rainwater downpipe branch 60°

60° pipe junction
made of UV and shock-resistant PVC
for DN 100 to DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81805	PVC-U	24	115738	BB - grey	15 PCE
83650	PVC-U	24	115742	BD - brown	15 PCE
SALE 86335	PVC-U	24	104331	BC - dark brown	15 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 100

Rainwater downpipe branch 60°

60° pipe junction
made of UV and shock-resistant PVC
for DN 100 to DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84606	PVC-U	24	115744	BA - white	12 PCE
81806	PVC-U	24	115739	BB - grey	12 PCE
83150	PVC-U	24	115740	BD - brown	12 PCE
86935	PVC-U	24	115747	BC - dark brown	12 PCE



Reducer pipe

Reducer
made of UV and shock-resistant PVC
for DN 100 to DN 75 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
84720	PVC-U	16	104697	BA - white	10 PCE
81712	PVC-U	16	104457	BB - grey	10 PCE
83221	PVC-U	16	104836	BD - brown	10 PCE
86310	PVC-U	16	104310	BC - dark brown	10 PCE



Reducer pipe

Reducer
made of UV and shock-resistant PVC
for DN 100 to DN 85 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81713	PVC-U	16	104460	BB - grey	10 PCE
83219	PVC-U	16	104829	BD - brown	10 PCE



Leaf trap basket

Leaf trap basket
for DN 85 and DN 100 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
85416	PVC-U	8	104272	BB - grey	50 PCE



GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 125

Rainwater downpipe

Downpipe including plug socket
made of UV and shock-resistant PVC
for DN 125 roof gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
81815	PVC-U	400	104540	BB - grey	3 PCS



Rainwater downpipe bend 45°

45° pipe elbow
made of UV and shock-resistant PVC
for DN 125 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
81908	PVC-U	21	104681	BB - grey	5 PCE



Rainwater downpipe bend 60°

60° pipe elbow
made of UV and shock-resistant PVC
for DN 125 rainwater downpipes.

Item number	Material	Length (cm)	Order number	Color	Packaging
82816	PVC-U	23	104712	BB - grey	5 PCE



Pipe socket to stuck

Pipe plug socket
made of UV and shock-resistant PVC
for DN 125 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
81834	PVC-U	16	107856	BB - grey	63 PCE



Pipe clamp with pin galvanized/plastic coated

Pipe clamp with spike
for DN 125 rainwater downpipes.

Notes:
Pin length: 110 mm.



Item number	Material	Length (cm)	Order number	Color	Packaging
82818	Galvanised steel	27	104715	BB - grey	25 PCE

GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 125

Pipe clamp without pin galvanized

The PROTEKTOR pipe clamp with M10 thread and hexagon nut for screw pins used in DN 125 rainwater downpipes.

Notes:
With thread for hanger bolts/screw pins.



Item number	Material	Length (cm)	Order number	Color	Packaging
82918	Galvanised steel	10	104727	NA - natur	25 PCE

Screw pin, thread M10

Screw pin for NW 100 and NW 125 pipe clamps.



Item number	Material	Length (cm)	Order number	Color	Packaging
81314	Galvanised steel	14	118646		50 PCE
81319	Galvanised steel	20	104955	NA - natur	25 PCE
81316	Galvanised steel	29	104952	NA - natur	25 PCE

Pipe spline

Push-fit pipe spline made of UV and shock-resistant PVC for DN 125 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81827	PVC-U	52	104567	BB - grey	8 PCE

Rainwater downpipe branch 60°

60° pipe junction made of UV and shock-resistant PVC for DN 125 to DN 100 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81808	PVC-U	46	104528	BB - grey	6 PCE

Rainwater downpipe branch 60°

60° pipe junction made of UV and shock-resistant PVC for DN 125 to DN 125 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81807	PVC-U	46	104526	BB - grey	5 PCE

GUTTER PIPES AND ACCESSORIES

NOMINAL DIAMETER (DN) 125

Reducer pipe

Reducer
made of UV and shock-resistant PVC
for DN 125 to DN 100 rainwater downpipes.



Item number	Material	Length (cm)	Order number	Color	Packaging
81714	PVC-U	18	104462	BB - grey	30 PCE

GUTTER PIPES AND ACCESSORIES

ROOFING SET / DOWNPIPE SET

Rainwater downpipe set for wintergarden

Downpipe sets for sunrooms
made of UV and shock-resistant PVC
for DN 50 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84000	PVC-U	200	104912	BA - white	1 PCE
86600	PVC-U	200	105379	BC - dark brown	1 PCE
86602	PVC-U	200	110903	91 - anthracite	1 PCE



Rainwater downpipe set for wintergarden

Downpipe sets for sunrooms
made of UV and shock-resistant PVC
for DN 75 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84400	PVC-U	250	104370	BA - white	1 PCE
86601	PVC-U	250	105381	BC - dark brown	1 PCE
86603	PVC-U	250	110904	91 - anthracite	1 PCE



CARPORT GUTTERS

Carport gutter

Non-perforated carport gutter
made of UV-resistant and shockproof PVC.
Width: 115 mm
Height: 60 mm
Leg width: 40 mm

Notes:
Floor width: 115 mm
Processing instructions:
The minimum distance between perforations is 20 mm.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
SALE 82600	PVC-U	298	105465	BD - brown	1 PCS
	PVC-U	331	105464	BD - brown	1 PCS

Carport gutter punched

Perforated carport gutter
made of UV-resistant and shockproof PVC.
Width: 115 mm
Height: 60 mm
Leg width: 40 mm

Notes:
Floor width: 115 mm
The hole diameter of the drain is 24 mm.
Processing instructions:
Standard perforations 24 mm.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
SALE 82603	PVC-U	331	105524	BD - brown	1 PCS

Carport gutter endpiece

Carport gutter end piece
made of UV-resistant and shockproof PVC.
Width: 115 mm

Notes:
Floor width: 115 mm
Processing instructions:
Right and left gutter end.
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
82613	PVC-U	12	104664	BD - brown	10 PCE

Carport gutter expansion connector

Carport gutter expansion connector
made of UV-resistant and shockproof PVC.
Width: 115 mm

Notes:
Floor width: 115 mm
Processing instructions:
Special adhesive no. 81250 should be used for all box-shaped gutter components.



Item number	Material	Length (cm)	Order number	Color	Packaging
82620	PVC-U	21	104704	BD - brown	14 PCE

Box gutter screw connector

Box-shaped gutter screw socket
made of UV-resistant and shockproof PVC
for NW 83 box-shaped gutters to DN 75 down-pipes.

Notes:
Also for box-shaped metal gutters.
Also for transitions to HT pipes.
Processing instructions:
Also suitable for box-shaped metal gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
83632	PVC-U	6	106715	BD - brown	10 PCE

Box gutter screw connector

box-shaped gutter screw socket
made of UV-resistant and shockproof PVC
for NW 83 box-shaped gutters to DN 100 down-
pipes,

Notes:
Also for box-shaped metal gutters.
Also for transitions to HT pipes.
Processing instructions:
Also suitable for box-shaped metal gutters.




Item number	Material	Length (cm)	Order number	Color	Packaging
83132	PVC-U	11	107359	BD - brown	10 PCE

LEAF TRAPS

Leaf trap grid NW 100 + NW 125

Leaf trap grid
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85518	PE	200	112357	90 - black	10 PCS
	PE	300	104274	90 - black	10 PCS

Leaf trap grid NW 100 + NW 125

Leaf trap grid on the roll,
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85520	PE	300	117415	90 - black	1 ROL

Hedgehog gutter brush NW 100 + NW 125

Hedgehog gutter brush
for NW 100 and NW 125 half-round gutters.

Notes:
Not suitable for copper gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
85562		120	109648	90 - black	28 PCE

Leaf trap stripe NW 100 + NW 125 + NW 150

Leaf guard
for gutter sizes of NW 100 to NW 150.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.




Item number	Material	Length (cm)	Order number	Color	Packaging
85558	PP	100	109464	90 - black	30 PCS
85559	PP	100	109465	BB - grey	30 PCS
85560	PP	100	109466	BD - brown	30 PCS

Leaf trap grid NW 150 + NW 180

Leaf trap grid
for gutter sizes of NW 150 to NW 180.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.



Item number	Material	Length (cm)	Order number	Color	Packaging
85519	PE	200	112356	90 - black	10 PCS
	PE	300	104275	90 - black	10 PCS

LEAF TRAPS

Leaf trap grid NW 68

Leaf trap grid
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.




Item number	Material	Length (cm)	Order number	Color	Packaging
85516	PE	200	117791	90 - black	10 PCS

Leaf trap grid NW 83

Leaf trap grid
made of UV and shock-resistant PE
for NW 100 to NW 125 half-round gutters.

Notes:
Do not use plastic leaf guards on metal-only
roofs, as heat can build up in permanent
sunlight.




Item number	Material	Length (cm)	Order number	Color	Packaging
85517	PE	200	117792	90 - black	10 PCS

ROOF PLATES

Flashing with water check

Flashing with water check
for various roof coverings and roof slopes.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86410	Aluminum	200	112102		1 PCE / 100 BUN



Chape with water drip

Chape with water check
for various roof coverings
and roof slopes.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86412	Aluminum	200	112106		1 PCE / 100 BUN




Chape without water drip

Chape without water check can universally be
used for various sealing membranes.

Processing instructions:
Roof sealing membranes must be bonded to
the sheet metal.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86414	Aluminum	200	112107		1 PCE / 100 BUN




Gutter hanging system without water check

Gutter hanging system with water check for
various roof coverings and roof slopes.

Processing instructions:
Roof waterproofing membranes must be
bonded to the gutter flashing.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86416	Aluminum	200	112108		1 PCE / 100 BUN



Roof stripe

200-mm roof strips canted on one side.

Processing instructions:
Roof waterproofing membranes must be
bonded to the gutter flashing.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
81341	PVC-U	200	105586	BB - grey	10 PCS / 90 BUN
83341	PVC-U	200	105589	BD - brown	10 PCS / 30 BUN
86641	PVC-U	200	105388	BC - dark brown	10 PCS / 30 BUN



ROOF PLATES

Roof stripe

200-mm roof strips canted on two sides.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
81321	PVC-U	200	105876	BB - grey	10 PCS / 30 BUN
83321	PVC-U	200	105585	BD - brown	10 PCS / 30 BUN
86621	PVC-U	200	105588	BC - dark brown	10 PCS / 30 BUN



Eaves profile

Eaves profile 85 x 30 mm, 135 °.
For the optimal removal of moisture that gets onto the underlay or underlay through the ingress of rain, drifting snow or condensate.


Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
9385	Aluminum	250	116681	NA - natur	10 PCS / 140 BUN



Angle plate with water check

Angle panel with water check
for transitions between suitable
roofs to vertical walls.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86418	Aluminum	200	112109	NA - natur	1 PCE / 100 BUN




Angle plate without water check

Angle panel with water check for transitions
between horizontal and vertical construction
components.

Processing instructions:
Roof waterproofing membranes must be
bonded to the gutter flashing.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86420	Aluminum	200	112110	NA - natur	1 PCE / 100 BUN




Eaves strip without water drip

Eaves strip without water check for use as a metal
sheet create transitions from roof surfaces along
the eaves to the gutter.

Processing instructions:
Roof waterproofing membranes must be
bonded to the gutter flashing.

Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86422	Aluminum	200	112111	NA - natur	1 PCE / 100 BUN



ROOF PLATES

Ridge sheet

First sheet
for bitument shingles, waterproofing membranes
and slate roofing.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86424	Aluminum	200	112112	NA - natur	1 PCE / 100 BUN

Capping strip


Capping strip
for clean transitions between horizontal and
vertical construction components.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86426	Aluminum	200	112113	NA - natur	1 PCE / 100 BUN

Cover profile


Coverage profile
for the optimum degree of coverage and enclosure
for panels of up to 25 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86428	Aluminum	200	112225	NA - natur	1 PCE / 100 BUN

Cover profile


Coverage profile
for the optimum degree of coverage and enclosure
for panels of up to 35 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86429	Aluminum	200	112226	NA - natur	1 PCE / 100 BUN

Cover profile

Attika cover profile
for achieving optimal coverage and enclosure
for panels of up to 45 mm.



Item number	Material	Length (cm)	Order number	Color	Package/ Large pack
86430	Aluminum	200	112227	NA - natur	1 PCE / 100 BUN

PRODUCT INFORMATION


ALL AROUND THE GARDEN HOUSE ROOF



EUROPE'S MOST COMPREHENSIVE ASSORTMENT OF ROOF DRAINAGE PRODUCTS

With the PROTEKTOR roof gutter system, nothing is left to chance. Our decades of experience in manufacturing plastic profiles and roof gutter systems provide you with the security of a high-quality, long-lasting product. The easy-to-assemble half-round gutter set contains all of the necessary drainage components, for up to 50 m² per roof side, for everything from the roof to the ground. Everything, just as you want it.

- ▶ Half-round gutter NW 100
- ▶ Rainwater downpipe DN 75, plus accessories
- ▶ Colours: dark brown, white, grey, anthracite
- ▶ Complete for both sides

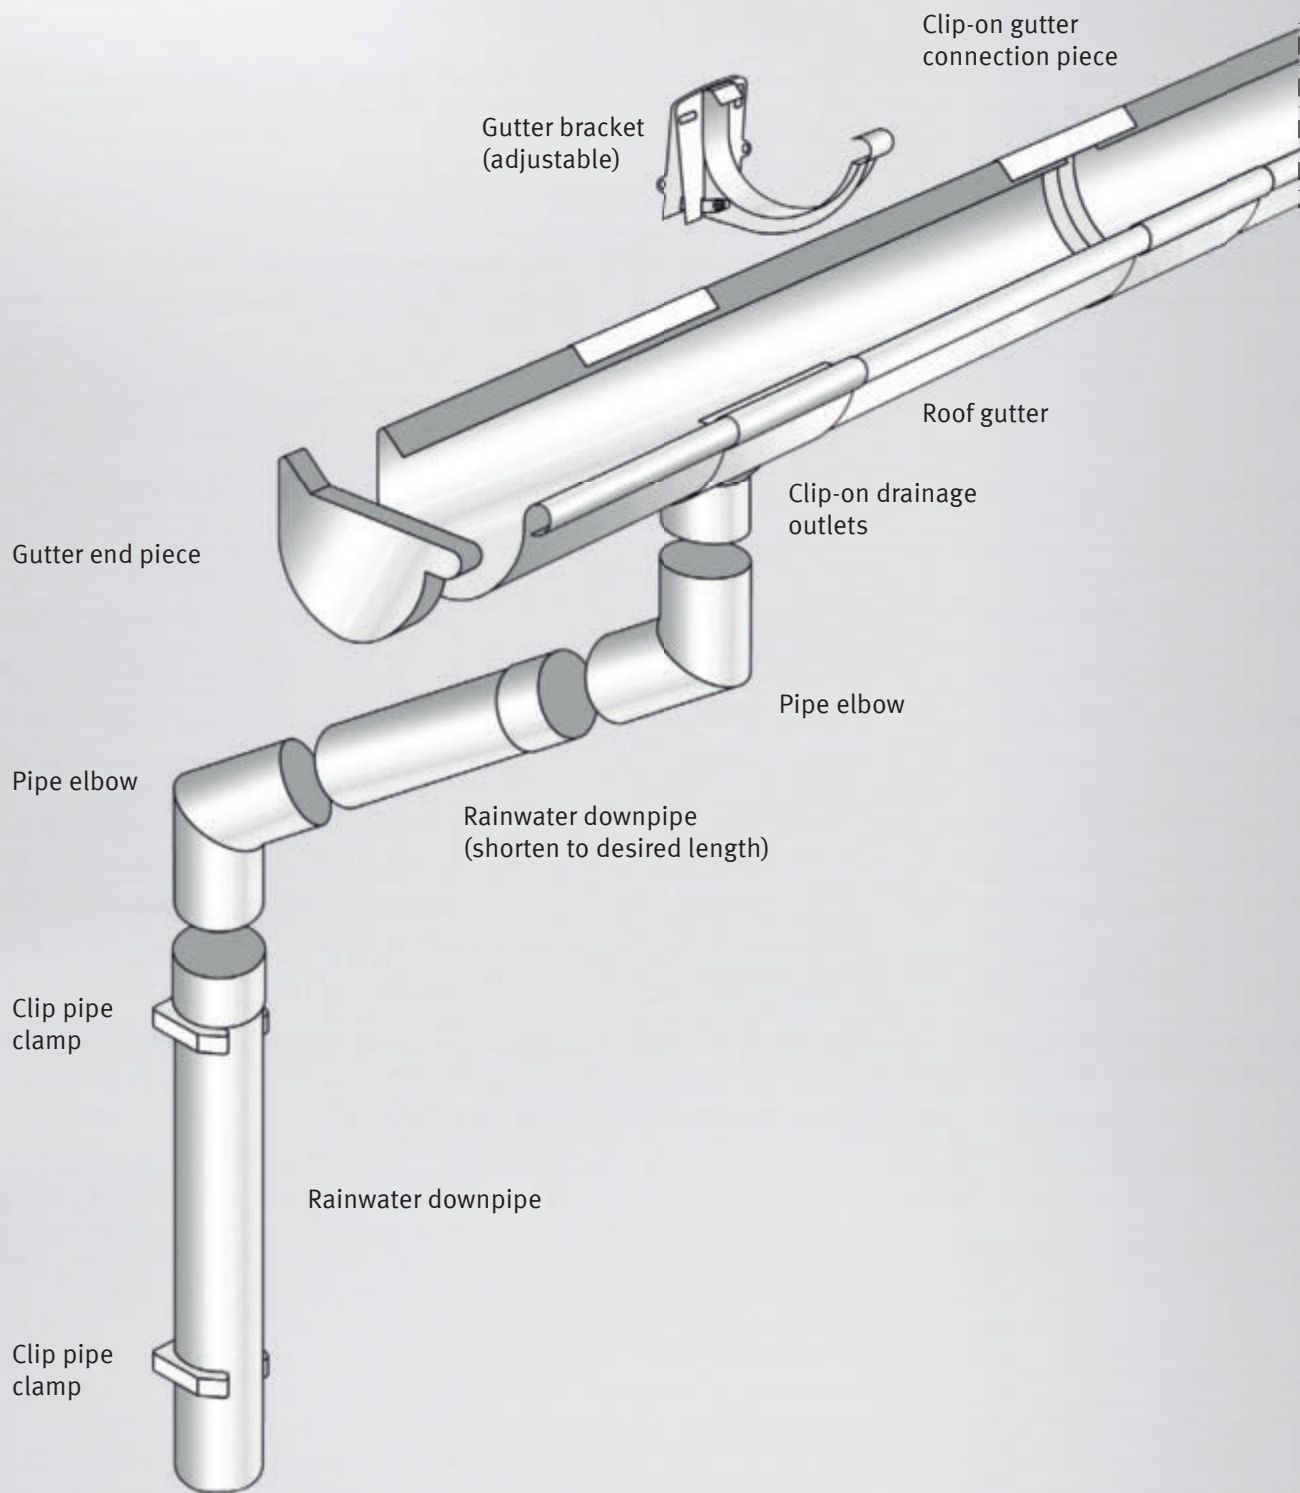

GUTTER SETS

SETS HALF-ROUND GUTTER GARDEN SHEDS WITH PITCHED ROOF (NW) 100

Gutter set for garden house up to 3 m

Roof gutter set for garden houses,
with roof lengths of up to 3.0 m,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85911	PVC-U	109271	BA - white	1 PCE
85909	PVC-U	109264	BB - grey	1 PCE
85831	PVC-U	106003	BC - dark brown	1 PCE
85970	PVC-U	114003	91 - anthracite	1 PCE



Gutter set for garden house up to 4 m

Roof gutter set for garden houses,
with roof lengths of up to 4.0 m,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85906	PVC-U	108959	BA - white	1 PCE
85904	PVC-U	108945	BB - grey	1 PCE
85832	PVC-U	106004	BC - dark brown	1 PCE
85972	PVC-U	114005	91 - anthracite	1 PCE



Gutter set for garden house up to 5 m

Roof gutter set for garden houses,
with roof lengths of up to 5.0 m,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85907	PVC-U	108973	BA - white	1 PCE
85901	PVC-U	108934	BB - grey	1 PCE
85834	PVC-U	106006	BC - dark brown	1 PCE
85974	PVC-U	114007	91 - anthracite	1 PCE



Gutter set for garden house up to 6 m

Roof gutter set for garden houses,
with roof lengths of up to 6.0 m,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85910	PVC-U	109269	BA - white	1 PCE
85902	PVC-U	108938	BB - grey	1 PCE
85859	PVC-U	106240	BC - dark brown	1 PCE
85976	PVC-U	114009	91 - anthracite	1 PCE



Gutter set for garden house up to 7 m

Roof gutter set for garden houses,
with roof lengths of up to 7.0 m,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85954	PVC-U	113685	BA - white	1 PCE
85943	PVC-U	110500	BB - grey	1 PCE
85864	PVC-U	106301	BC - dark brown	1 PCE
85978	PVC-U	114011	91 - anthracite	1 PCE



GUTTER SETS

SETS HALF-ROUND GUTTER GARDEN SHEDS WITH PITCHED ROOF (NW) 100

Gutter set for garden house up to 8 m

Roof gutter set for garden houses,
with roof lengths of up to 8.0 m,
for NW 100 half-round gutters.



Item number	Material	Order number	Color	Packaging
85920	PVC-U	109797	BA - white	1 PCE
85944	PVC-U	110501	BB - grey	1 PCE
85869	PVC-U	106402	BC - dark brown	1 PCE
85980	PVC-U	114013	91 - anthracite	1 PCE

GUTTER SETS

SETS HALF-ROUND GUTTER TERRACE/CANOPY (NW) 100

Gutter set for terrace roofing up to 3 m

Gutter set for terrace coverings,
made of UV and shock-resistant PVC,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85710	PVC-U	118126	BA - white	1 PCE
85703	PVC-U	118119	BB - grey	1 PCE
85712	PVC-U	118128	BC - dark brown	1 PCE
85708	PVC-U	118124	91 - anthracite	1 PCE



Gutter set for terrace roofing up to 4 m

Gutter set for terrace coverings,
made of UV and shock-resistant PVC,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85890	PVC-U	108261	BA - white	1 PCE
85702	PVC-U	118118	BB - grey	1 PCE
85889	PVC-U	108260	BC - dark brown	1 PCE
85707	PVC-U	118123	91 - anthracite	1 PCE



Gutter set for terrace roofing up to 5 m

Gutter set for terrace coverings,
made of UV and shock-resistant PVC,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85892	PVC-U	108263	BA - white	1 PCE
85701	PVC-U	118117	BB - grey	1 PCE
85891	PVC-U	108262	BC - dark brown	1 PCE
85706	PVC-U	118122	91 - anthracite	1 PCE



Gutter set for terrace roofing up to 6 m

Gutter set for terrace coverings,
made of UV and shock-resistant PVC,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85894	PVC-U	108265	BA - white	1 PCE
85700	PVC-U	118116	BB - grey	1 PCE
85893	PVC-U	108264	BC - dark brown	1 PCE
85705	PVC-U	118121	91 - anthracite	1 PCE



Gutter set for terrace roofing up to 8 m

Gutter set for terrace coverings,
made of UV and shock-resistant PVC,
for NW 100 half-round gutters.

Item number	Material	Order number	Color	Packaging
85709	PVC-U	118125	BA - white	1 PCE
85699	PVC-U	118115	BB - grey	1 PCE
85711	PVC-U	118127	BC - dark brown	1 PCE
85704	PVC-U	118120	91 - anthracite	1 PCE



GUTTER SETS

SETS BOXGUTTER GARDEN SHEDS WITH PITCHED ROOF (NW) 68

Box gutter set for garden house up to 2 m

Roof gutter set for garden houses with roof lengths of up to 2.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85959	PVC-U	113690	BA - white	1 PCE
85960	PVC-U	113691	BB - grey	1 PCE
85856	PVC-U	106230	BC - dark brown	1 PCE
88625	PVC-U	120163	91 - anthracite	1 PCE

Box gutter set for garden house up to 3 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85930	PVC-U	109839	BA - white	1 PCE
85903	PVC-U	108944	BB - grey	1 PCE
85837	PVC-U	105999	BC - dark brown	1 PCE
88626	PVC-U	120164	91 - anthracite	1 PCE

Box gutter set for garden house up to 4 m

Roof gutter set for garden houses with roof lengths of up to 4.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85912	PVC-U	109441	BA - white	1 PCE
85905	PVC-U	108960	BB - grey	1 PCE
85839	PVC-U	106001	BC - dark brown	1 PCE
88627	PVC-U	120165	91 - anthracite	1 PCE

Box gutter set for garden house up to 5 m

Roof gutter set for garden houses with roof lengths of up to 5.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85948	PVC-U	112301	BA - white	1 PCE
85966	PVC-U	113697	BB - grey	1 PCE
85873	PVC-U	106437	BC - dark brown	1 PCE
88628	PVC-U	120166	91 - anthracite	1 PCE

Box gutter set for garden house up to 6 m

Roof gutter set for garden houses with roof lengths of up to 5.5 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85685	PVC-U	118315	BA - white	1 PCE
85686	PVC-U	118319	BB - grey	1 PCE
85684	PVC-U	118311	BC - dark brown	1 PCE

GUTTER SETS

SETS BOXGUTTERS TERRACE/CANOPY (NW) 68

Box gutter set for carport/terrace roofing up to 3 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85695	PVC-U	118110	BA - white	1 PCE
85698	PVC-U	118113	BB - grey	1 PCE
85689	PVC-U	118104	BD - brown	1 PCE
85692	PVC-U	118107	BC - dark brown	1 PCE
88622	PVC-U	120160	91 - anthracite	1 PCE

Box gutter set for carport/terrace roofing up to 4 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85694	PVC-U	118109	BA - white	1 PCE
85697	PVC-U	118112	BB - grey	1 PCE
85688	PVC-U	118103	BD - brown	1 PCE
85691	PVC-U	118106	BC - dark brown	1 PCE
88623	PVC-U	120161	91 - anthracite	1 PCE

Box gutter set for carport/terrace roofing up to 5 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85693	PVC-U	118108	BA - white	1 PCE
85696	PVC-U	118111	BB - grey	1 PCE
85687	PVC-U	118102	BD - brown	1 PCE
85690	PVC-U	118105	BC - dark brown	1 PCE
88624	PVC-U	120162	91 - anthracite	1 PCE

GUTTER SETS

SETS BOXGUTTERS GARDEN SHEDS (NW) 83

Box gutter set for garden house up to 3 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85851	PVC-U	118134	BB - grey	1 PCE
85850	PVC-U	118133	BD - brown	1 PCE

Box gutter set for garden house up to 4 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85849	PVC-U	118132	BB - grey	1 PCE
85848	PVC-U	118131	BD - brown	1 PCE

Box gutter set for garden house up to 5 m

Roof gutter set for garden houses with roof lengths of up to 5.0 m, made of UV-resistant and shockproof PVC for NW 83 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85847	PVC-U	118130	BB - grey	1 PCE
85846	PVC-U	118129	BD - brown	1 PCE

GUTTER SETS

SETS BOXGUTTERS CARPORT/TERRACE (NW) 83

Box gutter set for carport/terrace roofing up to 3 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85984	PVC-U	117051	BB - grey	1 PCE
85987	PVC-U	117199	BD - brown	1 PCE

Box gutter set for carport/terrace roofing up to 4 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85985	PVC-U	117197	BB - grey	1 PCE
85988	PVC-U	117200	BD - brown	1 PCE

Box gutter set for carport/terrace roofing up to 5 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85986	PVC-U	117198	BB - grey	1 PCE
85989	PVC-U	117201	BD - brown	1 PCE

Box gutter set for carport/terrace roofing up to 6 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85855	PVC-U	118138	BB - grey	1 PCE
85853	PVC-U	118136	BD - brown	1 PCE

Box gutter set for carport/terrace roofing up to 8 m

Roof gutter set for garden houses with roof lengths of up to 3.0 m, made of UV-resistant and shockproof PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Order number	Color	Packaging
85854	PVC-U	118137	BB - grey	1 PCE
85852	PVC-U	118135	BD - brown	1 PCE

GUTTER SETS

ROOFING SET / DOWNPIPE SET

Box gutter set for garden house up to 2 m

Gutter set specially designed for octagonal garden houses, made of UV and shock-resistant PVC for NW 68 box-shaped gutters.

Processing instructions:
The special adhesive no. 81250 must be used for all box gutter parts.



Item number	Material	Length (cm)	Order number	Color	Packaging
85866	PVC-U	202	106387	BC - dark brown	1 PCE

Rainwater downpipe set for wintergarden

Downpipe sets for sunrooms made of UV and shock-resistant PVC for DN 50 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84000	PVC-U	200	104912	BA - white	1 PCE
86600	PVC-U	200	105379	BC - dark brown	1 PCE
86602	PVC-U	200	110903	91 - anthracite	1 PCE



Rainwater downpipe set for wintergarden

Downpipe sets for sunrooms made of UV and shock-resistant PVC for DN 75 half-round gutters.

Item number	Material	Length (cm)	Order number	Color	Packaging
84400	PVC-U	250	104370	BA - white	1 PCE
86601	PVC-U	250	105381	BC - dark brown	1 PCE
86603	PVC-U	250	110904	91 - anthracite	1 PCE





Adhesive for PVC tube

Special dissolving adhesive for the quick and reliable bonding of molded parts made of rigid PVC with good temperature resistance and good UV resistance.

Notes:
Tube 180 g
Processing instructions:
Transparent and fast-setting.
For bonding gaps < 0.1 mm.



Item number	Material	Length (cm)	Order number	Color	Packaging
81250		19	116916		30 PCE

Gutter bracket bending pliers

Bending pliers for gutter brackets



Item number	Material	Length (cm)	Order number	Color	Packaging
81255	Galvanised steel	200	104949	J3 - fir green	1 PCE




Gutter repair tape

Repair tape for
gluing to half-round and box-shaped gutters.



Item number	Material	Length (cm)	Order number	Color	Packaging
82222	PVC-U	250	106951	90 - black	1 PCS

CONCRETE / SCREED JOINT PROFILES

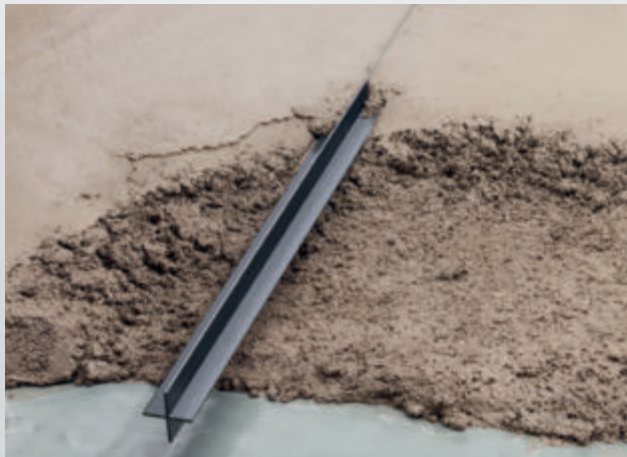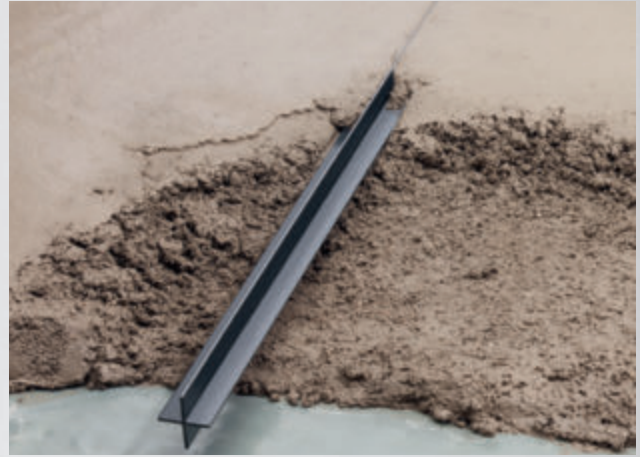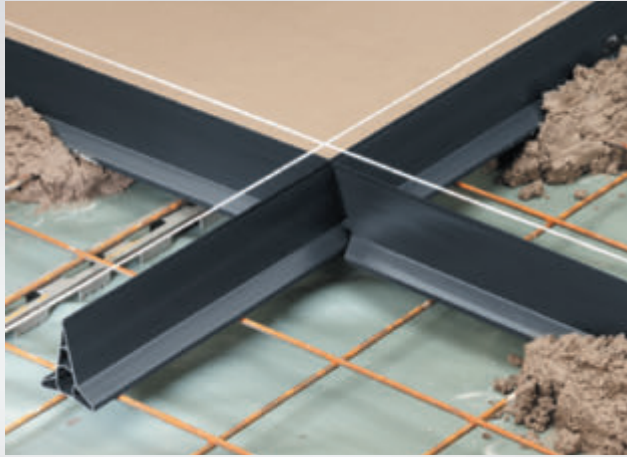

Protektor concrete and screed profiles enable you to perform concrete construction, screed and flooring work with optimum results – because many construction phases can be carried out much more easily and precisely. We achieve this through top quality and a sophisticated range: Protektor concrete and screed profiles are made of materials which

stand out due to their premium quality and user benefits. In this catalogue, you will therefore find a selection of profiles which are perfectly adapted to the most common concrete and screed joints. Other solutions such as the step corner profile and the gravel trap are practical supplements to our range and support you in your daily work.

1. CONSTRUCTION AND PRESS JOINTS

Construction and press joints are construction and press phases which occur during the installation of screed in large areas. The joints are usually filled with solid bond resin.

2. DUMMY JOINTS

Screed, particularly concrete screed, shrinks during drying, which can result in the formation of wild cracks. A dummy joint is a planned and defined crack in the screed (predetermined breaking point).

Timely planned joints in the flooring (e.g. tiles, ceramics, linoleum, etc.) make it possible to form clean and straight dummy joints in the screed with dummy joint profiles. Some dummy joint profiles effectively lock the screed plates in place. Dummy joints in door soffits and passageways should not be sealed or closed. When hammering down the dummy joint profiles, it is important to install them horizontally/ vertically to ensure consistently high overlapping of the sides. Then the sides are covered with screed and smoothed.

In elastic and soft floorings (e. g. linoleum, carpeting, etc.), it is advisable to continue the dummy joint in the flooring with movement joint profiles. Otherwise it is possible that the dummy joints are visible in the flooring. This depends, however, on the quality and properties of the flooring, possible temperature fluctuations and expansion as well as formation and position of the dummy joint. In hard floorings (e.g. stone, ceramics, etc.), the joints must be continued in the flooring.

It is not part of the standard procedure or possible to fill screed with bond resin when dummy joints are already installed. As an alternative, the dummy joint can be made with a trowel groove and then filled with bond resin.

The screed specifications apply correspondingly to concrete floors.

3. MOVEMENT JOINTS

Movement joints separate the screed. They interrupt heat and sound transmission and allow movement. Movement joints must extend to the insulation layer. Possible reinforcements in the screed must be separated. They must be formed with elastic material or a special movement joint profile in the flooring area.

According to DIN 18560-2, movement joints within screed surfaces must be secured against height offset if required. It must be ensured that the screed is dried properly; the use of screed plugs is recommended.

Especially suited solutions or movement joint profiles must be used for movement joints in the screed above building joints.

4. BUILDING JOINTS

Building joints completely separate the building, including base plate, screed and walls. Settlement in the building may also be expected. Building joints can be found in larger buildings, halls and annexes to existing buildings.

5. EDGE JOINTS

Edge joints separate the screed at walls, supports, door reveals, etc. and can be regarded as movement joints. They are usually constructed using edge strips.

NOTES

Please comply with the corresponding guidelines and standards when installing concrete and screed profiles. The concrete and screed profiles are suitable for light to medium loads. This also depends, however, on the employed concrete and screed quality as well as the future use of/loads on the floor and joint. The profiles are not suitable for e. g. heavy equipment, forklifts or dynamic loads. More information on the respective profiles can be found in the product overview.

CONCRETE/SCREED JOINT PROFILES

PRODUCT INFORMATION



OVERVIEW OF MAIN APPLICATIONS

Item number	Description	Material	Screed				Concrete floors, concrete slabs		
			Dummy joints	Movement joints	Edge stop	Drip profile	Dummy joints	Edge stop	Drip profile
3908	Dummy joint profile for concrete floors	Rigid PVC					X	X	X
3906	Dummy joint profile for screed	Rigid PVC	X			X			
1116	Dummy joint profile for screed	Galvanised steel	X						
3914	Dummy joint profile for screed	Rigid PVC	X						
3915	Dummy joint profile for screed	Rigid PVC	X						
3917	Dummy joint profile for screed and concrete floors	Rigid PVC with foam pad	X				X		
3929	Movement joint profile for screed	Rigid PVC with PE foam		X					
3923	Movement joint profile for screed	Galvanised sheet steel with PE foam and steel plugs with polymer coating		X					
3916	Movement joint profile for screed	Galvanised sheet steel with PE foam and steel plugs with polymer coating		X					



JOINT PROFILES

Dummy joint profile concrete PVC

PVC dummy joint profiles for concrete floors is used to create clean and straight dummy joints as well as drip profiles and formwork stops. The channel in the profile can also be used to route cables. The profile's wide contact area ensures a high degree of stability.


Function:

- dummy joint
- drip profile
- formwork stop
- channel for cable routing
- straight joint run

Height (b): 80 mm

Processing instructions:

Installation is carried out before concrete pouring and set on concrete chunks spaced approx. 70-80 cm from one another. Level the profile to the desired height. The concrete loss creates a joint of 1-2 mm along the profile. The position and distance of the profile depends on the specifications from the planner.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3908	PVC-U	500	102504	5 PCS / 48 BUN

Dummy joint profile screed PVC

Screed dummy joint profile for screed for creating clean and straight dummy joints as well as drip profiles.


Function:

- dummy joint
- drip profile
- straight joint run.

Height (b): 40 mm

Processing instructions:

Installation is carried out when the screed is being laid and is simply placed into the freshly set screed. Level the profile to the desired height. The concrete loss creates a joint of 1-2 mm along the profile. The position and distance of the profile depends on the specifications from the planner.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3906	PVC-U	300	102502	10 PCS / 80 BUN

Dummy joint profile screed galvanised steel

Screed dummy joint profile for screed for creating clean and straight dummy joints. Helps to lock screed panels.


Function:

- dummy joint
- straight joint run
- clean surface finish

Height (b): 30 mm

Processing instructions:

Installation takes place while the screed is being laid. Level the profile to the desired height. When pushing in the profile, remember to horizontally/vertically orient the profile as to ensure that the leg overlap is equally high. The closed side must be installed so it faces up.



Item number	Material	Length (cm)	Order number	Package/ Large pack
1116	Galvanised steel	200	100001	15 PCS / 48 BUN

Dummy joint profile screed PVC

Screed dummy joint profile for screed for creating clean and straight dummy joints.


Function:

- dummy joint
- clean surface finish
- straight joint run

Height (b): 25 mm

Processing instructions:

Installation takes place while the screed is being laid. When pushing in the profile, remember to horizontally/vertically orient the profile to ensure that the leg overlap is equally high. The higher leg must be installed vertically.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3914	PVC-U	250	102563	40 PCS / 24 BOX

JOINT PROFILES

Dummy joint profile screed PVC

Screed dummy joint profile for screed for creating clean and straight dummy joints.


Function:

- dummy joint
- clean surface finish
- straight joint run

Height (b): 35 mm

Processing instructions:

Installation takes place while the screed is being laid. When pushing in the profile, remember to horizontally/vertically orient the profile to ensure that the leg overlap is equally high. The higher leg must be installed vertically.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3915	PVC-U	250	102571	40 PCS / 20 BOX

Dummy joint profile screed/concrete PVC

Dummy joint profile for concrete floors and screed for creating clean and straight joint profiles. This profile, made of PVC and a neoprene insert with pre-stress, is resistant against most media, such as oils, fats, etc.


Function:

- dummy joint
- joint sealant
- straight joint run

Height (b): 30 mm

Processing instructions:

Installation while conducting concrete work or screed installation:
Set the profile into the fresh concrete or screed and level to the desired height.
Installation in the trimmed joint for creating a sealed joint through pre-stress:
The profile is to be pressed into the trimmed joint. The pre-stress of the profile allows for the joint to be sealed. The joint cut should be approx. 6-7 mm wide and approx. 32 mm deep.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3917	PVC-U + Cellular rubber	250	102583	40 PCS / 24 BOX

Movement joint profile PVC

Movement joint profiles with asymmetric shapes for creating clean and decoupled connections to other construction components.


Function:

- asymmetric movement joint profile, for simple as well as double installation
- clean connections to other construction elements offered by the asymmetric shape
- universal applications for various screed heights
- secure de-coupling
- simple installation

Height (b): 95 mm

Processing instructions:

The movement joint profile is characterised by its asymmetric shape. The 95-mm-high PE strip is elastic yet retains its shape relatively well. This allows for the universal application of just a single movement joint profile for various screed heights. This reduces the need for warehousing. Double installation is also possible with the asymmetric movement joint profile, ensuring greater screed movement absorption. The asymmetric shape provides for clean and decoupled connections to other construction elements.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3929	Hard PVC + PE strips	250	110945	12 PCS / 12 BOX


Movement joint profile

Movement joint profiles for creating movement joints using shear force dowel fastening.

- Function:
- movement joints
 - especially well-suited for floating screed
 - straight joint run
 - clean surface finishes
 - shear force dowel fastening
 - height offset

Processing instructions:
Installation takes place before the screed is laid. The profile is laid in accordance with the prescribed joint plan and may be sealed using the adhesive tape. The dowels are installed horizontally, at a right angle in relation to the joint. The distance between the dowels is approx. 30 cm. Once the screed has dried, cut off the protruding foam material strips flush along the screed surface (see installation example, similar to 3916).

Notes:
The packaging contains 54 screed plugs no. 3940.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3923	Galvanised steel + PE foam	250	102604	6 PCS / 25 BOX


Movement joint profile

Movement joint profiles in screed for creating movement joints using shear force dowel fastening.

- Function:
- movement joints
 - especially well-suited for floating screed
 - straight joint run
 - clean surface finishes
 - shear force dowel fastening
 - height offset

Processing instructions:
Installation takes place before the screed is laid. Place profile in line with the prescribed joint plan. Install the dowels horizontally at a right angle in relation to the joint at a distance of 30 cm (see installation example)

Notes:
The packaging contains 90 screed plugs no. 3940.




Item number	Material	Length (cm)	Order number	Package/ Large pack
3916	Galvanised steel + PE foam	250	102576	10 PCS / 20 BOX

Screed peg PVC

Screed dowels provide shear force dowel fastening in screed and reduce possible height offset.

Notes:
For movement joint profiles no. 3916 and 3923, the screed dowels are included in the quantity are included at the factory.



Item number	Material	Length (cm)	Order number	Package/ Large pack
3940	Galvanised steel, with PVC coating	30	102636	100 PCE / 40 BOX

CONCRETE/SCREED JOINT PROFILES


PROCESSING EXAMPLE FOR MOVEMENT JOINT PROFILE 3916



Trim the PE foam strip along the lower edge to the required height, according to the screed thickness. Mark and cut using an all-purpose blade.



Mark the openings for the heating pipes exactly. When the profile is used between door frames, cut it to length so that it can be easily clamped between the edge strips.

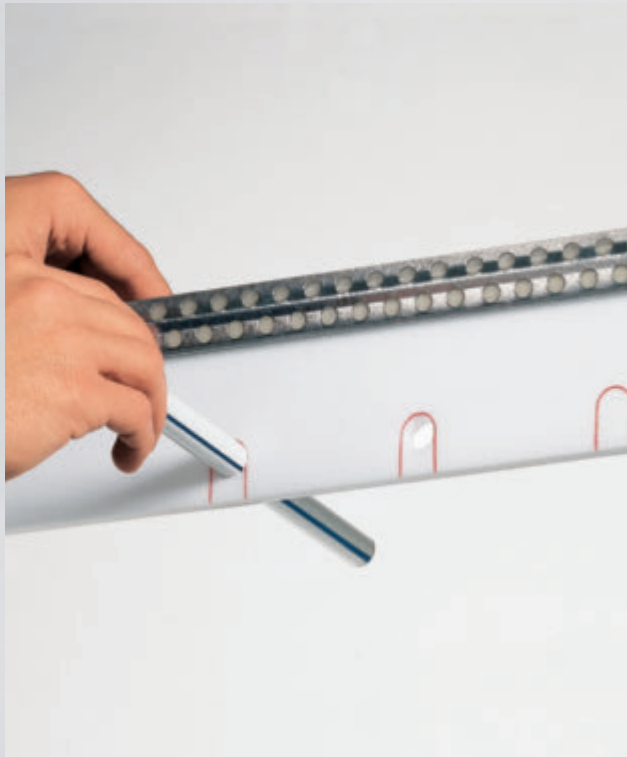

Exact pipe openings can be produced by puncturing the foam strip with a piece of pipe. Then cut through the foam strip with a straight cut downwards.



Place over the installed heating pipes and fix using dabs of mortar. Insert the plugs approx. 30 cm apart directly below the metal rail.


HEAT CONDUCTION PLATES

Heat conduction plate

Heat conducting panels for ensuring even and effective floor warming.

Product width: 118 mm
Processing instructions:
Place the heat conducting panels in the system panel and install the heating pipes in the grooves.
Ideally suited for dry screed, cement screed and floating screed.

Item number	Material	Length (cm)	Order number	Package/ Large pack
50414	Galvanised steel	75	110787	50 PCE / 27 BOX
50914	Aluminum	75	116049	50 PCE / 27 BOX




Heat conduction plate

Heat conducting panels for ensuring even and effective floor warming.

Product width: 120 mm
Processing instructions:
Place the heat conducting panels in the system panel and install the heating pipes in the grooves.
Ideally suited for dry screed, cement screed and floating screed.

Item number	Material	Length (cm)	Order number	Package/ Large pack
50416	Galvanised steel	75	115774	48 PCE / 27 BOX
50916	Aluminum	75	115773	48 PCE / 27 BOX



CONCRETE/SCREED JOINT PROFILES

STAIR CORNER PROFILE



SAFETY AT EVERY STEP



Staircases always pose some risk for accidents. The proper precautions must be taken, especially in public buildings. The PROTEKTOR stair corner profile is ideally suited for guaranteeing safety while offering visually attractive accents and a modern design. The anti-slip profiling on top of the profile reduces the risk of slipping when using the stairs. At the same time, the profile also protects delicate stair edges against damage and increased wear. It is also well suited for use when conducting repair work.

Tests:

- ▶ Verification of slip resistance in accordance with DIN 51130 and data sheet BGR 181. Test results: R 10
- ▶ Verification of the displacement volume in accordance with DIN 51130 and data sheet BGR 181. Evaluation group for the displacement space: V 8

Application:

- ▶ Pre-fabricated stair components
- ▶ New stair constructions (in-situ concrete)
- ▶ Repair rails
- ▶ For interior and exterior areas (V2A, 1.4301)

PROTEKTOR TREPPENKANTEN-PROFIL

SICHERHEIT AUF SCHRITT UND TRITT

Treppen bergen stets eine gewisse Unfallgefahr. Gerade in öffentlichen Gebäuden gilt es, hier entsprechende Vorkehrungen zu treffen. Das PROTEKTOR Treppenkanten-Profil kommt dann zum Einsatz, wenn es darum geht, Sicherheit bei einem ständigen anstehenden Abstieg und einwandiges Design zu verbinden. Durch seine charakteristische Gleitschutzprofilierung verringert es das Rutschgefahr beim Betreten der Stufen. Im gleichen Zug wird die empfindliche Treppenkante vor Beschädigung und verschleißde-gradierung geschützt. Das Profil kann ebenso im Falle einer Reparatur verwendet werden.

Einsatz:

- Treppen-Fertigteillbau
- Treppen-Neubau (Ortbeton)
- Reparaturschiene
- Für den Innen- und Außenbereich (V2A, 1.4301)

Prüfungen:

- Prüfung der Rutschhemmung gemäß DIN 51130 und Merkblatt BGR 181. Ergebnis der Prüfung: R 10
- Bestimmung des Verdrängungsraumes gemäß DIN 51130 und Merkblatt BGR 181. Bewertungsgruppe für den Verdrängungsraum: V 8

PROTEKTOR

PROTEKTOR TREPPENKANTEN-PROFIL

PROTEKTOR

PROTEKTOR TREPPENKANTEN-PROFIL

PROTEKTOR

PROTEKTOR TREPPENKANTEN-PROFIL

PROTEKTOR


PROTEKTOR TREPPENKANTEN-PROFIL

372 | Stair corner profiles

Step corner profile Stainless steel


Stainless steel stair strips with a matt surface and non-slip protection,

Notes:
Specially developed for schools and kindergartens. Fulfils the guidelines and requirements of the statutory accident prevention regulations (see technical information).




Item number	Plaster thickness (mm)	Length (cm)	Order number	Material	Package/ Large pack
2000		100	101133	Stainless steel	25 PCS / 56 BOX
		110	105691	Stainless steel	25 PCS / 56 BOX
		120	101138	Stainless steel	25 PCS / 56 BOX
		130	101140	Stainless steel	25 PCS / 28 BOX
		150	101142	Stainless steel	25 PCS / 28 BOX
2001		500	101146	Stainless steel	12 PCS / 80 BUN


SPECIAL PROFILE
GRAVEL TRAP STRIP

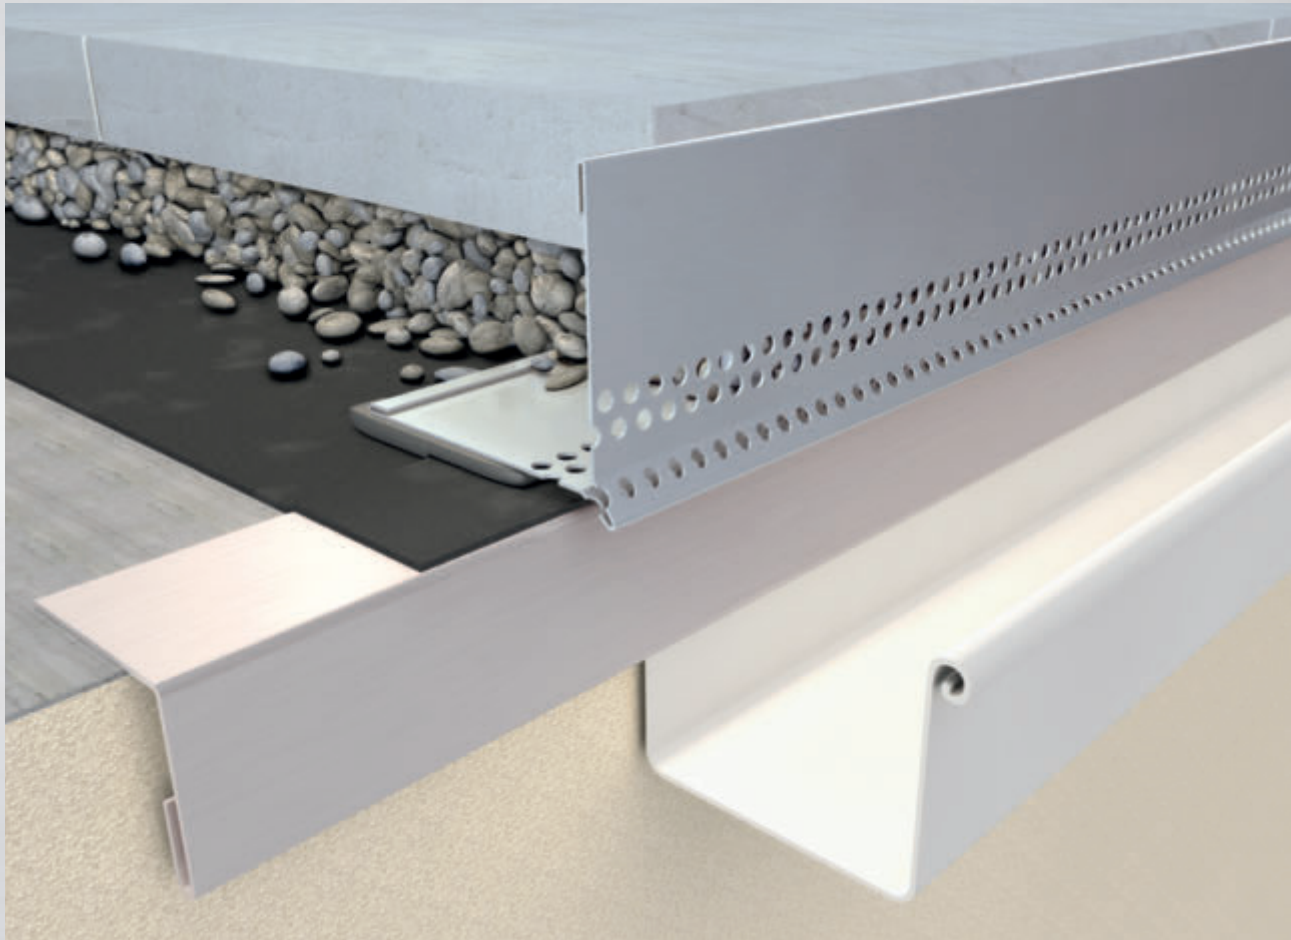

INSTRUCTIONS FOR APPLICATION

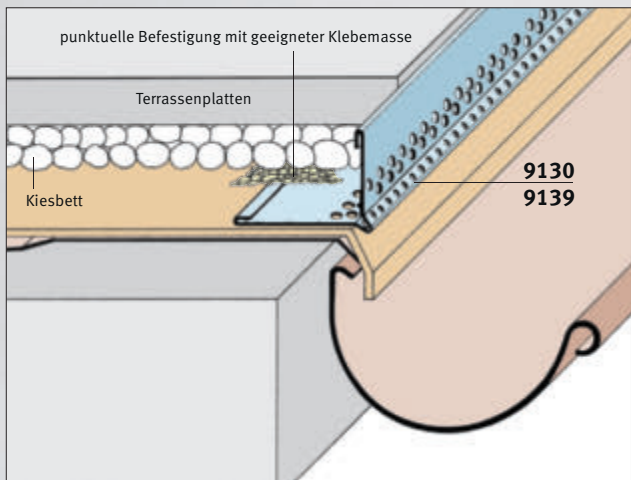

The gravel trap strip is ideally suited for loosely laid large balcony and terrace plates. Use suitable adhesive cement for securing gravel trap strip point by point. A suitable, load-bearing surface and superstructure must be installed as a substrate for the balcony and terrace plates. Suitable gravel/grit is to be appropriately compressed. The gravel trap strip is not to be strained by loads or movement caused by the balcony and terrace plates.

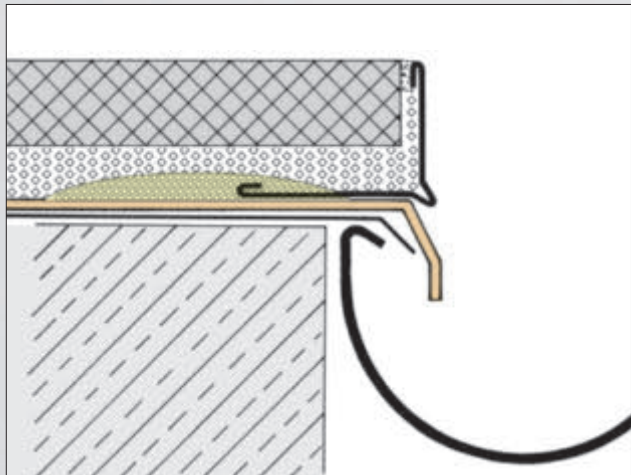

Our product flyer “Gravel trap strips” can be found at www.protektor.de




GRAVEL TRAP STRIPS

Gravel trap Alu

Water-permeable gravel trap strips with a drip edge,
available for heights of 50 and 70 mm.


Item number	Material	Length (cm)	Order number	Package/ Large pack
9361	Aluminum natural	250	112154	10 PCS / 20 BUN



Gravel trap Alu

Water-permeable gravel trap strips with a dripping
edge (both legs perforated),
available for heights of 80 and 100 mm.


Item number	Material	Length (cm)	Order number	Package/ Large pack
9424	Aluminum natural	250	111785	10 PCS / 24 BUN



Gravel trap Alu

Water-permeable gravel strip with a dripping edge,
available in heights of 80 mm.


Item number	Material	Length (cm)	Order number	Package/ Large pack
9423	Aluminum natural	250	106684	10 PCS / 30 BUN



Gravel trap Alu

Water-permeable gravel trap strips with a drip
edge,
available for heights of 80 and 90 mm.


Item number	Material	Length (cm)	Order number	Package/ Large pack
9130	Aluminum natural	250	105761	10 PCS / 30 BUN



Gravel trap Alu

Water-permeable gravel trap strips with a drip
edge,
available for heights of 50 and 70 mm.

Item number	Material	Length (cm)	Order number	Package/ Large pack
9139	Aluminum natural	250	104199	10 PCS / 49 BUN




GRAVEL TRAP STRIPS

Edge stop profile Alu

Edge stop profile 100 x 120 mm

Item number	Material	Length (cm)	Order number	Package/ Large pack
9421	Aluminum natural	250	103846	6 PCS / 20 BUN



PLASTER PROFILES

1. Materials

- Galvanized slit strip or sheet steel with a zinc coating code Z275 or Z350 (increased zinc coating) to DIN EN 10143 and DIN EN 10346. Also with organic coating to DIN EN 10169-1.
- Aluminium strips and sheets in special alloys, possibly with acrylic, PUR or polyester coating according to DIN EN 485 and DIN 573.
- Stainless steel slit strip according to EN 10088, material no. 1.4301.
- Galvanized steel wire according to DIN EN 10218-1, DIN EN 10244-1 and DIN EN 10244-2 (min. class A).
- Stainless steel wire according to DIN EN 10264-4.
- Rigid PVC impact resistant according to DIN EN 21306.
- Soft PVC in suitable Shore hardness. Special qualities in synthetic rubber compound. Both materials are resistant to weathering and ageing according.

2. Guarantee

- The company guarantees within its general terms of business the excellent quality of raw material used according to the above mentioned indications as well as the efficient manufacture of products.
- As the composition and the chemical and physical properties of the plasters used are outside the company's influence, no guarantee can be given for the resistance of the profiles to corrosion. In cases where new plastering and insulating materials are used, the buyer is advised to determine whether they are compatible with the profile material.
- Varying factors in the application of plaster make it necessary to adapt to the individual working conditions from case to case. This is the responsibility of the buyer. The term of guarantee for plaster profiles is twelve months, in compliance with the legal regulations on sales contracts, and begins on the date of delivery.
- Practical tests are the safest way to avoid possible mistakes, for which no guarantee can be given. Corrosion can only occur if the plasters are under permanent influence of humidity or if they dry too slowly. Make sure the plaster dries quickly by airing well.

3. Production Methods

- Rolling on profiling machines (with safety devices to prevent damage to the material surface). Pressing and punching. Extruding of PVC.

4. Packing

We are member of Interseroh, contract no. 25 608

- Metal profiles are packed in paper and secured with wire or foil.
- PVC profiles are packed in cartons or in foil.
- For long lengths, wooden laths provide additional protection.
- Each bundle is marked with the type and number of PROTEKTOR profile, length, units per bundle and colour.

5. Delivery and Transport

- Fast delivery is made possible by sufficient stocking and production capacity. Large quantities are transported on special pallets by our own forwarding agents. We have stockists in Germany and further stockists in Europe and Middle East.

6. Technical Service

- Samples, catalogues and special literature is available with detailed information. A detailed technical showroom at our offices. Lectures to distributors, guilds and training schools. Participation in Building Exhibitions in Germany and abroad.

7. Advice to Follow

Protektor plaster profiles are used as plaster support according to DIN EN 13914 and DIN EN 13658.

- The plaster thickness shown in the drawings are the minimum thickness to be realized with a tolerance of ± 1 mm without fixing material. The minimum thickness is to be controlled at the fixing of the profile and in case of differences to be claimed immediately. Claims after the finishing of the plaster work can not be accepted.
- Choose your profiles to suit their application (inside or outside) and the plaster thickness to be used. Choose practical lengths, e.g. to suit storey height and door size. Profiles can be cut into short lengths for window and radiator recesses.
- Cut the metal profiles with hand plate shears only, do not use a parting-off grinder (there is a danger of damage to the galvanising or coating). Profiles should be used as long lengths as possible for corners and base-edging outdoors.
- PROTEKTOR profiles fixed once allow continuous application of the plaster and removal of clean surfaces over exact edges. This eliminates the need to batten slats. Profiles near the ground may be particularly at risk of snow accumulation, road salt contamination or heavy splashing water. Therefore, only suitable profiles should be used there in accordance with the instructions for the individual materials. We recommend the use of stainless steel profiles for very exposed locations and facades exposed to strong weather conditions. The edges of the stainless steel profiles must not be stripped with normal steel tools - risk of extraneous rust! (see also point 9)
- Expansion joints/sliding bearing joints: Expansion joints (vertical) and sliding bearing joints (horizontal) are structurally necessary joints that separate all components of a building across the joint width and must be adopted in the respective finishing trades (plaster and ETICS). They must be dimensioned, planned and executed in accordance with the relevant valid regulations. Expansion joint profiles and sliding bearing joint profiles (or profile combinations) cover these joints and absorb tensile and compressive movement. The specifications for maximum movement absorption (tension/pressure) according to the information in the product catalogue or product data sheet must be observed.

Examples of expansion joints:

Transition from old building to new building or for terraced houses.

Examples for sliding joints:

Elevations, slab sliding bearings, parapet formations, often in connection with material changes in the wall former.

Movement joints (also construction joints or field boundary joints):

Movement joints are separation joints with small movements, especially from the plaster system or cladding. Movement profiles have a centre piece made of flexible plastic to absorb the small movements. Their use is only permitted for vertical joints. Alternatively, profile combinations of end profiles with joint sealants can be used.

Examples of movement joints: Field boundaries in plaster systems for large surfaces, absorption of minor changes in position in wall

PLASTER PROFILES

or ceiling coverings, brick lining of steel, reinforced concrete and timber frame components.

8. Installing the Profiles

- With plaster and anhydrite mortars containing gypsum, the profiles can be applied with the same material. In damp rooms and in the case of surfaces where cement – lime cement, plaster and wall binding agents – are to be applied, materials containing gypsum should not be used for fixing the profiles. The same applies for external rendering. In such cases, fixing mortar on a cement base should be used. Should galvanised nails be used for fixing the profiles, they should be removed before the plaster is applied.

9. Compatibility

- Check the compatibility between plaster mortar and profile material. (See leaflet for planning and application of plaster profiles for exterior and interior use).
- Profiles made of galvanised sheet steel are suitable for mineral plasters based on lime, lime cement, PM binder, cement or gypsum.
- Aluminium profiles are suitable for gypsum, synthetic resin plasters or fillers in interior areas.
- Aluminium profiles with white primer coating are suitable for plasters based on lime, lime cement, PM binder, cement or gypsum. Also available with top coating/finishing coats of synthetic resin/silicate resin and silicate plasters. Indoors also for wall surfaces in kitchens and bathrooms with the water exposure classes WO-I (low water exposure), W1-I (moderate water exposure) and W2-I (high water exposure) according to DIN 18534-1.
- Plaster profiles made of stainless steel, material no. 1.4301, are suitable for
 - for all types of plaster and mortar
 - for indoor and outdoor use;
 - for thermal insulation;
 - Indoors for use in kitchens and bathrooms, windowless rooms with forced ventilation, shafts, indoor swimming pools/brine pools with all water exposure classes WO-I to W3-I (very high water exposure) in areas where the profiles are covered by plaster, tiles or paint (exposed profiles require special care, see also point 10);
 - In outdoor areas also for plinth surfaces with influences such as snow accumulations, road salt contamination or heavy splashing water contamination.
 - where the effects of moisture must be expected over time;
 - where optimum corrosion protection is required due to special conditions in the building structure and its surroundings.
- All stainless steel profiles in this catalogue are made of material 1.4301.

10. Cleaning and care of uncovered surfaces, e.g. of profiles for ceramic tiles and heavy corner beads made of stainless steel after fixing

- The high resistance of PROTEKTOR stainless steel profiles is only guaranteed if the surface is unblemished.
- The surface is plain, hard and non-porous. You can use customary cleaning material, but should rinse thoroughly with clear water after cleaning
- Basic cleaning: At external construction elements it is absolutely necessary to remove protection coating immediately after fixing. Atmosphere influences can lead to aging of the coating making removal difficult or impossible. This can also lead to separation of chloride and formation of hydrochloric acid. Since invisible traces of adhesives or protection lacquers can lead to corrosion, cleaning with basic cleaner is always necessary. In case of first cleaning, lime and cement splashes should be removed with a rubber scraper, a wood ship or similar – if possible before setting. Do not use tools made of normal steel (spattle, steel wool), since they can cause extraneous rust. Hydrochloric acid should not be put on the surface – even as weak solution (e.g. acid treatment from adjacent brickwork or ceramic construction elements). If tiling cannot be done without acid treatment you should wash thoroughly with clear water immediately (use high-pressure cleaner).
- Maintenance: How often you should clean depends on intensity and type of dirt as well as on demands you make on the visual quality of the stainless steel construction elements. Particular attention should be paid to possible dirt traps. If using usual cleaning material the instructions for use should be strictly observed.

© PROTEKTORWERK

TECHNICAL INFORMATION

ROUND EDGES FOR ENHANCED SAFETY



The safety of children and elderly people in public buildings has been a topic of statutory accident insurance for many years. New modern architectural design and the development of innovative coating materials led to the „Guidelines for Kindergarten Construction and Equipment“, in force since October 1992, being revised and updated at the beginning of 2006. Currently, the accident prevention regulations for day care facilities for children (DGUV regulation 82, previously GUV-VS2) apply.

In April 2009, the German Social Accident Insurance (DGUV) also published the BG/GUV-SR S2 rule „Kindertageseinrichtungen“ („Child Day Care Facilities“). This has since been transferred to DGUV Rule 102-002.

According to §9 of DGUV Regulation 82, walls and columns must be designed in such a way that the risk of injury from sharp edges and pointed rough surfaces is avoided.

Stair treads must be easily recognisable in accordance with §12, (2) and must not be sharp-edged. These requirements are specified in the DGUV regulation 102-002 as follows:

- For walls and columns up to a height of 2.00 m, the following designs, among others, are recommended in order to avoid the risk of injury:
 - Rounding radius ≥ 2 mm
 - broken or chamfered edges
 - (corresponding to the radius of curvature ≥ 2 mm)

- rounded corner plaster rails
- The following designs are recommended for stair treads in order to avoid the risk of injury:
 - Rounding radius ≥ 2 mm
 - broken or chamfered edges
 - (corresponding to the radius of curvature ≥ 2 mm)

PROTEKTOR considers these requirements when modifying existing and developing new profiles. As a result, a dedicated product range for forming edges has evolved over time. Solutions for forming edges that comply with the required safety aspects can be found among the numerous profiles. This applies not only to projects that are subject to these regulations, of course, but for any buildings where particular importance is placed on accident protection and on minimizing the risk of injury from edges.

PROTEKTOR information: Profiles described in PROTEKTOR literature as having a radius $r = 2$ mm or diameter $d = 4$ mm should not be used for kindergartens and schools as manufacturing tolerances may result in the actual dimensions being marginally smaller.

Accordingly, all profiles with radius/diameter $r \geq 2.5$ mm / $d \geq 5$ mm are particularly suited.

PARTICULARLY SUITABLE PLASTER PROFILES FOR INDOOR USE

Item-Nr.	Plaster thickness (mm)	Length (cm)	Material	Remark
1015	8	240, 250, 300	Galvanized steel	$r = 4,75$ mm / $d = 9,5$ mm
1005	10	200, 250, 260, 300	Galvanized steel	$r = 3,75$ mm / $d = 7,5$ mm
1160	15	295	Galvanized steel	$r = 20$ mm / $d = 40$ mm, Profile edge can be fully covered with plaster
1041	12	250	Galvanized steel ²⁾	$r = 4$ mm / $d = 8$ mm, flexible, for arches, etc.
7426	20	300	Galvanized steel	$r = 2,5$ mm / $d = 5$ mm
9571	10	260	Aluminium white ¹⁾	$r = 12,5$ mm! / $d = 17,5$ mm! Profile edge cannot be covered with plaster
2041	–	200, 250	Stainless steel ³⁾	$r = 3,5$ mm / $d = 7$ mm, for retrofitting
2066	–	250	Stainless steel ³⁾	$r = 3,5$ mm / $d = 7$ mm, for retrofitting
2215	8	260	Stainless steel	$r = 4,75$ mm / $d = 9,5$ mm
7476	10	300	Stainless steel	$r = 2,5$ mm / $d = 5$ mm
2026	16 incl. anchor)	200, 250, 300	Stainless steel ³⁾	$r = 4$ mm / $d = 8$ mm, plus sliding anchor 2072
7478	15	250, 300	Stainless steel	$r = 2,5$ mm / $d = 5$ mm
7483	20	300	Stainless steel	$r = 2,5$ mm / $d = 5$ mm
2027	21 incl. anchor)	200, 250, 300	Stainless steel ³⁾	$r = 10$ mm / $d = 20$ mm, plus sliding anchor 2073

PARTICULARLY SUITABLE PLASTER PROFILES FOR OUTDOOR USE

Art.-Nr.	Putzdicke (mm)	Längen (cm)	Werkstoff	Bemerkung
1013	14	200,225,250,260,275,300	Galvanized steel ²⁾	$r = 4$ mm / $d = 8$ mm
1014	20	250, 300	Galvanized steel ²⁾	$r = 4,25$ mm / $d = 8,5$ mm
1020	10	225, 250, 300	Galvanized steel ²⁾	$r = 4,25$ mm / $d = 8,5$ mm
1028	15	250, 300	Galvanized steel ²⁾	$r = 3,5$ mm / $d = 7$ mm
1041	12	250	Galvanized steel ²⁾	$r = 4$ mm / $d = 8$ mm, flexible, for arches, etc.
1086	12	300	Galvanized steel ²⁾	$r = 4$ mm / $d = 8$ mm, Profile edge can be fully covered with plaster
11601	15	295	Galvanized steel	$r = 13$ mm / $d = 26$ mm, Profile edge cannot be covered with plaster

PARTICULARLY SUITABLE PLASTER PROFILES FOR DRYWALL USE

Item-Nr.	Plaster thickness (mm)	Length (cm)	Material	Remark
3763	–	305	PVC white	$r = 2,5$ mm / $d = 5$ mm
3767	–	300	PVC white	$r = 2,5$ mm / $d = 5$ mm, flexible, for arches, etc.
37651	–	305	PVC white	$r = 4,5$ mm / $d = 9$ mm
3776	–	305	PVC white	$r = 17$ mm / $d = 34$ mm
3778	–	305	PVC white	$r = 17$ mm / $d = 34$ mm
3780	–	305	PVC white	$r = 23,5$ mm / $d = 47$ mm, Internal corner profile
9172	1	250, 300	Aluminium	$r = 2,75$ mm / $d = 5,5$ mm, profile for forming 135° edges

PARTICULARLY SUITABLE PROFILES FOR STAIRS AND STEPS

Item-Nr.	Plaster thickness (mm)	Length (cm)	Material	Remark
2000	–	100, 110, 120, 130, 150	Stainless steel	Nonslip class R 10
2001	–	500 + extended lengths	Stainless steel	Nonslip class R 10

¹⁾ Basic coating white; ²⁾ Coating: Rigid PVC, colour no. 10 = white; ³⁾ With protection foil (after finishing of plaster work pull off)

DRY WALL/LIGHTWEIGHT STEEL CONSTRUCTION

(1)

Profiles and other stamped items (if labelled) are manufactured on the basis of current national and/or international standards. Other tolerance levels are only valid if agreed in writing.

(2)

We reserve the right to make our profiles and stamped items from other materials whose characteristics at least meet the requirements of the standards.

(3)

All profiles and stamped items are for use in normal, temperature regulated, indoor areas, as defined by DIN EN 13964 tables 7 & 8 class B, or by DIN 18168 table 2 row 1.

(4)

All the constructions mentioned in our catalogue must be installed according to our fitting instructions and test certificates. These are constructed in line with the requirements of the DIN standards they refer to. In addition, when fitting, the manufacturer's instructions must be followed for other materials which we have not supplied. A warranty can only be given if all construction elements are purchased from PROTEKTOR (insofar as we can supply them).

(5)

We assume no liability for the stability of custom designs supplied according to customer requirements.

(6)

We only manufacture special profiles or special accessories according to customer requirements subject to exclusion of liability with regards to protected rights of third parties.

(7)

Any returns of fixed length orders, special profile and special accessory orders are excluded. For special parts, we reserve the right to deliver excess or short quantities of $\pm 10\%$.

(8) For powder coated parts, order the total required quantity to prevent differences in coating appearance. There is no guarantee that the coating in repeat orders will appear exactly the same. Returns are not accepted.

(9)

Special products, and products with special coatings requested by customers can only be manufactured on the basis of a written order and confirmation, and after supply of the necessary drawings and material specifications in writing.

(10)

No information and illustrations in our documents are binding. This also applies to any verbal explanations we may provide, unless they are confirmed in writing. Printing errors may occur.

(11)

We reserve the right to make changes to products or changes to the type or standard of packaging without notice.

(12)

Publication of this catalogue makes all earlier versions invalid.

(13)

This product information forms part of our terms and conditions of sale.

(14)

Product illustrations may differ from the product delivered.

PROTEKTORWERK

Florenz Maisch GmbH & Co. KG

We accept no liability for any printing errors or other changes. Subject to change. Previous catalogues are hereby rendered invalid.

Section 1 General • Scope

- (1) Our terms of sale shall apply exclusively. We shall not acknowledge adverse conditions or a customer's sales terms if they deviate from ours unless we have approved their validity in writing.
- (2) Any agreements made between us and the customer regarding the fulfilment of the contract shall be made in writing in this contract. The product information in the individual catalogues shall also apply.
- (3) Our terms of sale shall apply only to companies in accordance with Section 310 Paragraph 1 of the German Civil Code.
- (4) We are committed to the highest integrity, transparency and ethics in all business activities and relationships. Our current Code of Conduct [<https://www.protektor.de/en/company-profile/code-of-conduct/>] is decisive for this. We apply the same standards to our suppliers.

Section 2 Quotation • Quotation documents

- (1) If the order is to be considered a quotation according to Section 145 of the German Civil Code, we shall accept this within two weeks by means of a written order confirmation.
- (2) The minimum order value shall be 30.00 EUR. For orders under 100.00 EUR, we shall charge a small volume purchase fee of 16.00 EUR.
- (3) Special lengths are possible for plaster and facade profiles under the following conditions: Flat surcharge for set-up costs of 75.00 EUR, minimum purchase of 10 bundles, delivery time on request.
- (4) Orders of single profiles (less than a standard package) are possible for a small range of products. The list of products is available on request. For every opened standard package, we shall charge a packaging surcharge of 10.00 EUR. For plastic profiles in custom colors (minimum order quantity 100 kg) we shall charge a color surcharge of 30 %.
- (5) Dry wall profiles shall always be delivered in full packaging units - PU - only (e.g. package, carton).
- (6) Images and drawings as well as information about weights, quantities or dimensions shall generally be considered only approximate values unless they are labelled as binding in particular individual cases.
- (7) We reserve property rights and copyrights for images, drawings, calculations, and other documents. This shall also be applied to documents received in writing that are labelled „confidential“. The customer shall obtain our written permission before distribution to third parties.
- (8) Models and tools manufactured by order of the customer shall remain our property even if the customer has paid for them in part or in full.

Section 3 Prices • Payment terms

- (1) Unless indicated differently in the order confirmation, our prices shall be „ex works“.
- (2) Our prices do not include value-added tax. The applicable value-added tax shall be indicated as a separate item on the invoice at the time of billing.
- (3) Unless indicated differently in the order confirmation, the purchase price shall be due net (without deduction) within 30 days from the date of invoice. For payment within 14 days, we shall grant a 2 % discount. The legal regulations shall apply pertaining to the consequences of default in payment.
- (4) A customer shall be entitled to offset if his counterclaim has been legally established, undisputed or acknowledged by us. He shall, furthermore, be entitled to exercise a right of retention insofar as his counterclaim is based on the same contractual relationship.

Section 4 Delivery time

- (1) The delivery time indicated by us shall be based on the assumption that all technical questions have been cleared in advanced and may be exceeded by up to two weeks (or up to three weeks for custom orders) unless an explicit agreement for a fixed date has been made.
- (2) Compliance with our delivery obligation is conditional upon the intine and due and proper fulfilment of the customer's obligations. We reserve the right to defend against non-fulfilment.
- (3) If the customer is in default of acceptance or if he negligently violates other

duties of cooperation, we shall be authorized to claim the damage incurred by us, including possible additional expenses. We reserve the right to additional claims.

(4) If the requirements stated in paragraph (3) are fulfilled, the risk of accidental loss or deterioration of the delivery items shall pass to the customer at the point in time at which the customer falls into default of acceptance or debtor's delay.

(5) According to the requirements of law, we are liable to the extent that the underlying purchase agreement is a firm deal in the sense of Section 286 Paragraph 4 of the German Civil Code or Section 376 of the German Commercial Code. We shall also be liable in accordance with statutory provisions if, as a consequence of any delay in delivery for which we are responsible, the customer is entitled to assert the right that his interest in the continued fulfilment of the contract has ended.

(6) We shall furthermore be liable according to the statutory provisions, provided the delay in delivery is due to a willful or grossly negligent contractual infringement for which we are responsible; fault on the part of our representatives or subcontractors shall be attributable to us. Provided that the breach of supply agreement is not based upon an intentional breach of contract for which we are to blame, our liability to make good damages shall be limited to the foreseeable damages typical for this type of contract.

(7) We shall also be liable according to the statutory provisions if the delay in delivery for which we are responsible is due to the culpable infringement of a fundamental contractual obligation (obligation whose fulfillment makes the proper execution of the contract possible at first and on whose compliance the contractual partner may regularly trust); in this case, liability for damages is, however, limited to the foreseeable, typically occurring loss.

(8) Further statutory claims and rights on the part of the customer shall be reserved.

Section 5 Transfer of risk • Packaging costs

- (1) Unless indicated differently in the order confirmation, delivery shall be „ex works“.
- (2) Transport packing and all other packaging as covered by the German Packing Ordinance shall not be taken back; pallets shall be excluded. The customer shall have a duty to take care of disposal of packing at his own expense. Note that the option of disposal free of charge exists due to the disposal partnership with INTERSEROH GmbH (contract no. 25608).
- (3) Provided it is in agreement with the customer, we shall insure the delivery with cargo insurance, the costs of which shall be paid by the customer.

Section 6 Responsibility for defects

(1) Any claims for defects raised by the customer presuppose that he has properly fulfilled his duties to investigate and to raise a complaint set forth in Section 377 of the German Commercial Code. To the extent that the purchased items are defective, the customer can, according to his own choice, require subsequent performance in the form of removal of the defect or in the form of delivery of a new non-defective product. In the event that the defect is remedied, we shall be obliged to bear all the necessary costs for the remedying of the defect, in particular transport, labour and material costs, provided that

(2) If the subsequent fulfilment fails, the customer may, depending on their choice, either decrease the remuneration or withdraw from the contract.

(3) We shall be liable in accordance with the relevant statutory regulations, insofar as the customer asserts claims for damages arising from intent or gross negligence, including intent or gross negligence on the part of our representatives or subcontractors. Provided that we are not accused of willful breach of contract, our liability for damages shall be restricted to foreseeable, typically occurring damages.

(4) We shall be liable in accordance with the relevant statutory regulations, insofar as we culpably violate a major contractual obligation; in this case, however, the liability for damages is likewise limited to the predictable, typically occurring damages.

(5) Liability for culpable harm to life, the human body, or health remains unaffected; this applies also to the liability mandated under the German Product

Liability Law.

(6) In the absence of any provisions to the contrary above, liability shall be excluded.

(7) Liability shall furthermore be excluded in the case of non-observance of the installation and processing instructions in the product catalogs

(8) Furthermore, we accept no liability for the durability of the adhesion of powder coatings on stainless steel profiles. The smooth and dense surface of stainless steel can cause the powder coating to peel off. Liability for such cases is expressly excluded. The relevant information for the respective profiles in the product catalog and on the product data sheet must be observed.

(9) The guarantee period for defect claims is 12 months from the date of the transfer of risk unless the product information indicates a longer guarantee period.

(10) The limitation period in case of delivery regress according to Sections 478, 479, of the German Civil Code shall remain unaffected; it shall be five years from delivery of the defective item.

Section 7 Joint liability

(1) Liability for damages extending beyond Section 6 shall be excluded without consideration of the legal nature of the asserted claim. This shall apply in particular to compensation claims for damages based on fault when entering into the contract, on account of other breaches of duty or on account of tortious compensation claims for property damage in accordance with Section 823 on the German Civil Code.

(2) The limitation pursuant to para. (1) shall also apply insofar as the customer requires replacement of useless expenditures instead of a claim for compensation for the damage.

(2) To the extent that liability for damages against us is excluded or restricted, this shall also apply in regard to the personal liability of our employees, salaried workers, associates, representatives and subcontractors.

Section 8 Reserved ownership rights

(1) We reserve the title to the goods pending full settlement of all claims arising from business relationship with the customer. In the event of any breach of contract by the customer, in particular any delay in payment, we shall be entitled to take back the item of sale. The cancellation of a purchased item by us shall indicate withdrawal from the contract. The seizure of the item of sale by us shall also constitute a withdrawal from the contract. After return of the item of sale, we shall be entitled to its utilisation, the utilisation proceeds shall be set-off against the accounts payable of the customer - minus reasonable utilisation costs. An extended retention of title does not apply to deliveries against advance payment. In the case of seizures or any other intervention of third parties, the customer shall immediately notify us in writing, so that we may file a suit in accordance with Section 771 of the German Code of Civil Procedure. If the third party is not in the position to reimburse us for any court and out-of-court costs incurred for the legal proceedings pursuant to Section 771 of the German Code of Civil Procedure, the customer shall be liable for any loss incurred by us.

(2) The customer shall be entitled to resell the object sold in the ordinary course of business. In that event, the customer shall forthwith inform the third party about our reservation of title. The customer shall hereby surrender all claims to us in the amount of the recognised balance (including value-added tax) of our claims that he has accrued from the resale to his purchaser or third party. The customer shall remain authorised to collect this claim even after surrender. Our right to collect the claim ourselves shall remain unaffected by this. We shall, however, be obligated to not extract the claim as long as the customer fulfils his payment obligations from the revenues received, is not in default for payment and, in particular, no application for the initiation of insolvency proceedings has been submitted and payments have not been suspended. However, in such cases, we shall be entitled to demand that the customer notifies us of the assigned claims and the respective liable parties, provides us with all information necessary to collect the claim and submits to us all appropriate documents and notifies the liable parties (third parties) of the assignment.

(3) Any processing or restructuring of the goods by the customer shall always

be performed on our behalf. If the bought object is joined inseparably to other objects that do not belong to us, we shall acquire a share in the ownership of the new object in the proportion of the objective value of our bought object (total invoice amount including VAT) to the other connected objects at the time of the processing. Apart from the above, the same shall apply to the item arising due to processing as to the item of sale delivered with reservation.

(4) If the object is inseparably mixed with other objects which do not belong to us, we acquire the co-ownership of the new item in proportion to the value of the item purchased (invoice amount including VAT) to the other mixed items at the time of the mixing. If the mixing is carried out in such a way that the customer's item is to be regarded as the main item, then it is agreed that the customer shall transfer us proportionately co-ownership. The customer shall store the resulting sole proprietorship or co-ownership for us.

(5) The customer also assigns to us the claims against a third party (arising from the combination of the object with a property in order to collateralize our claims against him).

(6) We oblige to release the collateral due to us upon request of the customer to such an extent as the feasible value of our collateral exceeds the claims to be secured by more than 20 %; the selection of the collateral to be released is incumbent upon us.

Section 9 Prohibition of assignment

Claims shall not be passed from the customer to us.

Section 10 Deposits, Cancellation, and Cancellation Costs

(1) We reserve the right to request a deposit for individual orders. The amount of the deposit will be stated in the order confirmation.

(2) Should the Buyer wish to cancel a contract, the Buyer must send a cancellation request to us in writing or in text form. We are entitled, but not obliged, to accept a cancellation request from the Buyer within a period of 10 days following receipt of the cancellation request.

(3) If we accept the cancellation, the Buyer is obliged to pay the following cancellation costs, which shall be offset against any deposit paid:

In the event of a cancellation request within 30 days before the agreed delivery date, 100% of the paid deposit or 20% of the order value; in the event of a cancellation request more than 30 days before the agreed delivery date, 50% of paid deposit or 10% of the order value. The date of receipt by us of the respective cancellation request is binding for the calculation.

Section 11 Jurisdiction - Place of fulfilment

(1) Insofar as the supplier is a merchant, the place of jurisdiction shall be our place of business; we shall, however, be entitled to bring proceedings against the supplier before the court of his place of business.

(2) The law of the Federal Republic of Germany shall apply; the provisions of UN commercial law shall be excluded.

(3) Unless otherwise stated in the order confirmation, the place of performance shall be our place of business.

Section 12 Other

These General sales terms and conditions were prepared in German and in English. In case of interpretation or in case of a text collision, the German version shall prevail.

Our current AGB apply, to be found under www.protektor.com/AGB as well as our liability references to technical data and calculations, to be found under www.protektor.com/HAS.


We accept no liability for any printing errors or other changes. Subject to change. Previous catalogues are hereby rendered invalid.

PROTEKTORWERK Florenz Maisch GmbH & Co. KG




A large, light gray watermark of the Protektor logo is centered on the page. The logo features a thick, curved line forming an arch over the word "PROTEKTOR" in a bold, sans-serif font. Below the word, another thick, curved line forms a base, completing the circular shape of the logo.

PROTEKTOR ACADEMY

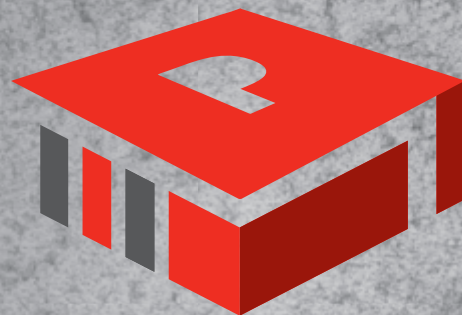

TOGETHER TO THE PERFECT PROFILE -
THE PRACTICAL EXCHANGE WITH PROTEKTOR

- COMPETENCE · EXPERTISE · KNOW-HOW
- WEBINARS ONLINE
- WORKSHOPS OFFLINE

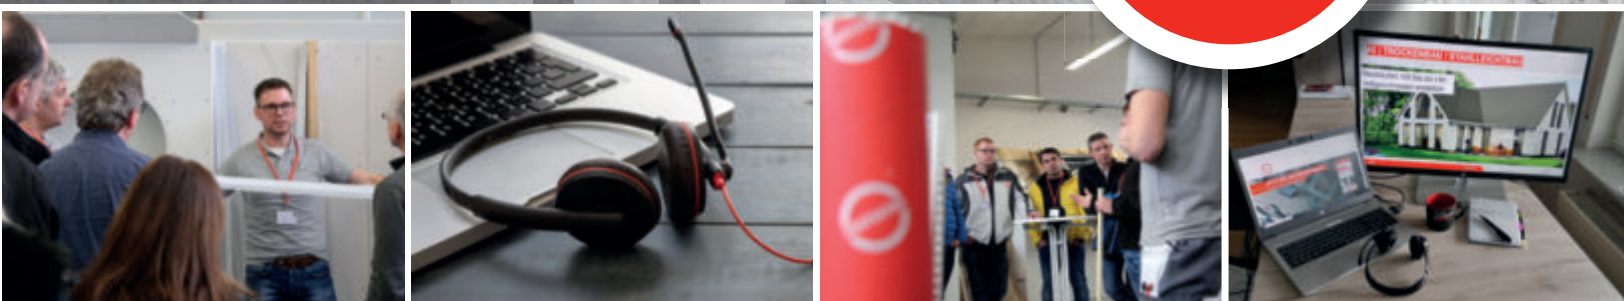

REGISTER NOW AT:

www.protektor.de/akademie



SCAN NOW
AND REGISTER »



PROTEKTOR LOYALTY CLUB


***because you are
worth it.***

Become part of our Protektor
Loyalty Club and skim the real deal!

Check all information about the programme now »

Register
now!

GET THE PROTEKTOR APP:

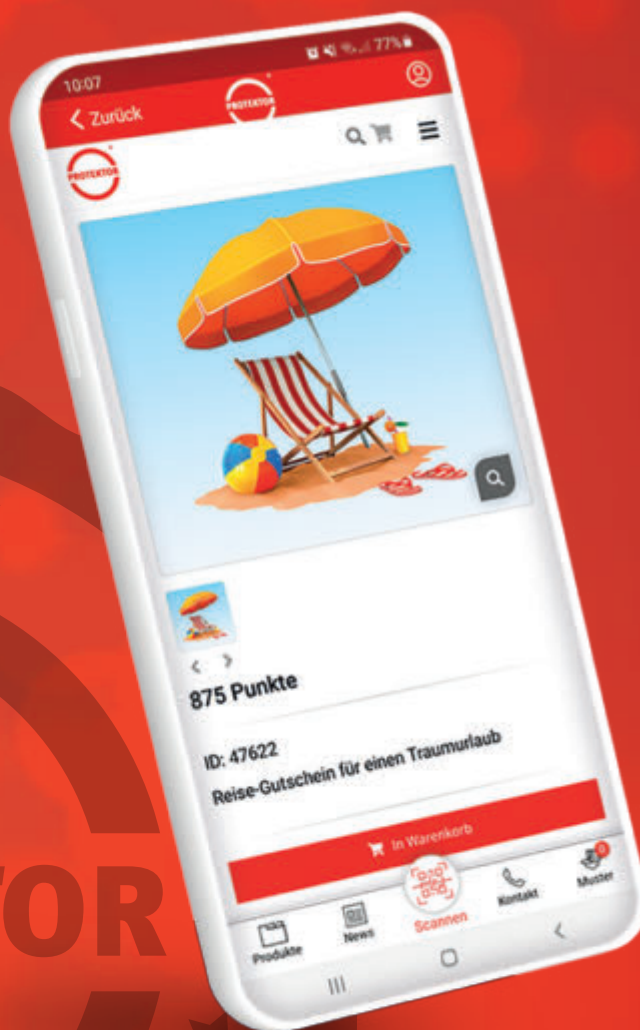

PROTEKTOR

LOYALTY CLUB

PROTEKTOR

QUALITY IN THE PROTEKTOR FAN SHOP



fanshop.protektor.com



Quality is not only the top priority for our building profiles,
but also for the products in our fan shop.
That's why we rely on the Engelbert Strauss brand for our clothing.

Discover the ultimate fan shop for true protektor fans!

- ▶ Cool clothes in the unmistakable protektor look
- ▶ Practical accessories for the perfect appearance



WITH ENGELBERT STRAUSS -
BROWSE THE PROTEKTOR FAN SHOP NOW! »



PARTNERS WITH COMPETENCE

GREAT BRITAIN

PROTEKTOR UK Limited

Protektor House
Frederick Road
Hoo Farm Industrial Estate,
Kidderminster, Worcestershire
England, DY11 7RA
Tel. +44 [0] 1562 515 200
Fax +44 [0] 1562 515 116
sales@protektor.co.uk
www.protektor.co.uk

WEMICO

Matthew Lane
Hoo Farm Industrial Estate
Worcester Road
Kidderminster, Worcester
England, DY11 7RA
Tel. +44 [0] 1562 820 123
Fax +44 [0] 1562 822 012
wemico@wemico.co.uk
www.wemico.com

FRANCE

PROTEKTOR SAS

ZAE des Portes de la Forêt
43 allée du Clos des Charmes
77090 Collégien
Tel. +33 [0] 1 60 33 25 20
Fax +33 [0] 1 60 33 06 56
info@protektor-fr.com
www.protektor.fr

SWITZERLAND

PROTEKTOR PROFIL GmbH

Riedthofstr. 184
8105 Regensdorf
Tel. +41 [0] 4484 314 14
Fax +41 [0] 4484 314 24
info@protektor.ch
www.protektor.ch

AUSTRIA

PROTEKTOR International GmbH

Viktoriastraße 58
76571 Gaggenau
Tel. +49 [0] 7225 977 0
Fax +49 [0] 7225 977 111
info@protektor.de
www.protektor.de

SPAIN

PROTEKTOR PERFILES, S.L.

Sr. Daniel Fernández-Sosa
C/Sant Auguri, 5. Bloque B.
Despacho 5
43002 Tarragona
mobile: +34 [0] 6090 237 68
info-spain@protektor.com
www.protektor.com/es



Protektor
since 1903

PROTEKTORWERK Florenz Maisch GmbH & Co. KG

Viktoriastraße 58
76571 Gaggenau

Postfach 1420
76554 Gaggenau

Tel. 07225 / 9 77-0
Fax 07225 / 9 77-111

info@protektor.com
www.protektor.com